

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295895

Luminaire Tested: P3AS13R20W2N902765DE010 E3DLD1H\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1295895  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R20W2N902765DE010 E3DLD1H\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 5000K CCT AND, 90CRI ,  
E3DLD1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 607.0 lumens  
Efficiency: N/A  
Efficacy: 49.3 lumens/watt  
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1295895  
CATALOG NUMBER: P3AS13R20W2N902765DE010 E3DLD1H\_5000K

### Luminous Intensity Polar Plot

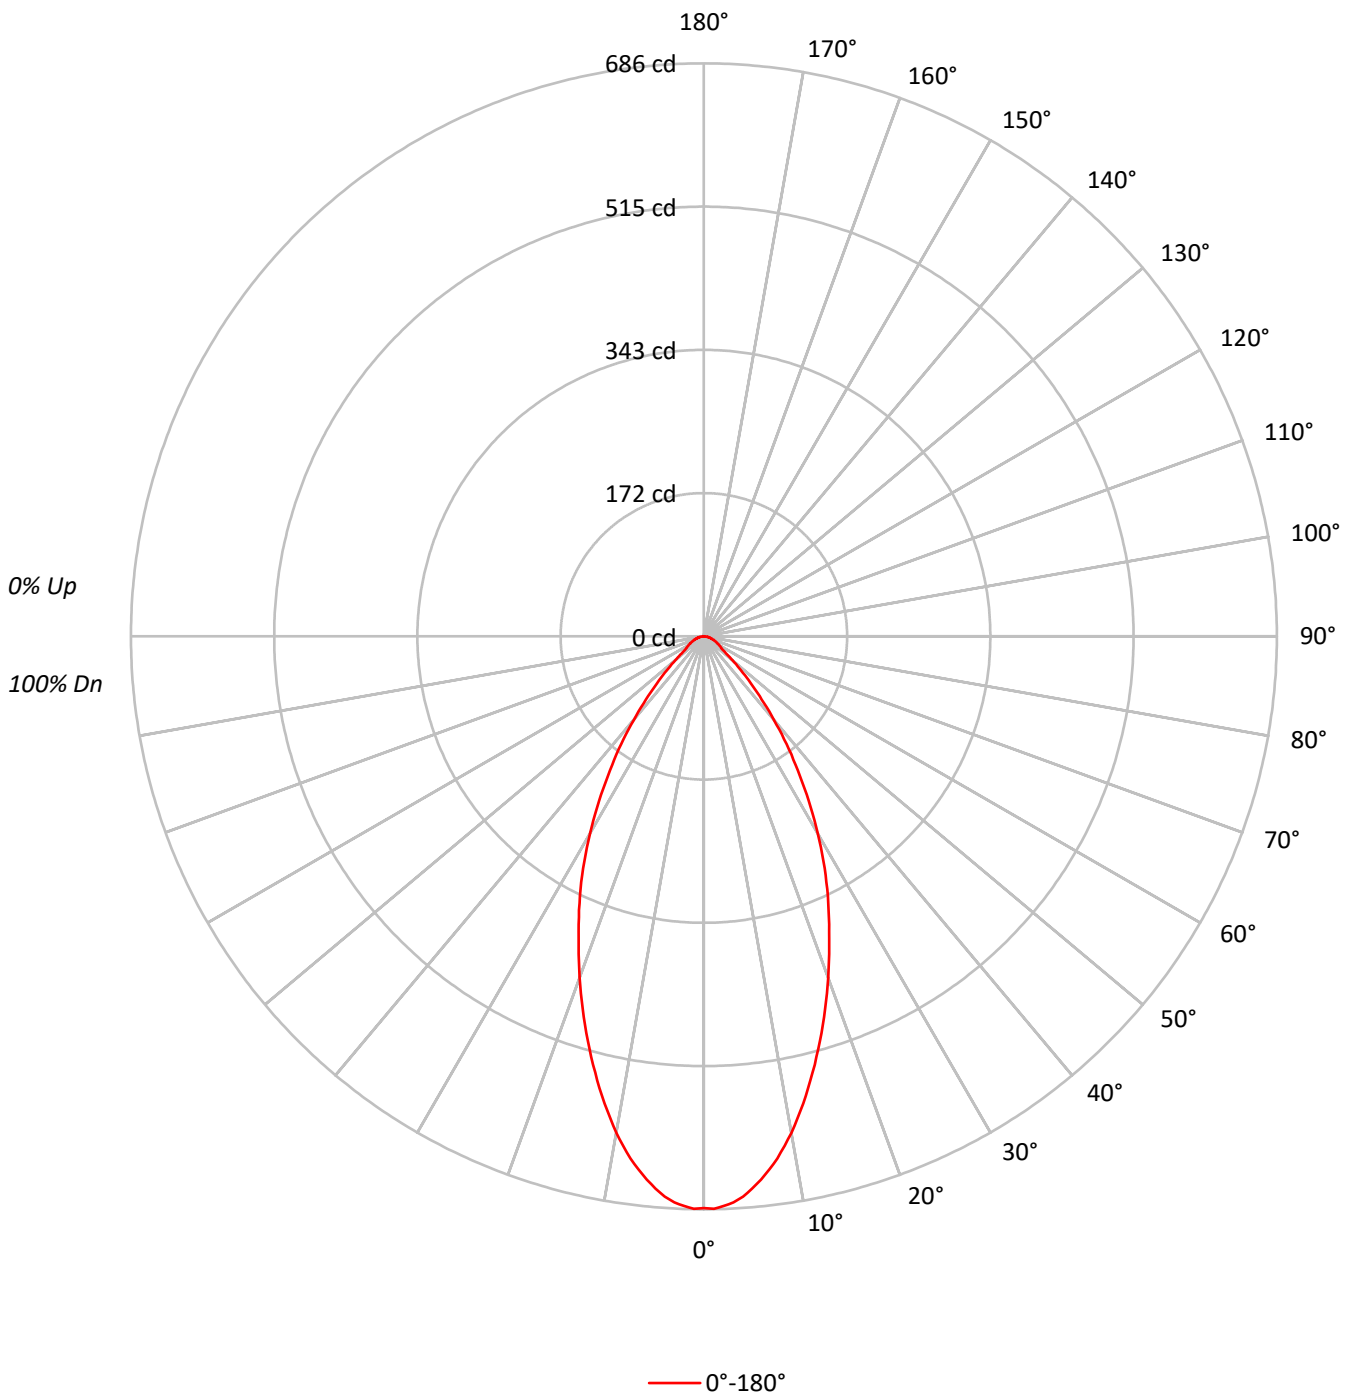



TEST NUMBER: P1295895  
 CATALOG NUMBER: P3AS13R20W2N902765DE010 E3DLD1H\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	109	106	104	110	107	105	102	103	101	99	99	98	96	96	95	93	91			91
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	90	87	85	83			83
3	100	93	87	82	98	91	86	82	88	84	80	86	82	79	84	81	78	76			76
4	94	86	79	75	92	85	79	74	82	77	73	80	76	72	78	75	72	70			70
5	89	80	73	68	87	79	73	68	77	71	67	75	70	67	73	69	66	65			65
6	84	74	68	63	82	73	67	63	72	66	62	70	65	62	69	65	61	60			60
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	60	57	55			55
8	75	65	59	54	74	64	58	54	63	58	54	62	57	53	61	57	53	52			52
9	72	61	55	50	70	61	55	50	60	54	50	59	54	50	58	53	50	48			48
10	68	58	51	47	67	57	51	47	56	51	47	56	51	47	55	50	47	45			45

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	150141
5°	146137
10°	134422
15°	118321
20°	101485
25°	85263
30°	68922
35°	52414
40°	37298
45°	24623
50°	15249
55°	10016
60°	9122
65°	8406
70°	7886
75°	7202
80°	6819
85°	5787

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 24623 cd/sqm



TEST NUMBER: P1295895

CATALOG NUMBER: P3AS13R20W2N902765DE010 E3DLD1H\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	61.4	10.1
10°-20°	145.1	23.9
20°-30°	161.1	26.5
30°-40°	122.9	20.2
40°-50°	62.9	10.4
50°-60°	25.8	4.3
60°-70°	16.1	2.7
70°-80°	9.0	1.5
80°-90°	2.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	367.6	60.6
0°-40°	490.5	80.8
0°-60°	579.2	95.4
0°-90°	607.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	607.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	685	
5°	664	61
15°	521	145
25°	352	161
35°	196	123
45°	79	63
55°	26	26
65°	16	16
75°	8	9
85°	2	3
90°	0	



TEST NUMBER: P1295895

CATALOG NUMBER: P3AS13R20W2N902765DE010 E3DLD1H\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	684.7
1°	685.5
2°	682.4
3°	678.5
4°	672.4
5°	663.9
6°	653.9
7°	643.1
8°	631.5
9°	617.6
10°	603.7
12.5°	563.6
15°	521.2
17.5°	478.1
20°	434.9
22.5°	391.7
25°	352.4
27.5°	313.1
30°	272.2
32.5°	233.6
35°	195.8
37.5°	162.7
40°	130.3
42.5°	102.6
45°	79.4
47.5°	60.1
50°	44.7
52.5°	33.2
55°	26.2
57.5°	23.9
60°	20.8
62.5°	18.5
65°	16.2
67.5°	13.9
70°	12.3
72.5°	10.0
75°	8.5
77.5°	6.9
80°	5.4
82.5°	3.9
85°	2.3
87.5°	0.8
90°	0.0

(END OF REPORT)