

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1295965

Luminaire Tested: P3AS13R25W2N902750DE010 E3CD1MMS\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1295965  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R25W2N902750DE010 E3CD1MMS\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 2700K CCT AND, 90CRI , E3CD1MMS TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 882.0 lumens  
Efficiency: N/A  
Efficacy: 71.7 lumens/watt  
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1295965  
CATALOG NUMBER: P3AS13R25W2N902750DE010 E3CD1MMS\_2700K

### Luminous Intensity Polar Plot

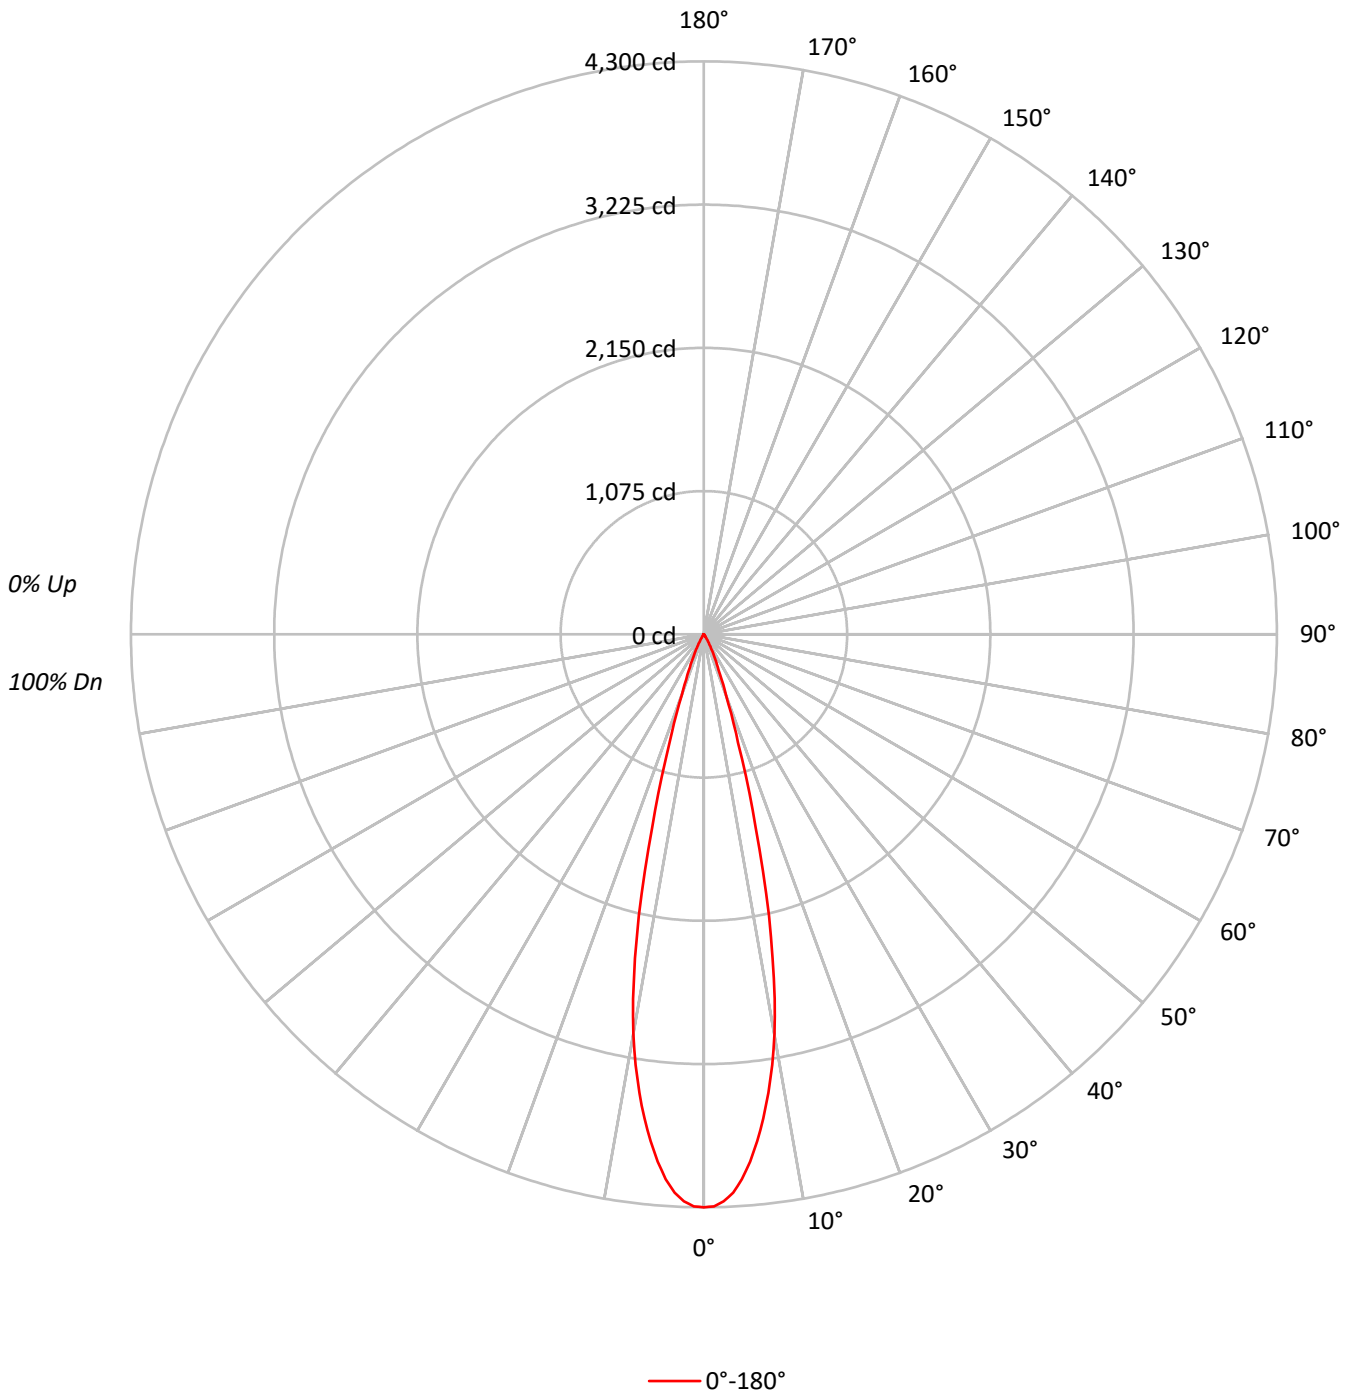



TEST NUMBER: P1295965  
 CATALOG NUMBER: P3AS13R25W2N902750DE010 E3CD1MMS\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99	100
1	115	113	111	110	113	111	109	108	107	106	105	103	103	102	100	99	99	97	97	97	97
2	112	108	105	103	110	107	104	102	104	102	100	101	99	98	98	97	96	96	96	96	94
3	108	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	92	92	92
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	89	89	89
5	103	97	93	90	101	96	93	90	95	92	89	93	91	89	92	90	88	87	87	87	87
6	100	94	90	87	99	93	90	87	92	89	87	91	88	86	90	87	86	85	85	85	85
7	97	91	88	85	96	91	87	85	90	87	84	89	86	84	88	85	83	83	83	83	83
8	95	89	85	83	94	89	85	82	88	84	82	87	84	82	86	83	81	81	81	81	81
9	93	87	83	80	92	86	83	80	86	82	80	85	82	80	84	82	80	79	79	79	79
10	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	80	78	77	77	77	77

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	942995
5°	874596
10°	678255
15°	340093
20°	111730
25°	44422
30°	16661
35°	4818
40°	2176
45°	868
50°	716
55°	535
60°	614
65°	726
70°	449
75°	593
80°	884
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 80°  
 Luminance: 884 cd/sqm



TEST NUMBER: P1295965  
 CATALOG NUMBER: P3AS13R25W2N902750DE010 E3CD1MMS\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	349.5	39.6
10°-20°	416.9	47.3
20°-30°	94.0	10.7
30°-40°	15.2	1.7
40°-50°	2.8	0.3
50°-60°	1.5	0.2
60°-70°	1.3	0.1
70°-80°	0.7	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	860.4	97.5
0°-40°	875.6	99.3
0°-60°	879.9	99.8
0°-90°	882.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	882.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4300	
5°	3973	349
15°	1498	417
25°	184	94
35°	18	15
45°	3	3
55°	1	1
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1295965  
CATALOG NUMBER: P3AS13R25W2N902750DE010 E3CD1MMS\_2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	4300.4
1°	4293.4
2°	4258.8
3°	4195.0
4°	4098.7
5°	3973.3
6°	3823.6
7°	3661.5
8°	3475.8
9°	3272.7
10°	3046.1
11°	2784.9
12°	2484.2
13°	2169.6
14°	1832.1
15°	1498.1
17.5°	853.7
20°	478.8
22.5°	289.0
25°	183.6
27.5°	112.9
30°	65.8
32.5°	34.6
35°	18.0
37.5°	11.8
40°	7.6
42.5°	4.9
45°	2.8
47.5°	2.1
50°	2.1
52.5°	2.1
55°	1.4
57.5°	1.4
60°	1.4
62.5°	1.4
65°	1.4
67.5°	1.4
70°	0.7
72.5°	0.7
75°	0.7
77.5°	0.7
80°	0.7
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1295965  
CATALOG NUMBER: P3AS13R25W2N902750DE010 E3CD1MMS\_2700K

CANDELA DISTRIBUTION (continued):



(END OF REPORT)