

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1296015

Luminaire Tested: P3AS13R25W2N902750DE010 E3DL1MW\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1296015  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-11)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R25W2N902750DE010 E3DL1MW\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 2700K CCT AND, 90CRI ,  
E3DL1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 725.0 lumens  
Efficiency: N/A  
Efficacy: 58.9 lumens/watt  
Spacing Criteria (0/90/45): 0.49 / 0.49 / 0.51  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1296015  
CATALOG NUMBER: P3AS13R25W2N902750DE010 E3DL1MW\_2700K

### Luminous Intensity Polar Plot

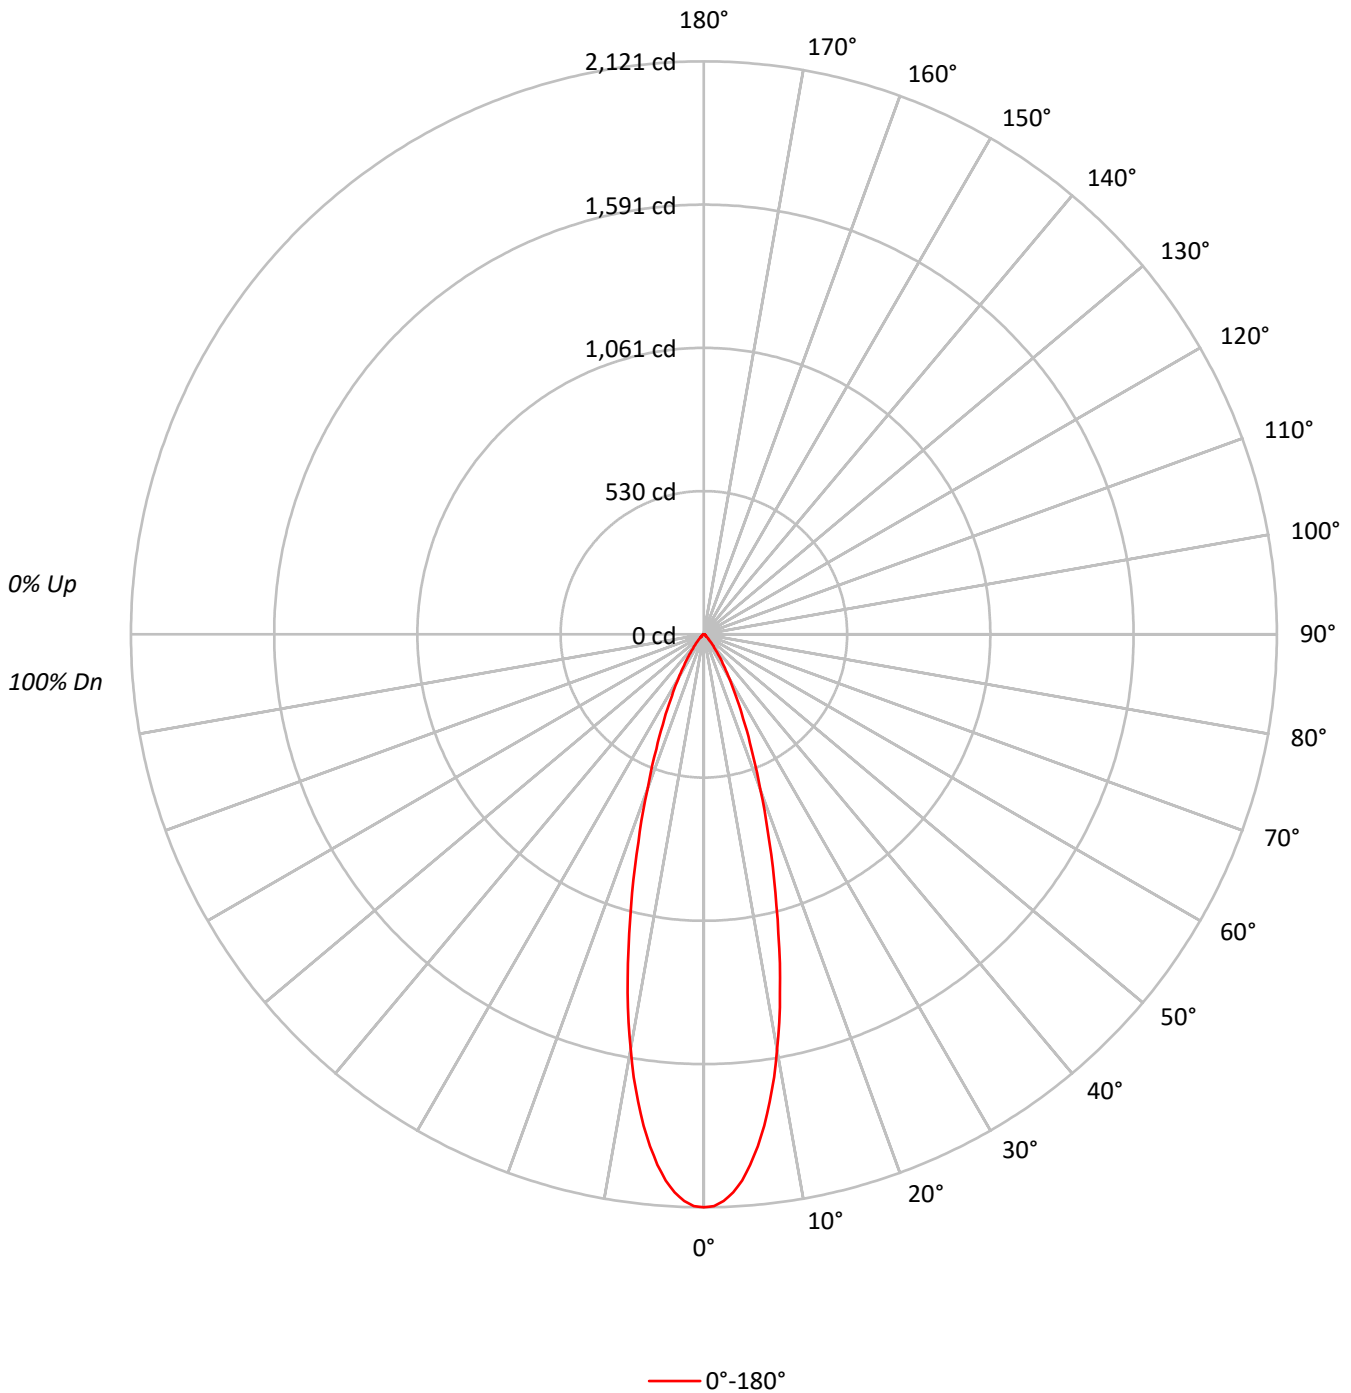



TEST NUMBER: P1296015

CATALOG NUMBER: P3AS13R25W2N902750DE010 E3DL1MW\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20					
RC	80				70				50				30				10			0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98	97	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	93	92	95
2	110	105	102	99	107	104	101	98	101	98	96	98	96	94	95	93	92	90	91	89	87	90
3	105	100	96	92	103	98	95	91	96	93	90	94	91	89	91	89	87	86	88	85	83	86
4	101	95	90	87	99	94	89	86	92	88	85	90	87	84	88	85	83	82	86	83	80	82
5	97	90	85	82	96	89	85	81	88	84	81	86	83	80	85	82	79	78	85	82	79	78
6	94	86	81	78	92	86	81	78	84	80	77	83	79	77	82	78	76	75	82	78	76	75
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	75	73	72	79	75	73	72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69	76	73	70	69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	68	73	70	67	66	73	70	67	66
10	81	73	69	65	80	73	68	65	72	68	65	72	68	65	71	67	65	64	71	67	65	64

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	465050
5°	433897
10°	347578
15°	235938
20°	142766
25°	83473
30°	47552
35°	26154
40°	13883
45°	7319
50°	4264
55°	3173
60°	2719
65°	2854
70°	2693
75°	2372
80°	1768
85°	1761

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 7319 cd/sqm



TEST NUMBER: P1296015

CATALOG NUMBER: P3AS13R25W2N902750DE010 E3DL1MW\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	174.9	24.1
10°-20°	285.7	39.4
20°-30°	163.3	22.5
30°-40°	64.4	8.9
40°-50°	19.8	2.7
50°-60°	7.8	1.1
60°-70°	5.2	0.7
70°-80°	3.0	0.4
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	623.9	86.1
0°-40°	688.4	94.9
0°-60°	715.9	98.7
0°-90°	725.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	725.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2121	
5°	1971	175
15°	1039	286
25°	345	163
35°	98	64
45°	24	20
55°	8	8
65°	6	5
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1296015  
CATALOG NUMBER: P3AS13R25W2N902750DE010 E3DL1MW\_2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2120.8
1°	2116.7
2°	2099.4
3°	2068.9
4°	2026.6
5°	1971.2
6°	1906.1
7°	1832.6
8°	1747.4
9°	1660.1
10°	1561.0
11°	1463.3
12°	1355.9
13°	1249.9
14°	1141.1
15°	1039.3
17.5°	805.8
20°	611.8
22.5°	459.4
25°	345.0
27.5°	255.7
30°	187.8
32.5°	135.8
35°	97.7
37.5°	69.3
40°	48.5
42.5°	33.3
45°	23.6
47.5°	16.6
50°	12.5
52.5°	9.7
55°	8.3
57.5°	7.6
60°	6.2
62.5°	5.5
65°	5.5
67.5°	4.9
70°	4.2
72.5°	3.5
75°	2.8
77.5°	2.1
80°	1.4
82.5°	1.4
85°	0.7
87.5°	0.7



TEST NUMBER: P1296015  
CATALOG NUMBER: P3AS13R25W2N902750DE010 E3DL1MW\_2700K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)