

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1296034

Luminaire Tested: P3AS13R25W2N902750DE010 E3DLD1GPH\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1296034  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R25W2N902750DE010 E3DLD1GPH\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 5000K CCT AND, 90CRI ,  
E3DLD1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 304.0 lumens  
Efficiency: N/A  
Efficacy: 24.7 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1296034  
CATALOG NUMBER: P3AS13R25W2N902750DE010 E3DLD1GPH\_5000K

### Luminous Intensity Polar Plot

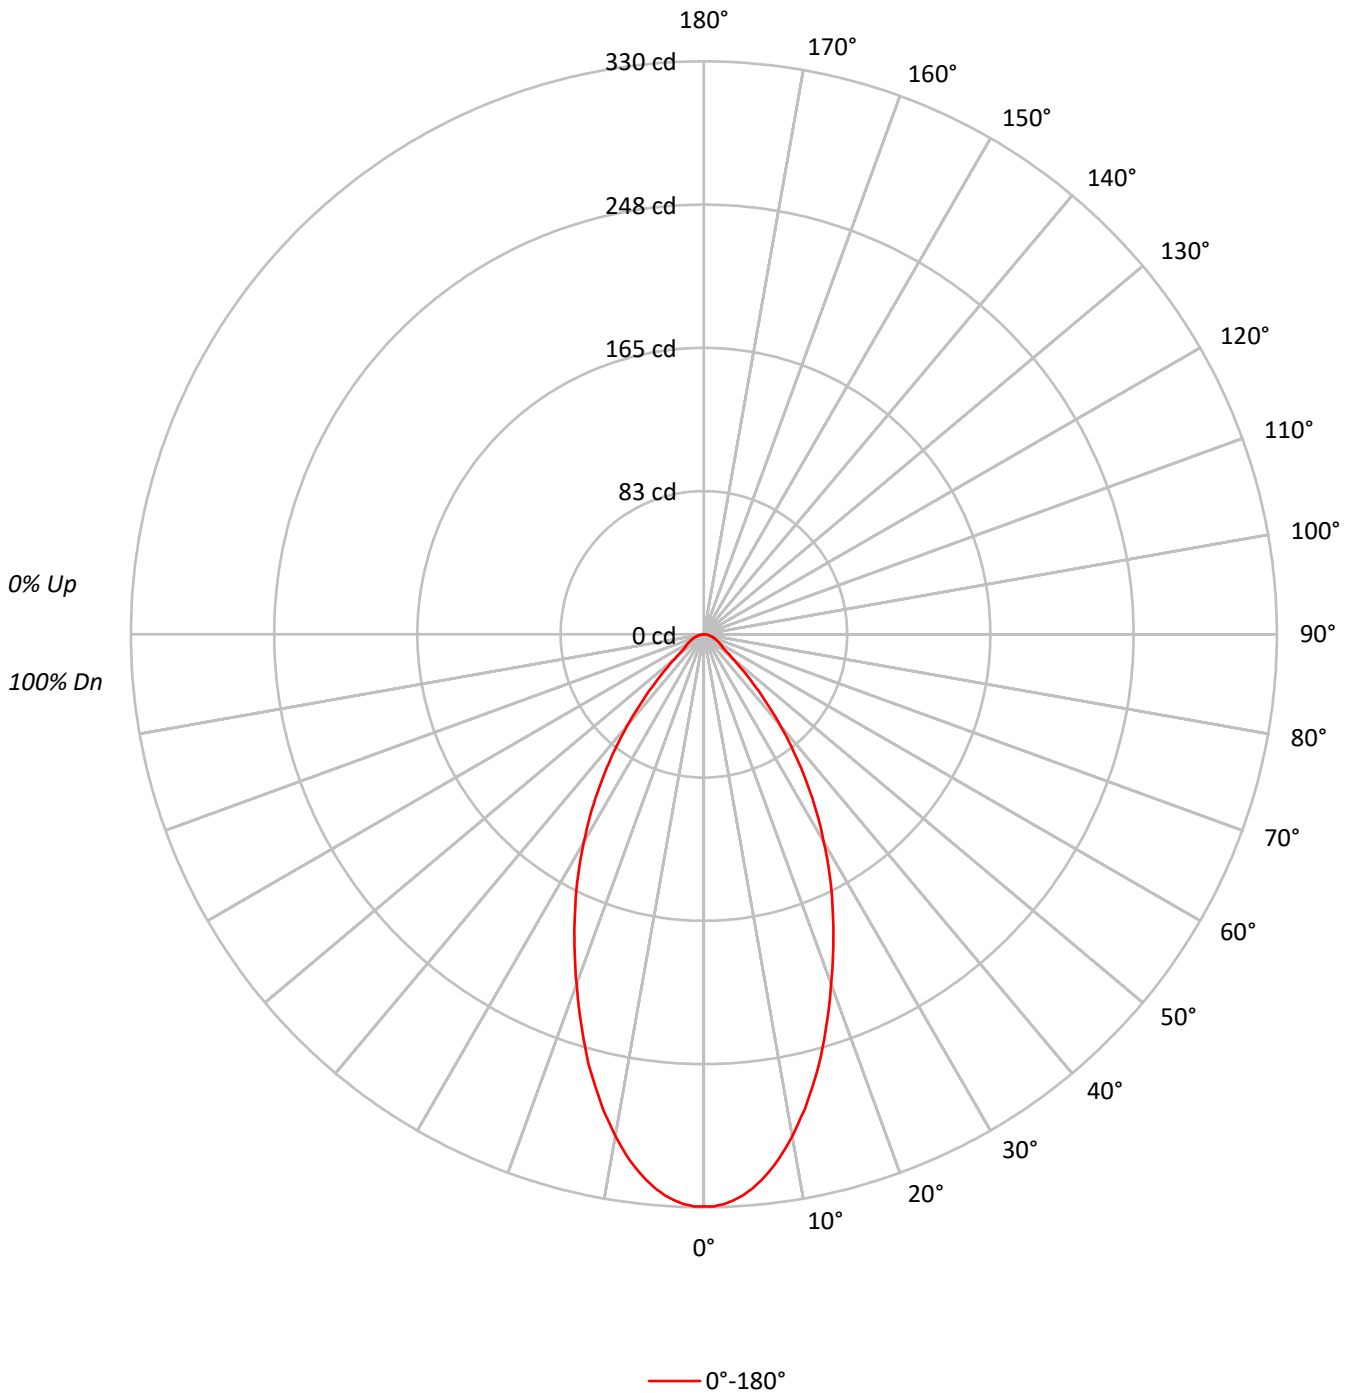



TEST NUMBER: P1296034

CATALOG NUMBER: P3AS13R25W2N902750DE010 E3DLD1GPH\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	104	110	107	105	102	103	101	99	99	98	96	96	94	93	91
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	89	87	85	83
3	100	92	87	82	98	91	86	82	88	84	80	86	82	79	83	80	78	76
4	94	85	79	74	92	84	78	74	82	77	73	80	76	72	78	74	71	70
5	89	79	73	68	87	78	72	68	76	71	67	75	70	66	73	69	66	64
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59
7	79	69	62	58	78	68	62	58	67	61	57	66	61	57	65	60	57	55
8	75	65	58	54	74	64	58	53	63	57	53	62	57	53	61	56	53	51
9	71	61	54	50	70	60	54	50	59	54	50	58	53	50	57	53	49	48
10	68	57	51	47	67	57	51	47	56	50	47	55	50	46	54	50	46	45

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	72253
5°	70526
10°	65352
15°	58207
20°	50031
25°	42511
30°	34993
35°	27278
40°	19608
45°	12435
50°	7369
55°	5085
60°	4649
65°	4307
70°	3911
75°	3558
80°	3410
85°	2768

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 12435 cd/sqm



TEST NUMBER: P1296034

CATALOG NUMBER: P3AS13R25W2N902750DE010 E3DLD1GPH\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	29.7	9.8
10°-20°	71.2	23.4
20°-30°	80.4	26.5
30°-40°	63.6	20.9
40°-50°	32.1	10.6
50°-60°	12.9	4.2
60°-70°	8.2	2.7
70°-80°	4.6	1.5
80°-90°	1.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	181.3	59.6
0°-40°	244.9	80.6
0°-60°	289.9	95.4
0°-90°	304.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	304.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	330	
5°	320	30
15°	256	71
25°	176	80
35°	102	64
45°	40	32
55°	13	13
65°	8	8
75°	4	5
85°	1	1
90°	0	



TEST NUMBER: P1296034  
CATALOG NUMBER: P3AS13R25W2N902750DE010 E3DLD1GPH\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	329.5
1°	329.5
2°	328.4
3°	326.5
4°	323.8
5°	320.4
6°	316.2
7°	311.3
8°	306.0
9°	299.9
10°	293.5
11°	286.3
12°	279.5
13°	271.5
14°	264.0
15°	256.4
17.5°	235.2
20°	214.4
22.5°	194.7
25°	175.7
27.5°	157.2
30°	138.2
32.5°	120.4
35°	101.9
37.5°	84.8
40°	68.5
42.5°	53.4
45°	40.1
47.5°	29.9
50°	21.6
52.5°	16.3
55°	13.3
57.5°	12.1
60°	10.6
62.5°	9.5
65°	8.3
67.5°	7.2
70°	6.1
72.5°	5.3
75°	4.2
77.5°	3.4
80°	2.7
82.5°	1.9
85°	1.1
87.5°	0.4



TEST NUMBER: P1296034  
CATALOG NUMBER: P3AS13R25W2N902750DE010 E3DLD1GPH\_5000K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)