

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1296080

Luminaire Tested: P3AS13R25W2N902750DE010 E3DLP1WH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1296080
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-11)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R25W2N902750DE010 E3DLP1WH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 2700K CCT AND, 90CRI ,
E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 725.0 lumens
Efficiency: N/A
Efficacy: 58.9 lumens/watt
Spacing Criteria (0/90/45): 0.49 / 0.49 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1296080
CATALOG NUMBER: P3AS13R25W2N902750DE010 E3DLP1WH_2700K

Luminous Intensity Polar Plot

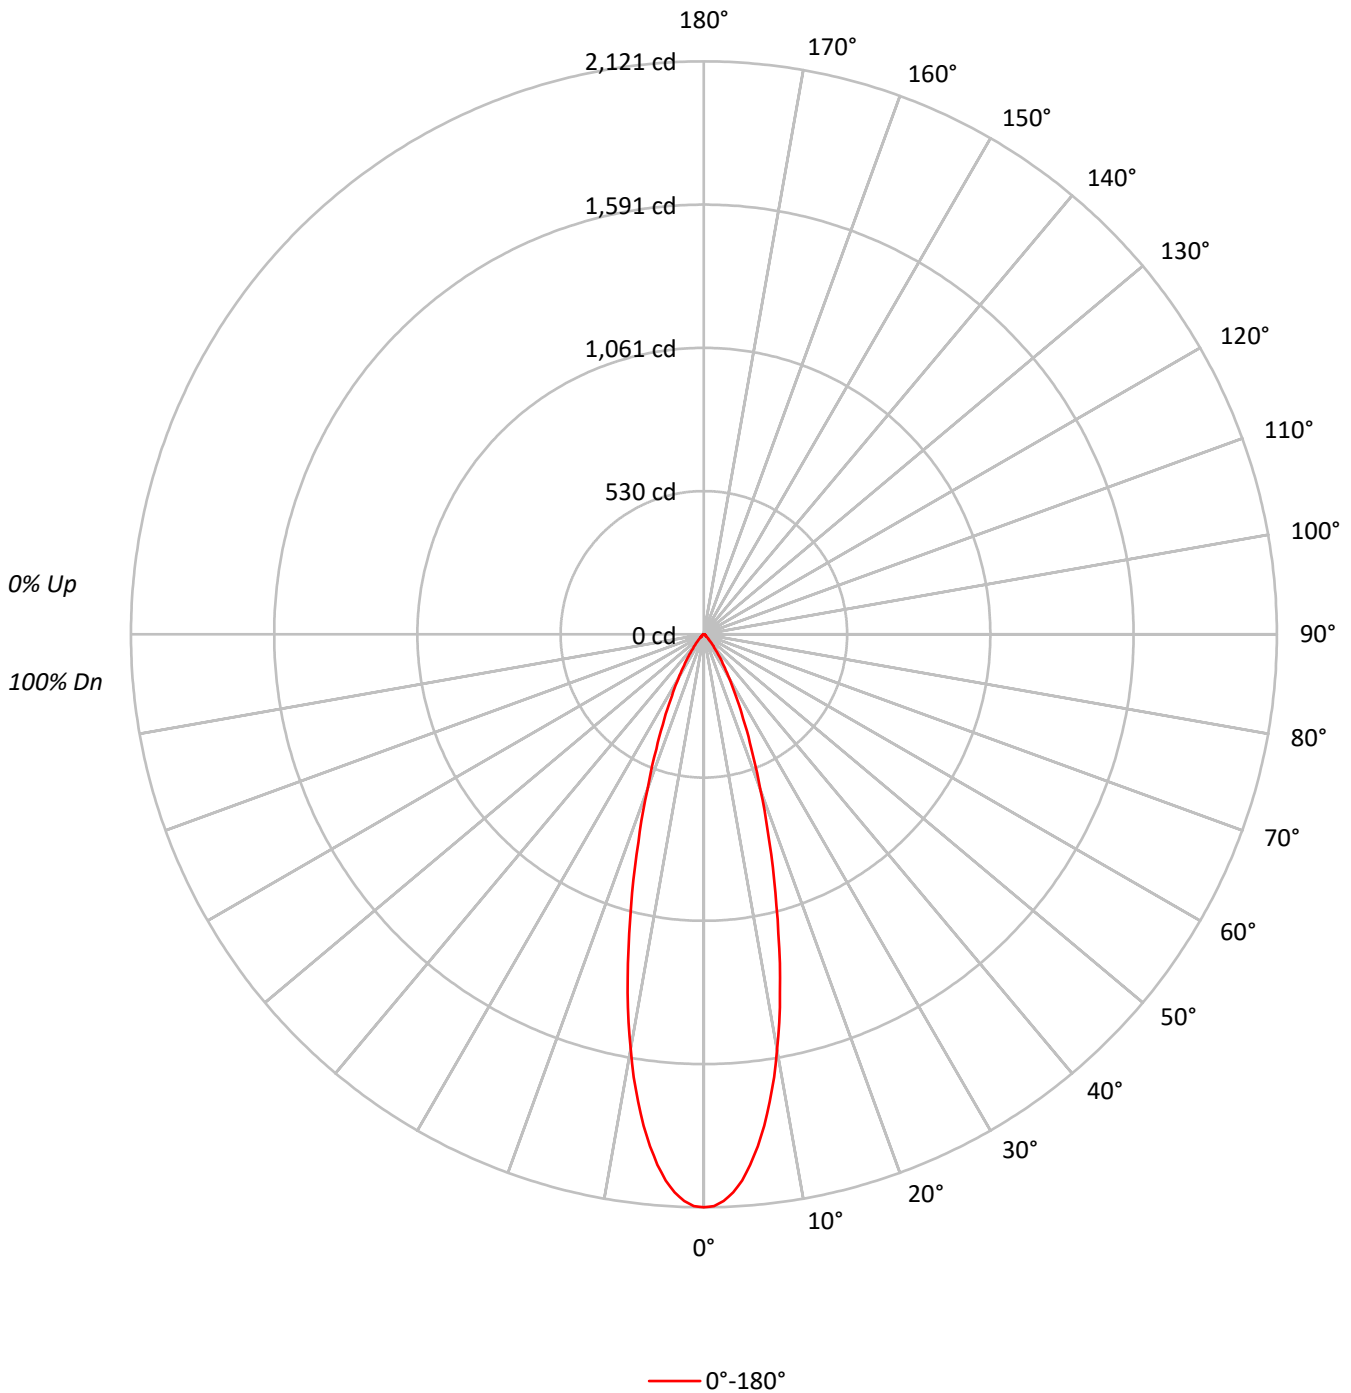



TEST NUMBER: P1296080

CATALOG NUMBER: P3AS13R25W2N902750DE010 E3DLP1WH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	174.9	24.1
10°-20°	285.7	39.4
20°-30°	163.3	22.5
30°-40°	64.4	8.9
40°-50°	19.8	2.7
50°-60°	7.8	1.1
60°-70°	5.2	0.7
70°-80°	3.0	0.4
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	623.9	86.1
0°-40°	688.4	94.9
0°-60°	715.9	98.7
0°-90°	725.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	725.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2121	
5°	1971	175
15°	1039	286
25°	345	163
35°	98	64
45°	24	20
55°	8	8
65°	6	5
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1296080
CATALOG NUMBER: P3AS13R25W2N902750DE010 E3DLP1WH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	2120.8
1°	2116.7
2°	2099.4
3°	2068.9
4°	2026.6
5°	1971.2
6°	1906.1
7°	1832.6
8°	1747.4
9°	1660.1
10°	1561.0
11°	1463.3
12°	1355.9
13°	1249.9
14°	1141.1
15°	1039.3
17.5°	805.8
20°	611.8
22.5°	459.4
25°	345.0
27.5°	255.7
30°	187.8
32.5°	135.8
35°	97.7
37.5°	69.3
40°	48.5
42.5°	33.3
45°	23.6
47.5°	16.6
50°	12.5
52.5°	9.7
55°	8.3
57.5°	7.6
60°	6.2
62.5°	5.5
65°	5.5
67.5°	4.9
70°	4.2
72.5°	3.5
75°	2.8
77.5°	2.1
80°	1.4
82.5°	1.4
85°	0.7
87.5°	0.7



TEST NUMBER: P1296080
CATALOG NUMBER: P3AS13R25W2N902750DE010 E3DLP1WH_2700K

CANDELA DISTRIBUTION (continued):



(END OF REPORT)