

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1296081

Luminaire Tested: P3AS13R25W2N902750DE010 E3DLP1WH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1296081
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-11)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R25W2N902750DE010 E3DLP1WH_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 3000K CCT AND, 90CRI ,
E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 800.0 lumens
Efficiency: N/A
Efficacy: 65.0 lumens/watt
Spacing Criteria (0/90/45): 0.49 / 0.49 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1296081
CATALOG NUMBER: P3AS13R25W2N902750DE010 E3DLP1WH_3000K

Luminous Intensity Polar Plot

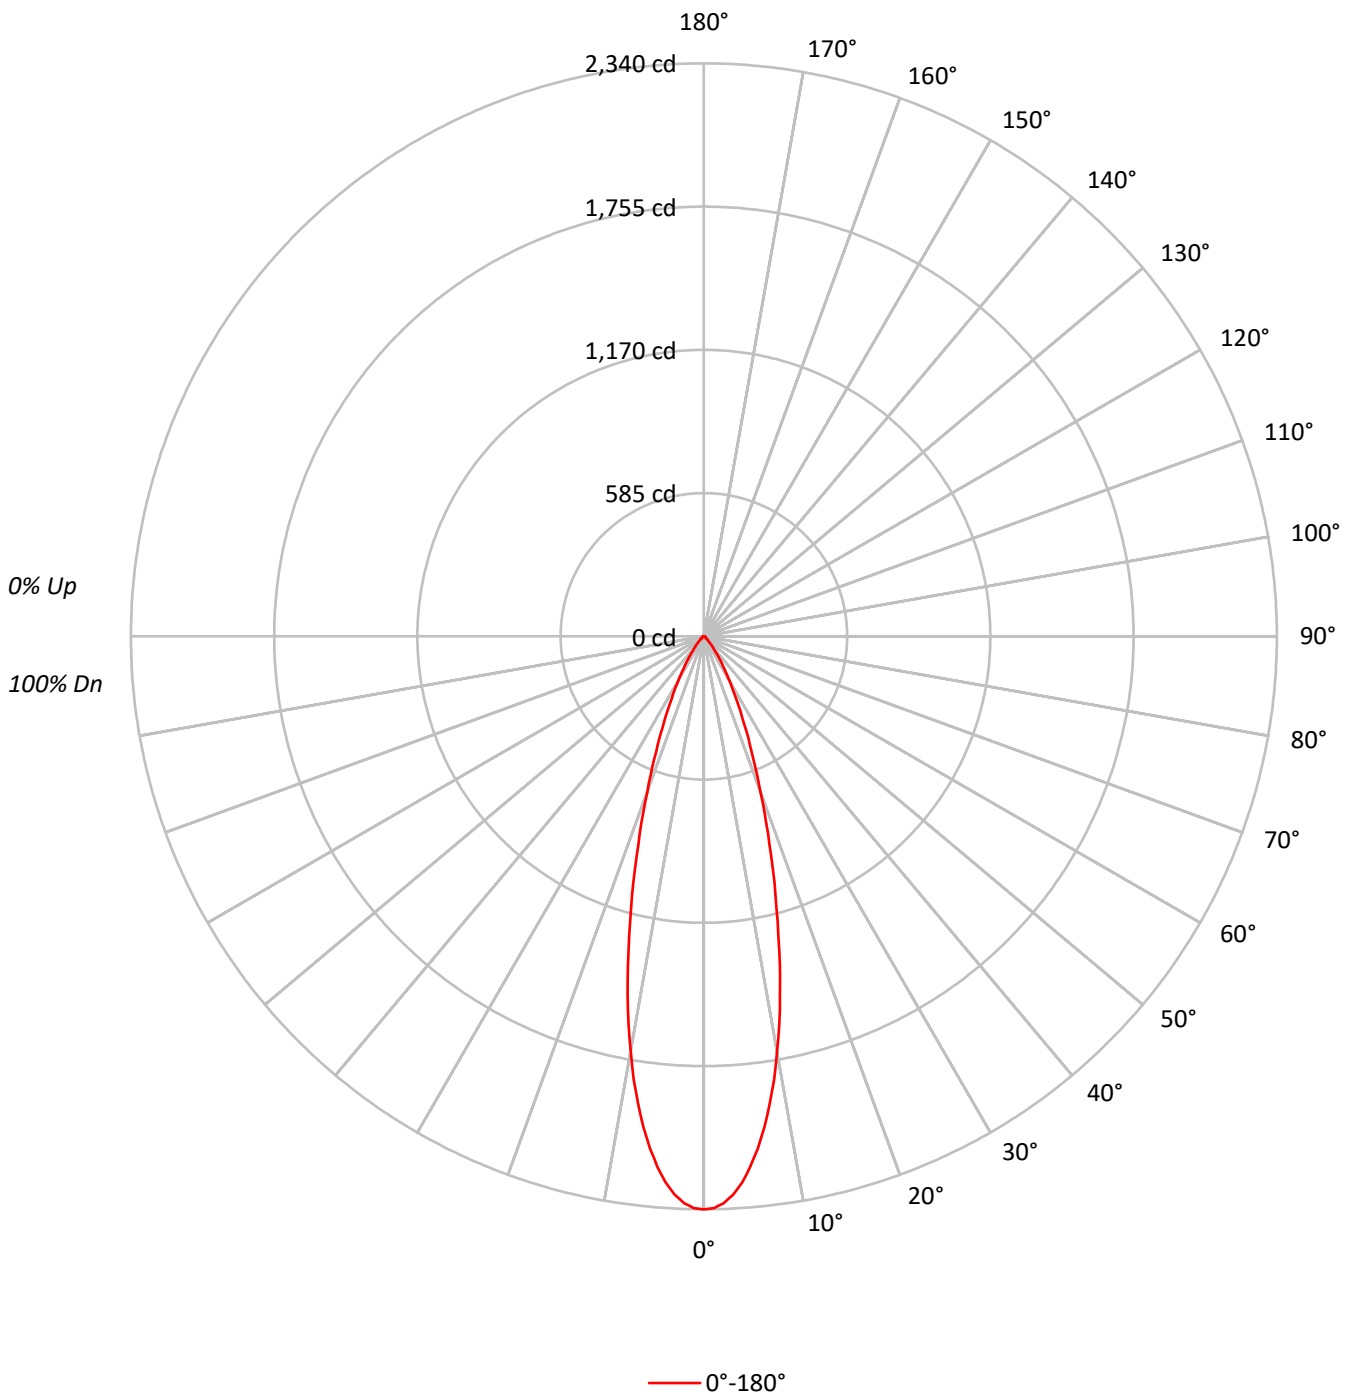



TEST NUMBER: P1296081

CATALOG NUMBER: P3AS13R25W2N902750DE010 E3DLP1WH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	193.0	24.1
10°-20°	315.3	39.4
20°-30°	180.2	22.5
30°-40°	71.1	8.9
40°-50°	21.8	2.7
50°-60°	8.6	1.1
60°-70°	5.8	0.7
70°-80°	3.2	0.4
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	688.5	86.1
0°-40°	759.6	94.9
0°-60°	790.0	98.7
0°-90°	800.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	800.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2340	
5°	2175	193
15°	1147	315
25°	381	180
35°	108	71
45°	26	22
55°	9	9
65°	6	6
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1296081
CATALOG NUMBER: P3AS13R25W2N902750DE010 E3DLP1WH_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	2340.2
1°	2335.7
2°	2316.5
3°	2282.9
4°	2236.3
5°	2175.1
6°	2103.2
7°	2022.2
8°	1928.2
9°	1831.8
10°	1722.5
11°	1614.7
12°	1496.2
13°	1379.2
14°	1259.2
15°	1146.8
17.5°	889.2
20°	675.1
22.5°	506.9
25°	380.7
27.5°	282.1
30°	207.2
32.5°	149.8
35°	107.8
37.5°	76.5
40°	53.5
42.5°	36.7
45°	26.0
47.5°	18.3
50°	13.8
52.5°	10.7
55°	9.2
57.5°	8.4
60°	6.9
62.5°	6.1
65°	6.1
67.5°	5.4
70°	4.6
72.5°	3.8
75°	3.1
77.5°	2.3
80°	1.5
82.5°	1.5
85°	0.8
87.5°	0.8



TEST NUMBER: P1296081
CATALOG NUMBER: P3AS13R25W2N902750DE010 E3DLP1WH_3000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)