

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1296521

Luminaire Tested: P3AS13R30W2N902765DE010 E3D1WMH\_5000K

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1296521  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R30W2N902765DE010 E3D1WMH\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 5000K CCT AND, 90CRI ,  
E3D1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 974.0 lumens  
Efficiency: N/A  
Efficacy: 79.2 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.47  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1296521  
CATALOG NUMBER: P3AS13R30W2N902765DE010 E3D1WMH\_5000K

### Luminous Intensity Polar Plot

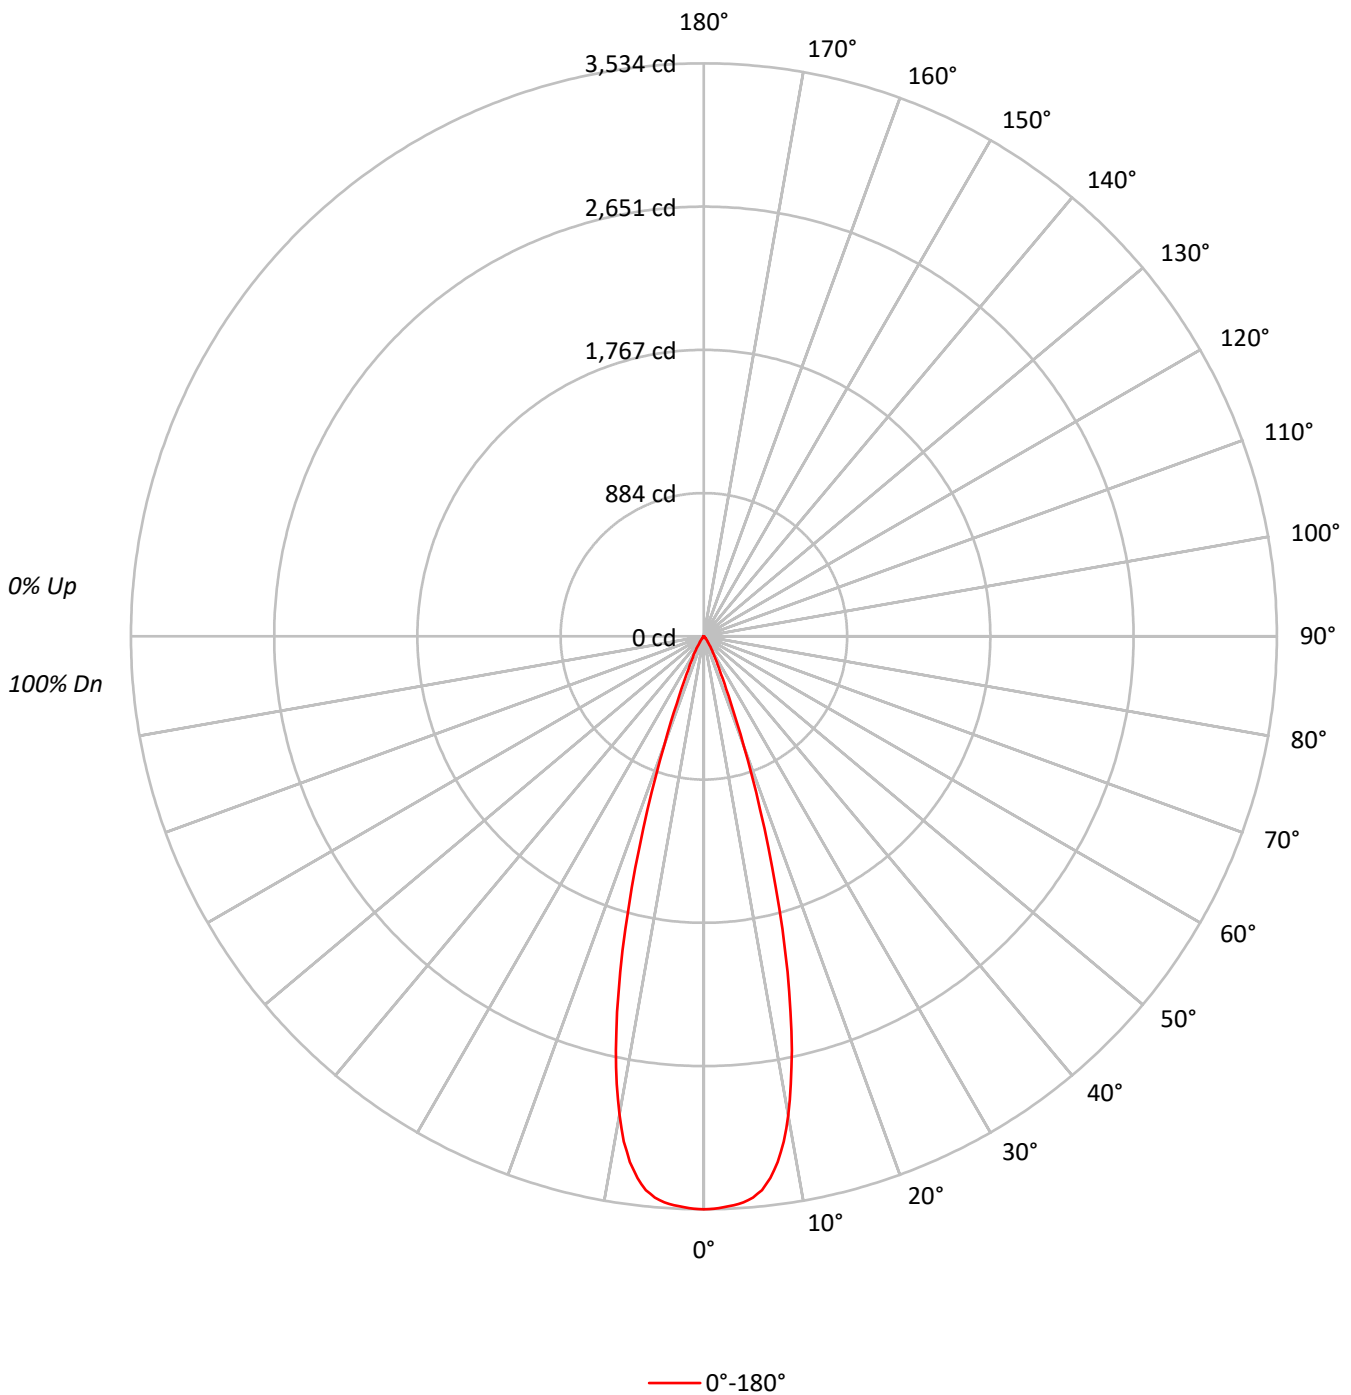



TEST NUMBER: P1296521

CATALOG NUMBER: P3AS13R30W2N902765DE010 E3D1WMH\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98	100
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	96	95	94
2	111	108	105	102	109	106	103	101	103	101	99	100	98	97	97	96	95	94	93	92	90
3	108	103	100	97	106	102	99	96	99	97	95	97	95	93	95	93	92	90	89	88	88
4	105	99	95	92	103	98	95	92	96	93	91	94	92	90	93	91	89	88	86	85	85
5	101	96	92	89	100	95	91	88	93	90	87	92	89	87	90	88	86	85	84	83	82
6	99	92	88	85	97	92	88	85	90	87	84	89	86	84	88	85	83	82	81	80	80
7	96	89	85	82	95	89	85	82	88	84	82	87	84	81	86	83	81	80	79	78	78
8	93	87	83	80	92	86	82	80	85	82	79	84	81	79	84	81	79	78	77	76	76
9	91	84	80	77	90	84	80	77	83	79	77	82	79	77	82	79	77	76	75	74	74
10	88	82	78	75	88	81	78	75	81	77	75	80	77	75	80	77	75	74	73	72	72

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	774938
5°	764845
10°	667768
15°	424452
20°	168155
25°	56156
30°	26131
35°	11832
40°	4551
45°	2233
50°	648
55°	306
60°	175
65°	208
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2233 cd/sqm



TEST NUMBER: P1296521

CATALOG NUMBER: P3AS13R30W2N902765DE010 E3D1WMH\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	317.7	32.6
10°-20°	492.6	50.6
20°-30°	127.0	13.0
30°-40°	29.8	3.1
40°-50°	5.8	0.6
50°-60°	0.7	0.1
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	937.3	96.2
0°-40°	967.2	99.3
0°-60°	973.7	100.0
0°-90°	974.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	974.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3534	
5°	3475	318
15°	1870	493
25°	232	127
35°	44	30
45°	7	6
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1296521  
CATALOG NUMBER: P3AS13R30W2N902765DE010 E3D1WMH\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3534.0
1°	3531.4
2°	3523.1
3°	3513.6
4°	3499.6
5°	3474.7
6°	3434.2
7°	3366.9
8°	3275.0
9°	3155.2
10°	2999.0
11°	2813.4
12°	2610.7
13°	2377.4
14°	2133.2
15°	1869.7
16°	1611.4
17°	1362.6
18°	1124.1
19°	905.2
20°	720.6
21°	567.1
22°	446.1
23°	353.1
24°	282.8
25°	232.1
26°	193.6
27°	164.5
28°	142.2
29°	121.7
30°	103.2
32.5°	65.0
35°	44.2
37.5°	27.6
40°	15.9
42.5°	10.6
45°	7.2
47.5°	4.2
50°	1.9
52.5°	0.8
55°	0.8
57.5°	0.4
60°	0.4
62.5°	0.4
65°	0.4



TEST NUMBER: P1296521  
CATALOG NUMBER: P3AS13R30W2N902765DE010 E3D1WMH\_5000K

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.4
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)