

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1296536

Luminaire Tested: P3AS13R30W2N902765DE010 E3DL1LI\_3000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1296536  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R30W2N902765DE010 E3DL1LI\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 3000K CCT AND, 90CRI ,  
E3DL1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 809.0 lumens  
Efficiency: N/A  
Efficacy: 65.8 lumens/watt  
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1296536  
CATALOG NUMBER: P3AS13R30W2N902765DE010 E3DL1LI\_3000K

### Luminous Intensity Polar Plot

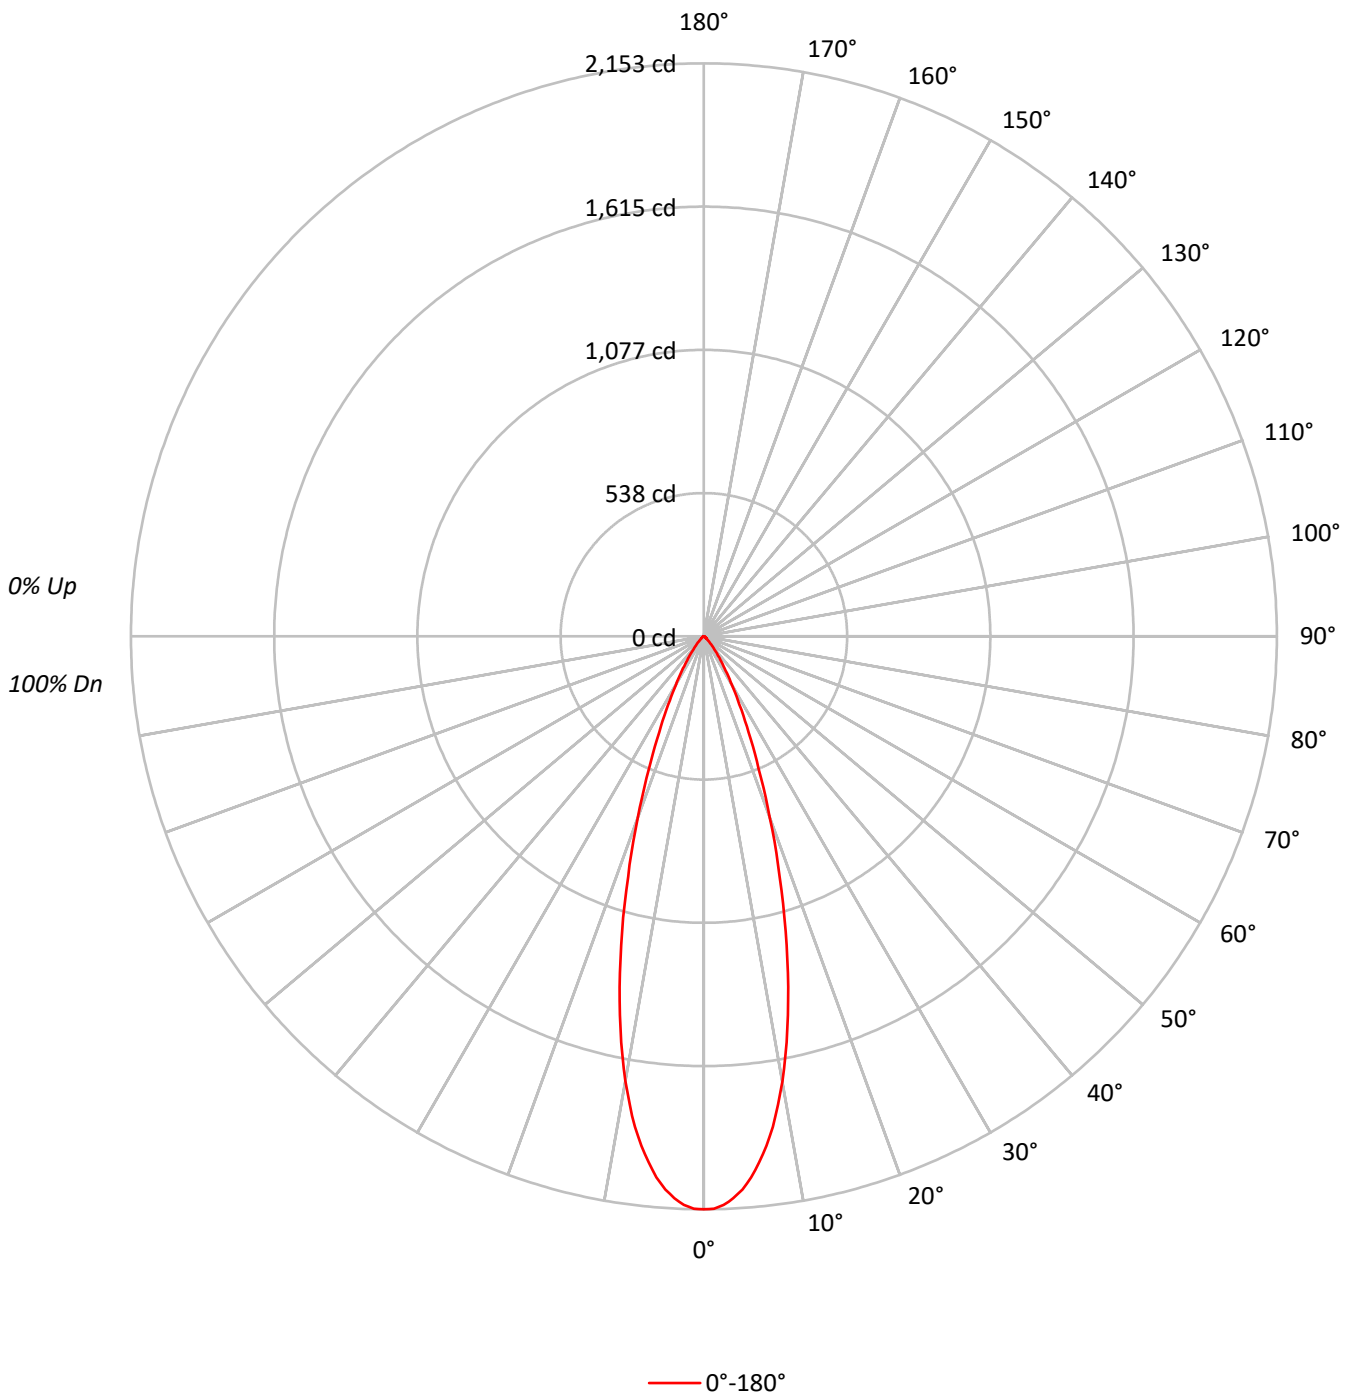



TEST NUMBER: P1296536  
 CATALOG NUMBER: P3AS13R30W2N902765DE010 E3DL1LI\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	97	97	97	95
2	110	105	102	99	107	104	101	98	101	98	96	98	96	94	95	93	92	92	92	92	90
3	105	100	96	92	103	98	95	91	96	93	90	94	91	89	91	89	87	87	87	87	86
4	101	95	90	87	99	94	89	86	92	88	85	90	87	84	88	85	83	83	83	83	82
5	97	90	85	82	96	89	85	81	88	84	81	86	83	80	85	82	79	79	79	79	78
6	94	86	81	78	92	85	81	77	84	80	77	83	79	76	81	78	76	76	76	76	75
7	90	82	77	74	89	82	77	74	81	76	73	80	76	73	79	75	73	73	73	73	71
8	87	79	74	71	86	79	74	71	78	73	70	77	73	70	76	72	70	70	70	70	69
9	84	76	71	68	83	75	71	68	75	70	67	74	70	67	73	70	67	67	67	67	66
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	71	67	65	65	65	65	63

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	472067
5°	449327
10°	377949
15°	272555
20°	169065
25°	96151
30°	53401
35°	29045
40°	15314
45°	8280
50°	4435
55°	2906
60°	2675
65°	2750
70°	2436
75°	1949
80°	1894
85°	2013

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 8280 cd/sqm



TEST NUMBER: P1296536  
 CATALOG NUMBER: P3AS13R30W2N902765DE010 E3DL1LI\_3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	183.8	22.7
10°-20°	326.7	40.4
20°-30°	188.8	23.3
30°-40°	71.7	8.9
40°-50°	22.0	2.7
50°-60°	7.4	0.9
60°-70°	5.0	0.6
70°-80°	2.7	0.3
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	699.4	86.5
0°-40°	771.1	95.3
0°-60°	800.4	98.9
0°-90°	809.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	809.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2153	
5°	2041	184
15°	1201	327
25°	397	189
35°	108	72
45°	27	22
55°	8	7
65°	5	5
75°	2	3
85°	1	1
90°	0	



TEST NUMBER: P1296536  
CATALOG NUMBER: P3AS13R30W2N902765DE010 E3DL1LI\_3000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2152.8
1°	2151.3
2°	2138.3
3°	2113.9
4°	2083.3
5°	2041.3
6°	1987.8
7°	1928.2
8°	1861.7
9°	1782.2
10°	1697.4
11°	1605.7
12°	1508.6
13°	1407.0
14°	1303.8
15°	1200.6
17.5°	946.9
20°	724.5
22.5°	537.3
25°	397.4
27.5°	288.9
30°	210.9
32.5°	152.1
35°	108.5
37.5°	75.7
40°	53.5
42.5°	37.4
45°	26.7
47.5°	18.3
50°	13.0
52.5°	9.2
55°	7.6
57.5°	6.9
60°	6.1
62.5°	5.3
65°	5.3
67.5°	4.6
70°	3.8
72.5°	3.1
75°	2.3
77.5°	2.3
80°	1.5
82.5°	1.5
85°	0.8
87.5°	0.0



TEST NUMBER: P1296536  
CATALOG NUMBER: P3AS13R30W2N902765DE010 E3DL1LI\_3000K

**CANDELA DISTRIBUTION (continued):**

0°  
90° | 0.0

(END OF REPORT)