

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1296563

Luminaire Tested: P3AS13R30W2N902765DE010 E3DLD1GPH\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1296563  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-14)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R30W2N902765DE010 E3DLD1GPH\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 5000K CCT AND, 90CRI ,  
E3DLD1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 308.0 lumens  
Efficiency: N/A  
Efficacy: 25.0 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1296563  
CATALOG NUMBER: P3AS13R30W2N902765DE010 E3DLD1GPH\_5000K

### Luminous Intensity Polar Plot

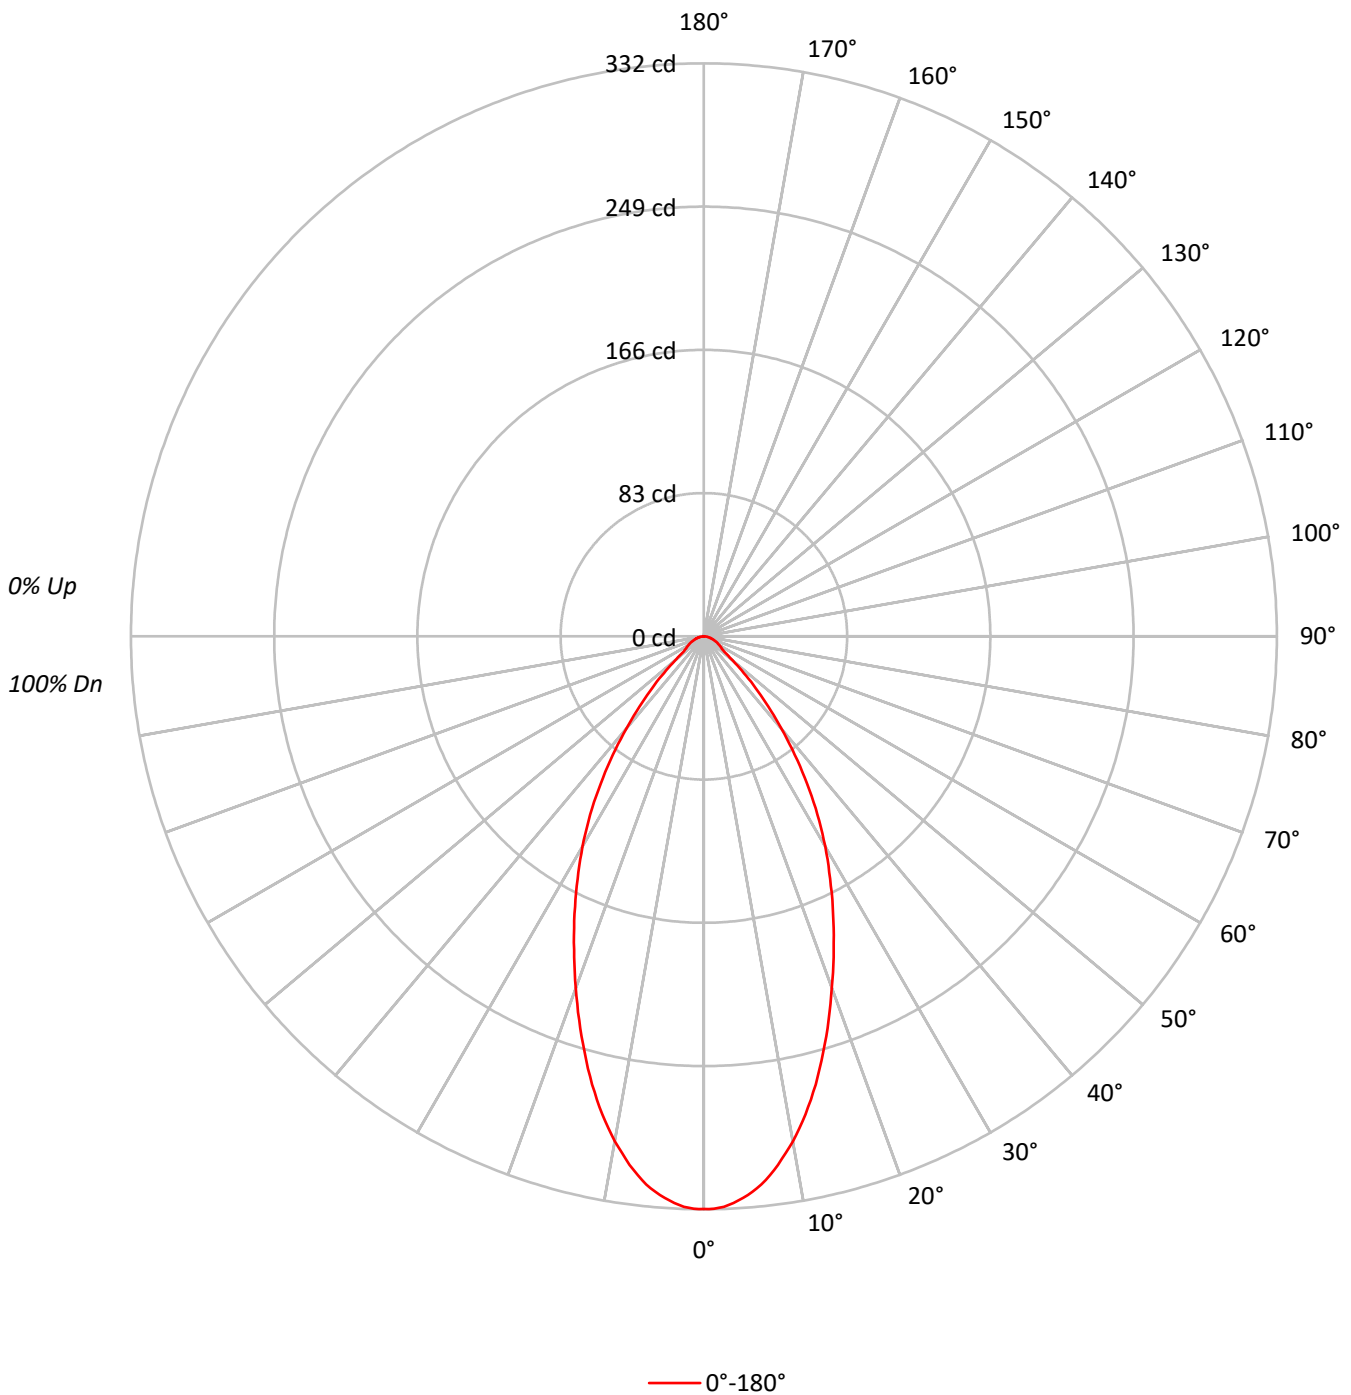



TEST NUMBER: P1296563  
 CATALOG NUMBER: P3AS13R30W2N902765DE010 E3DLD1GPH\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	112	109	106	104	110	107	105	102	103	101	99	99	98	96	96	94	93	91	91	91	91
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	89	87	85	83	83	83	83
3	100	92	87	82	98	91	86	82	88	84	80	86	82	79	84	80	78	76	76	76	76
4	94	86	79	74	92	84	79	74	82	77	73	80	76	72	78	74	71	70	70	70	70
5	89	79	73	68	87	78	72	68	76	71	67	75	70	66	73	69	66	64	64	64	64
6	84	74	67	62	82	73	67	62	71	66	62	70	65	61	69	64	61	59	59	59	59
7	79	69	62	58	78	68	62	58	67	61	57	66	61	57	65	60	57	55	55	55	55
8	75	65	58	54	74	64	58	53	63	57	53	62	57	53	61	56	53	51	51	51	51
9	71	61	54	50	70	60	54	50	59	54	50	58	53	50	57	53	49	48	48	48	48
10	68	57	51	47	67	57	51	47	56	50	47	55	50	46	54	50	46	45	45	45	45

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	72757
5°	71120
10°	66153
15°	58865
20°	50614
25°	42898
30°	35600
35°	27920
40°	20009
45°	13118
50°	7471
55°	4932
60°	4649
65°	4307
70°	3847
75°	3558
80°	3283
85°	2768

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 13118 cd/sqm



TEST NUMBER: P1296563  
 CATALOG NUMBER: P3AS13R30W2N902765DE010 E3DLD1GPH\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	30.0	9.7
10°-20°	72.1	23.4
20°-30°	81.2	26.4
30°-40°	64.9	21.1
40°-50°	33.3	10.8
50°-60°	12.6	4.1
60°-70°	8.2	2.7
70°-80°	4.4	1.4
80°-90°	1.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	183.3	59.5
0°-40°	248.2	80.6
0°-60°	294.1	95.5
0°-90°	308.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	308.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	332	
5°	323	30
15°	259	72
25°	177	81
35°	104	65
45°	42	33
55°	13	13
65°	8	8
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1296563  
CATALOG NUMBER: P3AS13R30W2N902765DE010 E3DLD1GPH\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	331.8
1°	331.8
2°	330.7
3°	328.8
4°	326.2
5°	323.1
6°	319.4
7°	314.5
8°	309.2
9°	303.1
10°	297.1
11°	290.3
12°	283.1
13°	275.5
14°	267.6
15°	259.3
17.5°	238.1
20°	216.9
22.5°	196.5
25°	177.3
27.5°	158.4
30°	140.6
32.5°	122.5
35°	104.3
37.5°	86.5
40°	69.9
42.5°	55.2
45°	42.3
47.5°	31.4
50°	21.9
52.5°	15.5
55°	12.9
57.5°	11.7
60°	10.6
62.5°	9.4
65°	8.3
67.5°	7.2
70°	6.0
72.5°	4.9
75°	4.2
77.5°	3.4
80°	2.6
82.5°	1.9
85°	1.1
87.5°	0.4



TEST NUMBER: P1296563  
CATALOG NUMBER: P3AS13R30W2N902765DE010 E3DLD1GPH\_5000K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)