

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1296755

Luminaire Tested: P3AS13R35W2N902750DE010 E3DLP1LI\_3000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1296755  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R35W2N902750DE010 E3DLP1LI\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 3000K CCT AND, 90CRI ,  
E3DLP1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 496.0 lumens  
Efficiency: N/A  
Efficacy: 40.3 lumens/watt  
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1296755  
CATALOG NUMBER: P3AS13R35W2N902750DE010 E3DLP1LI\_3000K

### Luminous Intensity Polar Plot

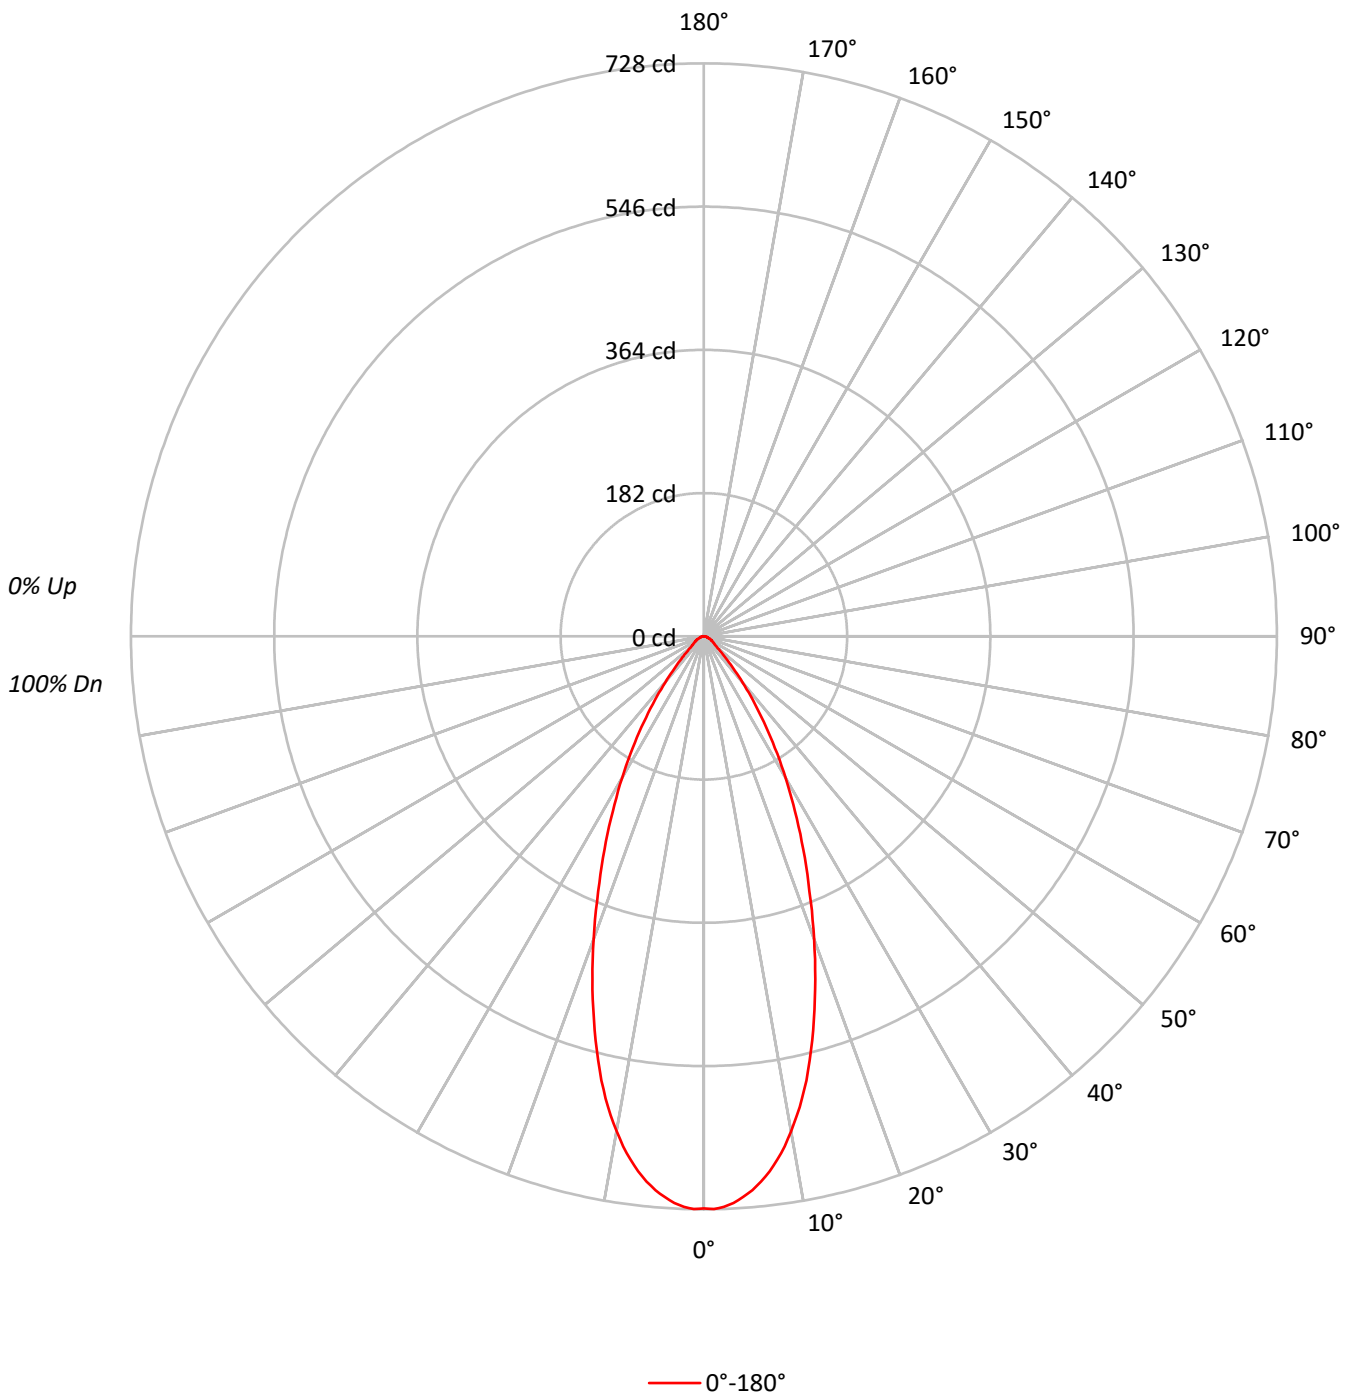





TEST NUMBER: P1296755

CATALOG NUMBER: P3AS13R35W2N902750DE010 E3DLP1LI\_3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	65.3	13.2
10°-20°	146.5	29.5
20°-30°	137.1	27.6
30°-40°	83.9	16.9
40°-50°	33.1	6.7
50°-60°	14.5	2.9
60°-70°	9.1	1.8
70°-80°	4.8	1.0
80°-90°	1.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	348.9	70.3
0°-40°	432.8	87.3
0°-60°	480.4	96.9
0°-90°	496.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	496.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	727	
5°	706	65
15°	532	147
25°	299	137
35°	133	84
45°	40	33
55°	16	15
65°	9	9
75°	5	5
85°	2	2
90°	0	



TEST NUMBER: P1296755  
CATALOG NUMBER: P3AS13R35W2N902750DE010 E3DLP1LI\_3000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	727.0
1°	727.8
2°	725.5
3°	720.9
4°	714.1
5°	706.4
6°	696.5
7°	685.0
8°	671.3
9°	656.0
10°	638.5
11°	620.1
12°	600.3
13°	578.9
14°	555.2
15°	531.5
17.5°	470.4
20°	409.3
22.5°	350.5
25°	298.6
27.5°	250.5
30°	207.7
32.5°	168.0
35°	132.9
37.5°	101.6
40°	76.4
42.5°	55.0
45°	40.5
47.5°	29.0
50°	22.1
52.5°	18.3
55°	16.0
57.5°	13.7
60°	12.2
62.5°	10.7
65°	9.2
67.5°	7.6
70°	6.1
72.5°	5.3
75°	4.6
77.5°	3.8
80°	3.1
82.5°	2.3
85°	1.5
87.5°	0.8



TEST NUMBER: P1296755  
CATALOG NUMBER: P3AS13R35W2N902750DE010 E3DLP1LI\_3000K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)