

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1296757

Luminaire Tested: P3AS13R35W2N902750DE010 E3DLP1LI\_4000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1296757  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R35W2N902750DE010 E3DLP1LI\_4000K  
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 4000K CCT AND, 90CRI ,  
E3DLP1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 503.0 lumens  
Efficiency: N/A  
Efficacy: 40.9 lumens/watt  
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1296757  
CATALOG NUMBER: P3AS13R35W2N902750DE010 E3DLP1LI\_4000K

### Luminous Intensity Polar Plot

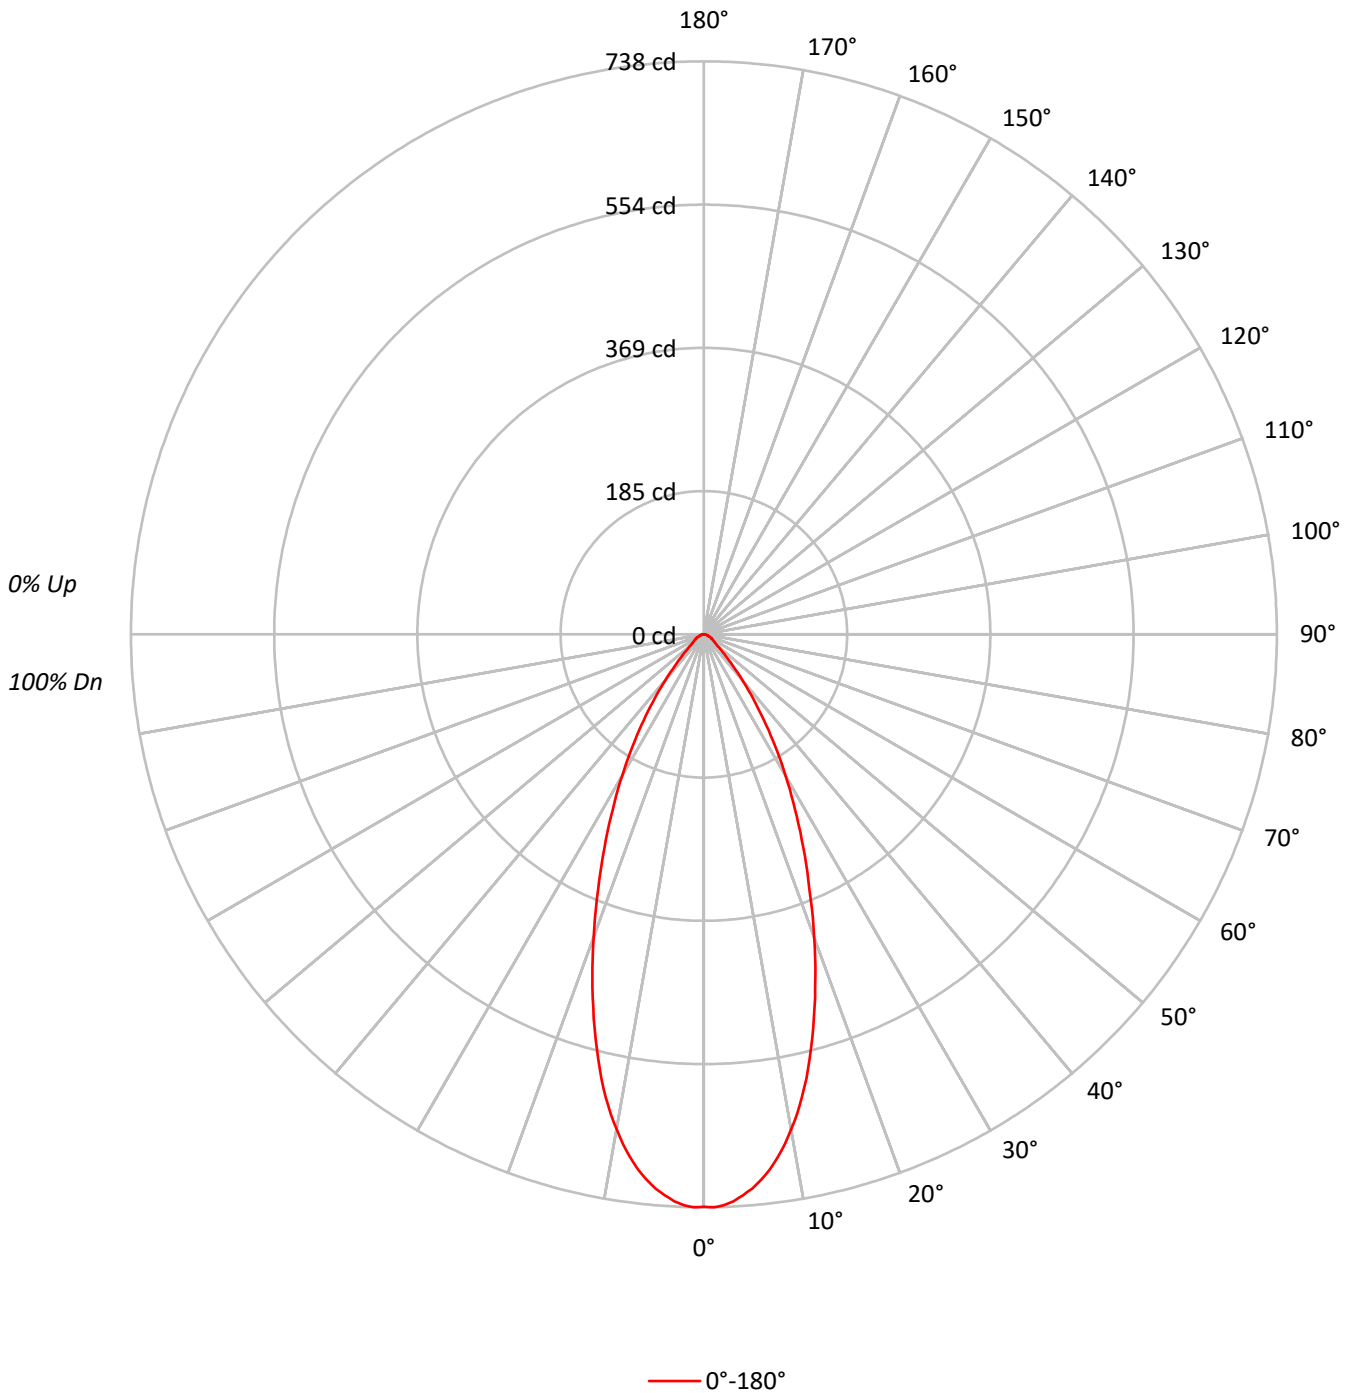





TEST NUMBER: P1296757

CATALOG NUMBER: P3AS13R35W2N902750DE010 E3DLP1LI\_4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	66.2	13.2
10°-20°	148.6	29.5
20°-30°	139.0	27.6
30°-40°	85.1	16.9
40°-50°	33.5	6.7
50°-60°	14.8	2.9
60°-70°	9.2	1.8
70°-80°	4.9	1.0
80°-90°	1.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	353.8	70.3
0°-40°	438.9	87.3
0°-60°	487.2	96.9
0°-90°	503.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	503.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	737	
5°	716	66
15°	539	149
25°	303	139
35°	135	85
45°	41	34
55°	16	15
65°	9	9
75°	5	5
85°	2	2
90°	0	



TEST NUMBER: P1296757  
CATALOG NUMBER: P3AS13R35W2N902750DE010 E3DLP1LI\_4000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	737.3
1°	738.1
2°	735.8
3°	731.1
4°	724.1
5°	716.4
6°	706.3
7°	694.7
8°	680.8
9°	665.3
10°	647.5
11°	628.9
12°	608.7
13°	587.1
14°	563.1
15°	539.0
17.5°	477.1
20°	415.1
22.5°	355.5
25°	302.8
27.5°	254.0
30°	210.7
32.5°	170.4
35°	134.8
37.5°	103.0
40°	77.4
42.5°	55.8
45°	41.0
47.5°	29.4
50°	22.5
52.5°	18.6
55°	16.3
57.5°	13.9
60°	12.4
62.5°	10.8
65°	9.3
67.5°	7.7
70°	6.2
72.5°	5.4
75°	4.6
77.5°	3.9
80°	3.1
82.5°	2.3
85°	1.5
87.5°	0.8



TEST NUMBER: P1296757  
CATALOG NUMBER: P3AS13R35W2N902750DE010 E3DLP1LI\_4000K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)