

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1296831

Luminaire Tested: P3AS13R35W2N902765DE010 E3DL1GPH\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1296831  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-19)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R35W2N902765DE010 E3DL1GPH\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 2700K CCT AND, 90CRI ,  
E3DL1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 357.0 lumens  
Efficiency: N/A  
Efficacy: 29.0 lumens/watt  
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.58  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1296831  
CATALOG NUMBER: P3AS13R35W2N902765DE010 E3DL1GPH\_2700K

### Luminous Intensity Polar Plot

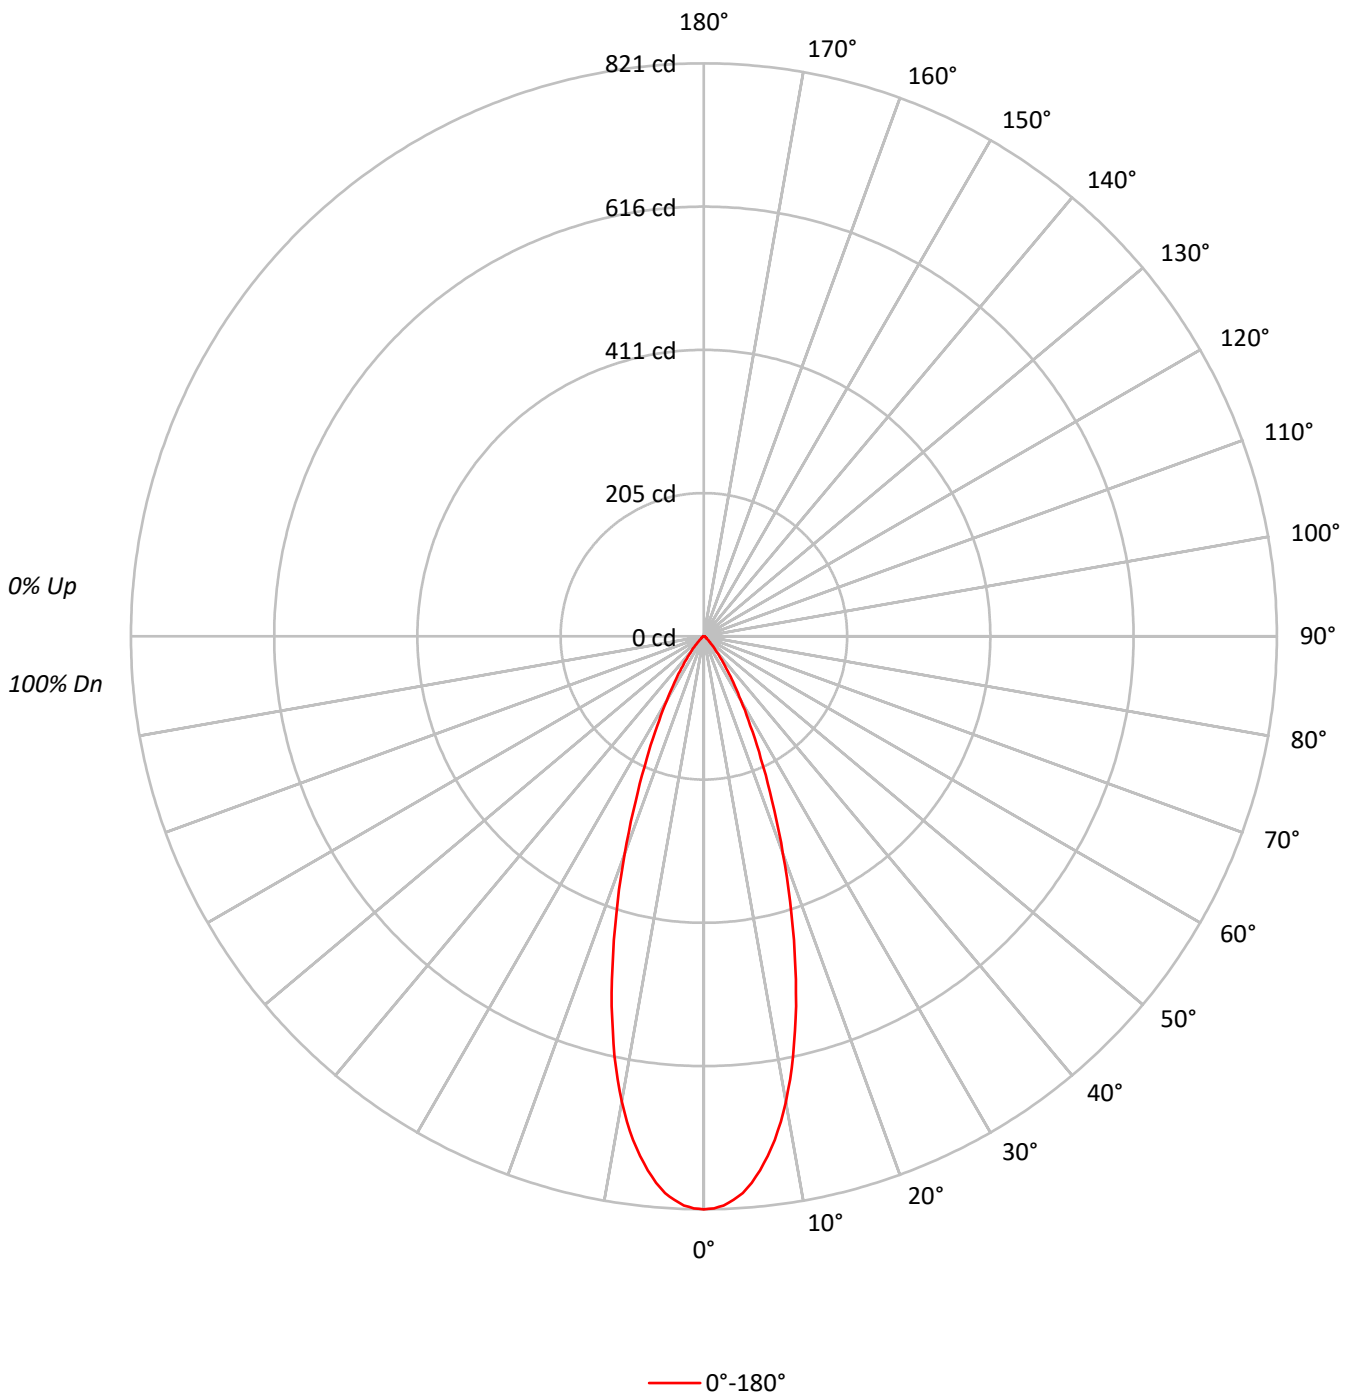



TEST NUMBER: P1296831  
 CATALOG NUMBER: P3AS13R35W2N902765DE010 E3DL1GPH\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	112	109	107	112	109	107	106	105	104	102		102	100	99		98	97	96	95
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94	93	91	90
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91	88	86	85
4	100	94	89	85	99	93	88	85	91	87	84		89	85	83		87	84	82	80
5	96	89	84	80	95	88	83	80	86	82	79		85	81	78		83	80	78	77
6	92	85	80	76	91	84	79	76	83	78	75		81	77	75		80	77	74	73
7	89	81	76	72	88	80	75	72	79	75	71		78	74	71		77	73	71	70
8	85	77	72	69	84	77	72	69	76	71	68		75	71	68		74	70	68	67
9	82	74	69	66	81	74	69	65	73	68	65		72	68	65		71	68	65	64
10	79	71	66	63	78	71	66	63	70	66	63		69	65	62		69	65	62	61

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	180051
5°	173035
10°	150765
15°	115483
20°	77263
25°	46745
30°	26840
35°	14991
40°	7958
45°	4093
50°	1979
55°	1567
60°	1491
65°	1245
70°	1282
75°	1186
80°	1263
85°	755

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 4093 cd/sqm



TEST NUMBER: P1296831

CATALOG NUMBER: P3AS13R35W2N902765DE010 E3DL1GPH\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	71.5	20.0
10°-20°	138.6	38.8
20°-30°	90.8	25.4
30°-40°	36.8	10.3
40°-50°	11.0	3.1
50°-60°	3.8	1.1
60°-70°	2.5	0.7
70°-80°	1.5	0.4
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	300.9	84.3
0°-40°	337.7	94.6
0°-60°	352.5	98.7
0°-90°	357.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	357.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	821	
5°	786	72
15°	509	139
25°	193	91
35°	56	37
45°	13	11
55°	4	4
65°	2	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1296831  
CATALOG NUMBER: P3AS13R35W2N902765DE010 E3DL1GPH\_2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	821.1
1°	819.8
2°	816.0
3°	808.6
4°	799.7
5°	786.1
6°	769.2
7°	750.1
8°	728.8
9°	704.3
10°	677.1
11°	646.9
12°	615.3
13°	580.0
14°	546.4
15°	508.7
17.5°	417.4
20°	331.1
22.5°	254.7
25°	193.2
27.5°	144.0
30°	106.0
32.5°	77.8
35°	56.0
37.5°	39.7
40°	27.8
42.5°	19.4
45°	13.2
47.5°	8.8
50°	5.8
52.5°	4.4
55°	4.1
57.5°	3.7
60°	3.4
62.5°	3.1
65°	2.4
67.5°	2.0
70°	2.0
72.5°	1.7
75°	1.4
77.5°	1.0
80°	1.0
82.5°	0.7
85°	0.3
87.5°	0.3



TEST NUMBER: P1296831  
CATALOG NUMBER: P3AS13R35W2N902765DE010 E3DL1GPH\_2700K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)