

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1296855

Luminaire Tested: P3AS13R35W2N902765DE010 E3DL1WH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1296855
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R35W2N902765DE010 E3DL1WH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 2700K CCT AND, 90CRI ,
E3DL1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 449.0 lumens
Efficiency: N/A
Efficacy: 36.5 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1296855
CATALOG NUMBER: P3AS13R35W2N902765DE010 E3DL1WH_2700K

Luminous Intensity Polar Plot

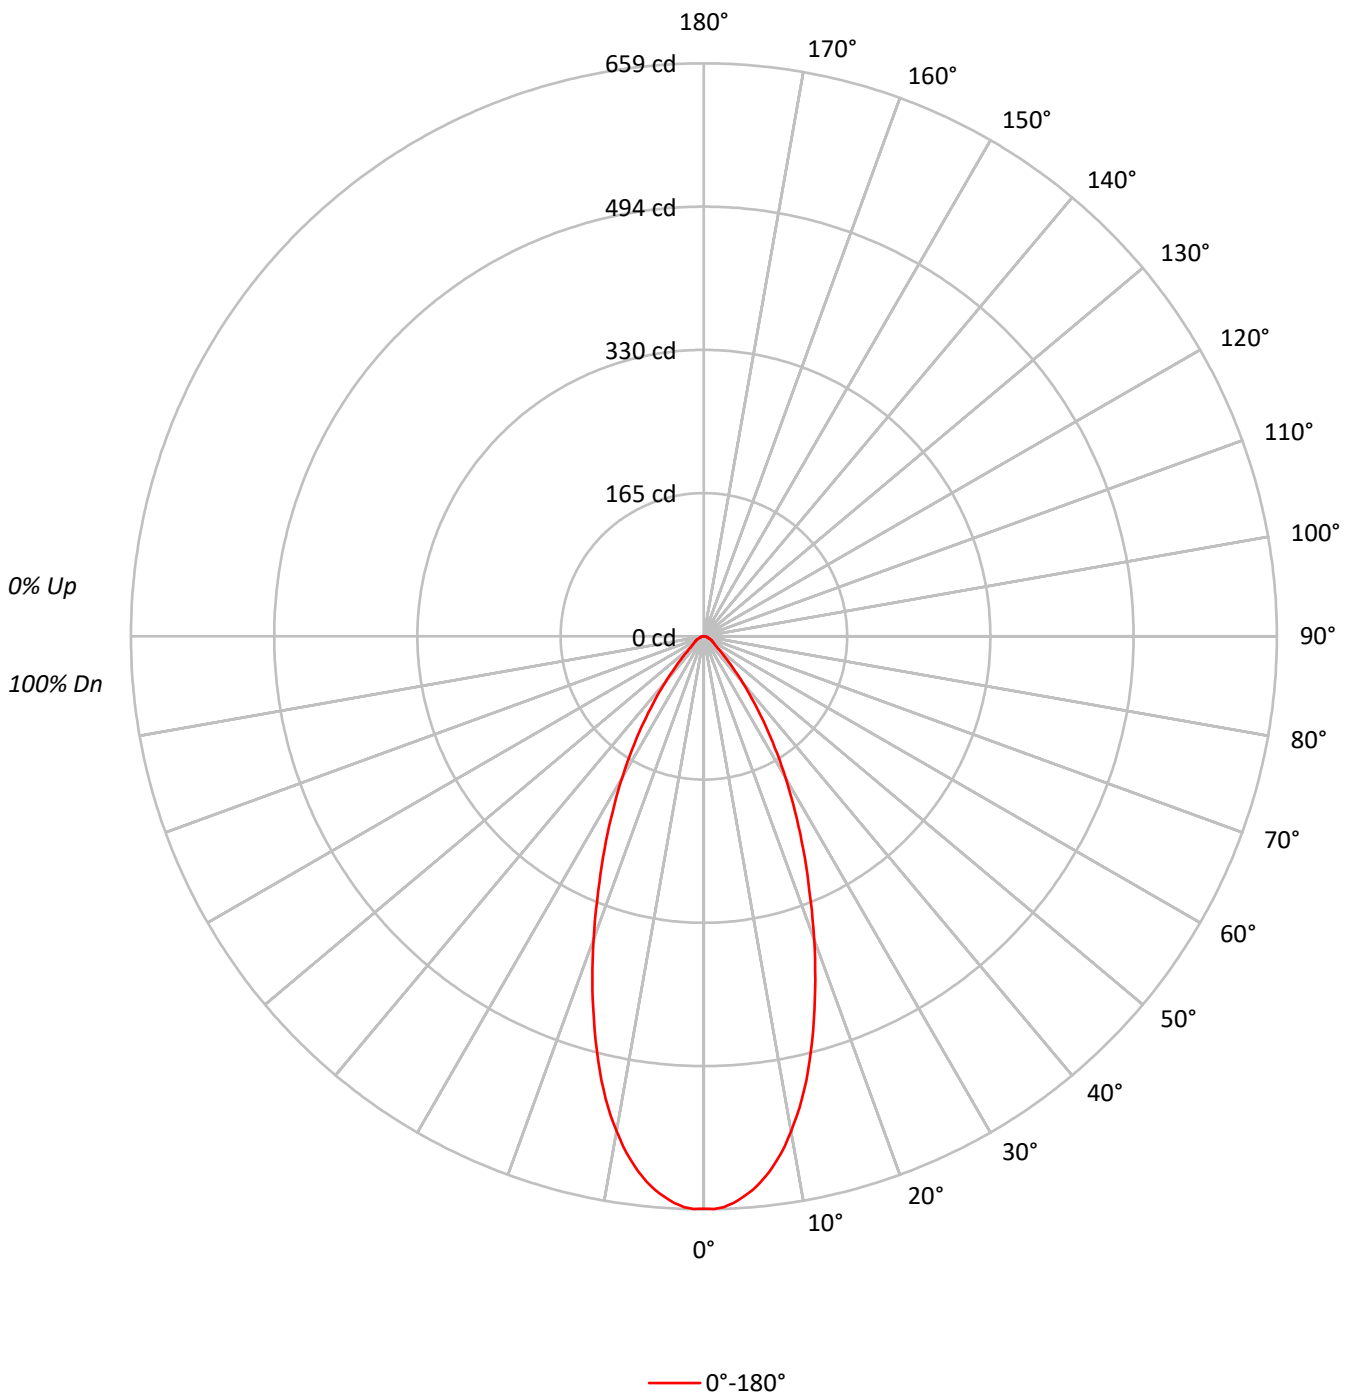



TEST NUMBER: P1296855

CATALOG NUMBER: P3AS13R35W2N902765DE010 E3DL1WH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93			
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86			
3	102	95	90	86	100	94	89	85	91	87	84	89	85	82	86	84	81	80			
4	97	89	83	79	95	88	82	78	86	81	77	84	80	77	82	78	76	74			
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69			
6	87	78	72	68	86	77	72	68	76	71	67	75	70	67	73	69	66	65			
7	83	74	68	63	82	73	67	63	72	67	63	71	66	63	69	65	62	61			
8	79	70	64	60	78	69	63	59	68	63	59	67	62	59	66	62	59	57			
9	76	66	60	56	75	66	60	56	65	59	56	64	59	56	63	59	56	54			
10	72	63	57	53	71	62	57	53	61	56	53	61	56	53	60	56	53	51			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	144331
5°	140766
10°	128699
15°	109240
20°	86481
25°	65399
30°	47602
35°	32203
40°	19780
45°	11350
50°	6823
55°	5543
60°	4868
65°	4307
70°	3526
75°	3474
80°	3536
85°	3522

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 11350 cd/sqm



TEST NUMBER: P1296855

CATALOG NUMBER: P3AS13R35W2N902765DE010 E3DL1WH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	59.1	13.2
10°-20°	132.7	29.5
20°-30°	124.1	27.6
30°-40°	75.9	16.9
40°-50°	29.9	6.7
50°-60°	13.2	2.9
60°-70°	8.2	1.8
70°-80°	4.4	1.0
80°-90°	1.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	315.9	70.3
0°-40°	391.8	87.3
0°-60°	434.9	96.9
0°-90°	449.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	449.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	658	
5°	640	59
15°	481	133
25°	270	124
35°	120	76
45°	37	30
55°	14	13
65°	8	8
75°	4	4
85°	1	2
90°	0	



TEST NUMBER: P1296855
CATALOG NUMBER: P3AS13R35W2N902765DE010 E3DL1WH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	658.2
1°	658.8
2°	656.8
3°	652.6
4°	646.4
5°	639.5
6°	630.5
7°	620.1
8°	607.7
9°	593.9
10°	578.0
11°	561.4
12°	543.4
13°	524.0
14°	502.6
15°	481.2
17.5°	425.9
20°	370.6
22.5°	317.3
25°	270.3
27.5°	226.8
30°	188.0
32.5°	152.1
35°	120.3
37.5°	91.9
40°	69.1
42.5°	49.8
45°	36.6
47.5°	26.3
50°	20.0
52.5°	16.6
55°	14.5
57.5°	12.4
60°	11.1
62.5°	9.7
65°	8.3
67.5°	6.9
70°	5.5
72.5°	4.8
75°	4.1
77.5°	3.5
80°	2.8
82.5°	2.1
85°	1.4
87.5°	0.7



TEST NUMBER: P1296855

CATALOG NUMBER: P3AS13R35W2N902765DE010 E3DL1WH_2700K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)