

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1297086

Luminaire Tested: P3AS13R40W2N902750DE010 E3DLP1LI\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1297086  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-21)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R40W2N902750DE010 E3DLP1LI\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 5000K CCT AND, 90CRI ,  
E3DLP1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 567.0 lumens  
Efficiency: N/A  
Efficacy: 46.1 lumens/watt  
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.74  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1297086  
CATALOG NUMBER: P3AS13R40W2N902750DE010 E3DLP1LI\_5000K

### Luminous Intensity Polar Plot

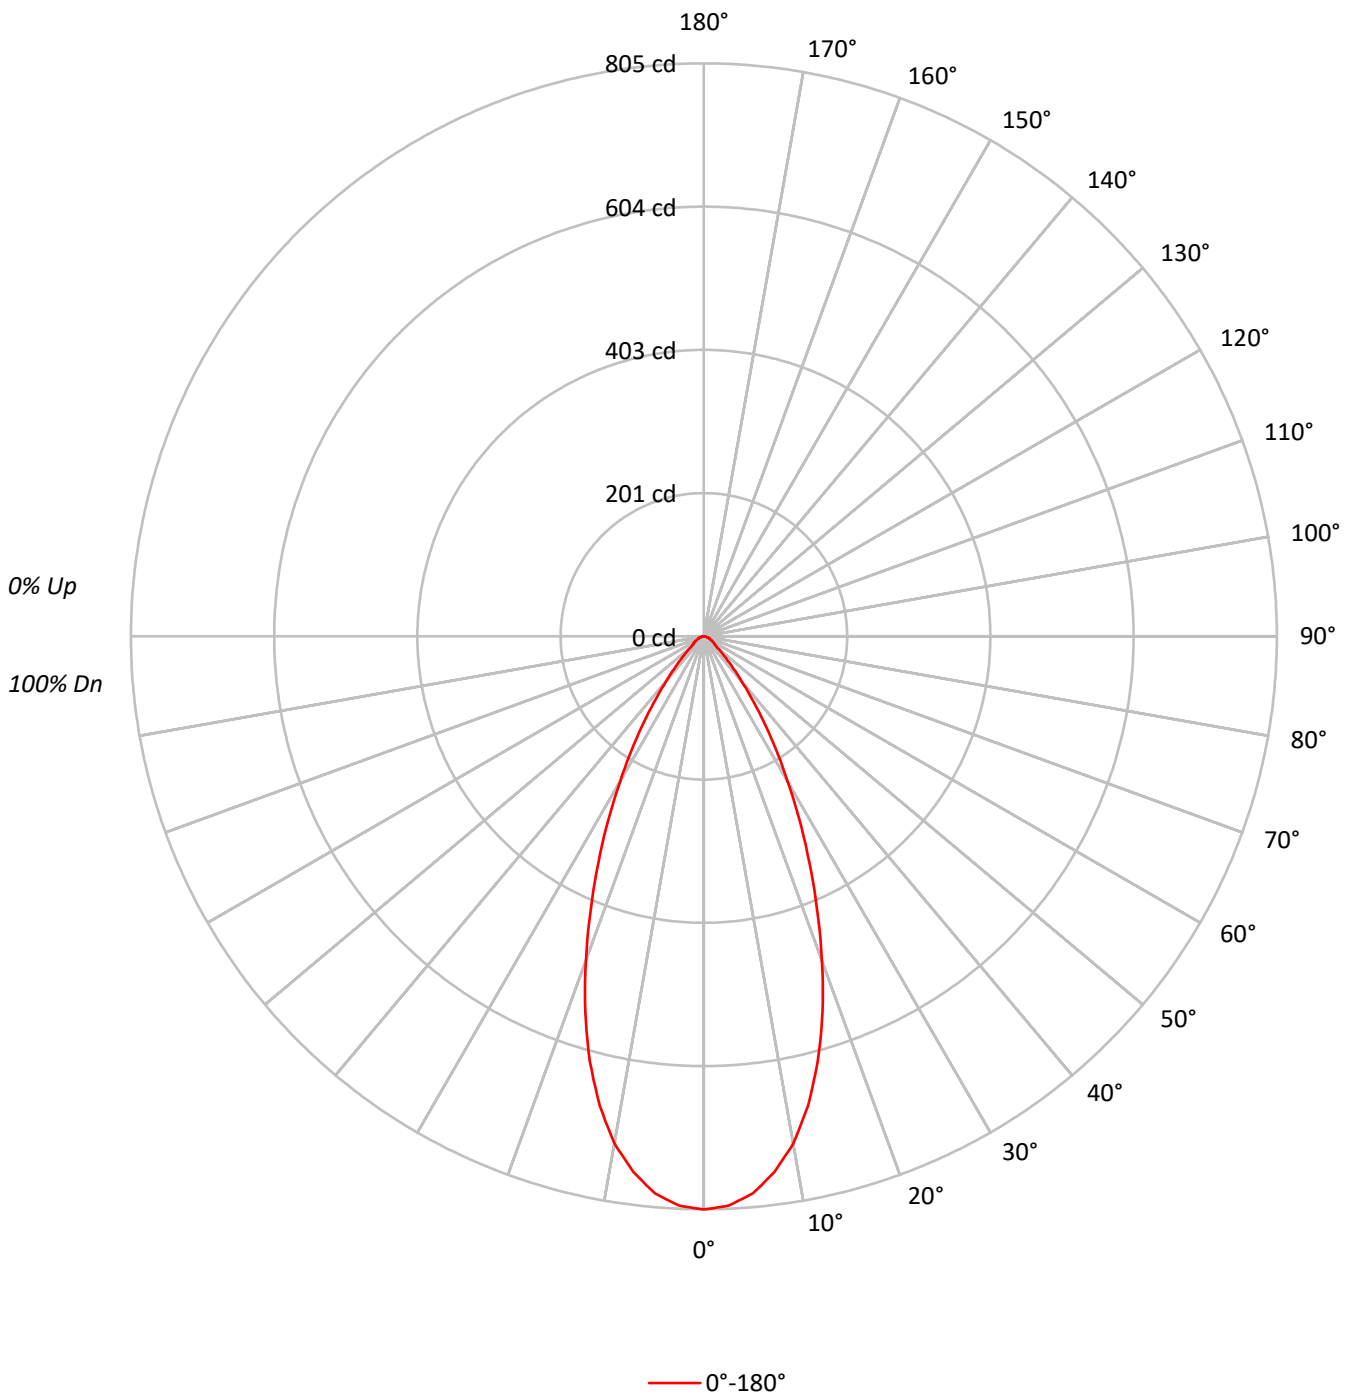



TEST NUMBER: P1297086

CATALOG NUMBER: P3AS13R40W2N902750DE010 E3DLP1LI\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	95	105	101	97	93	97	94	91	94	92	89	92	89	88	86	86	86	86
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	86	84	81	80	80	80	80
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74	74	74	74
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69	69	69	69
6	87	78	72	68	86	78	72	68	76	71	67	75	70	67	73	69	66	65	65	65	65
7	83	74	68	64	82	73	68	63	72	67	63	71	66	63	70	66	62	61	61	61	61
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58	58	58	58
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54	54	54	54
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	51	51	51	51

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	176543
5°	172969
10°	161052
15°	140364
20°	113130
25°	84803
30°	59604
35°	39056
40°	23644
45°	14110
50°	8426
55°	6805
60°	6096
65°	5189
70°	4937
75°	3897
80°	3915
85°	3774

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 14110 cd/sqm



TEST NUMBER: P1297086

CATALOG NUMBER: P3AS13R40W2N902750DE010 E3DLP1LI\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	73.0	12.9
10°-20°	170.3	30.0
20°-30°	160.5	28.3
30°-40°	92.8	16.4
40°-50°	37.0	6.5
50°-60°	16.4	2.9
60°-70°	10.1	1.8
70°-80°	5.3	0.9
80°-90°	1.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	403.8	71.2
0°-40°	496.6	87.6
0°-60°	549.9	97.0
0°-90°	567.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	567.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	805	
5°	786	73
15°	618	170
25°	350	160
35°	146	93
45°	46	37
55°	18	16
65°	10	10
75°	5	5
85°	2	2
90°	0	



TEST NUMBER: P1297086  
CATALOG NUMBER: P3AS13R40W2N902750DE010 E3DLP1LI\_5000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	805.1
2.5°	800.5
5°	785.8
7.5°	758.8
10°	723.3
12.5°	675.4
15°	618.3
17.5°	554.3
20°	484.8
22.5°	415.3
25°	350.5
27.5°	290.3
30°	235.4
32.5°	187.6
35°	145.9
37.5°	110.4
40°	82.6
42.5°	61.8
45°	45.5
47.5°	33.2
50°	24.7
52.5°	20.1
55°	17.8
57.5°	16.2
60°	13.9
62.5°	11.6
65°	10.0
67.5°	8.5
70°	7.7
72.5°	6.2
75°	4.6
77.5°	3.9
80°	3.1
82.5°	2.3
85°	1.5
87.5°	0.8
90°	0.0

(END OF REPORT)