

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1297159

Luminaire Tested: P3AS13R40W2N902765DE010 E3D1WH_4000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1297159
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R40W2N902765DE010 E3D1WH_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 4000K CCT AND, 90CRI ,
E3D1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1086.1 lumens
Efficiency: N/A
Efficacy: 88.3 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.6
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1297159
CATALOG NUMBER: P3AS13R40W2N902765DE010 E3D1WH_4000K

Luminous Intensity Polar Plot

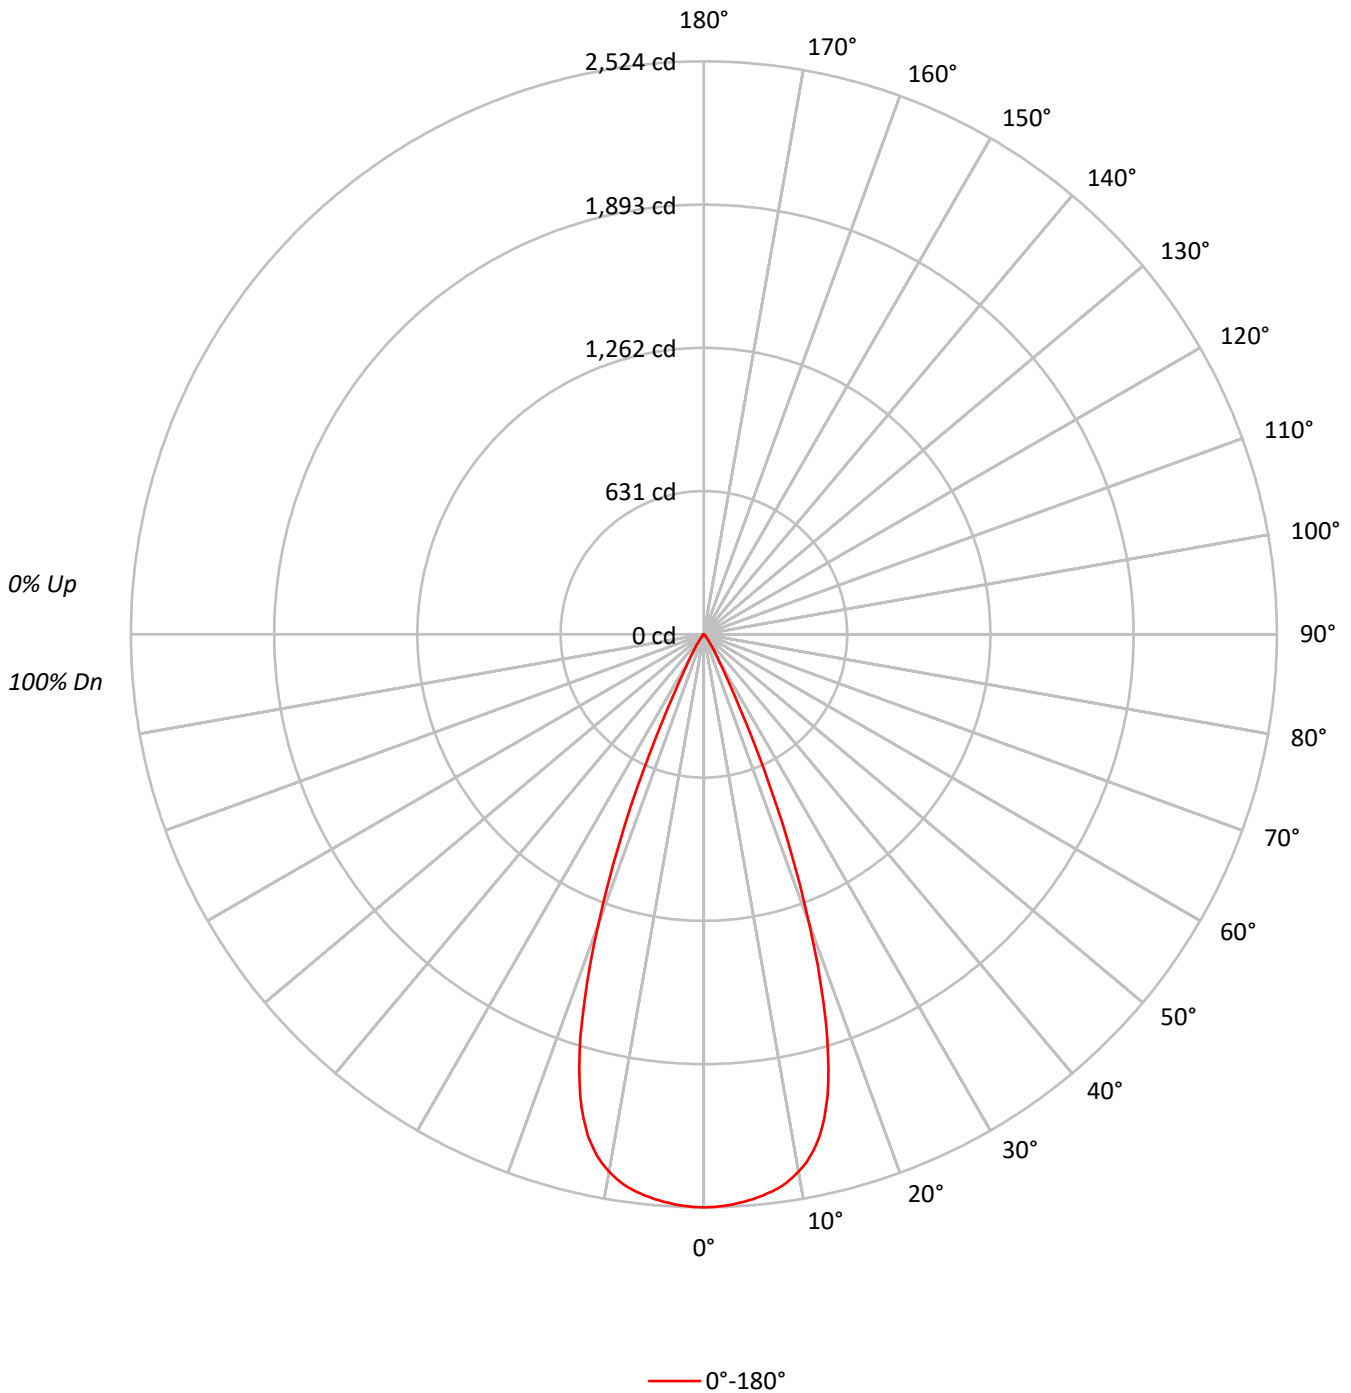



TEST NUMBER: P1297159

CATALOG NUMBER: P3AS13R40W2N902765DE010 E3D1WH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	235.6	21.7
10°-20°	558.0	51.4
20°-30°	253.0	23.3
30°-40°	32.8	3.0
40°-50°	5.7	0.5
50°-60°	0.7	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1046.6	96.4
0°-40°	1079.4	99.4
0°-60°	1085.8	100.0
0°-90°	1086.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1086.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2524	
5°	2497	236
15°	2106	558
25°	491	253
35°	46	33
45°	7	6
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1297159
CATALOG NUMBER: P3AS13R40W2N902765DE010 E3D1WH_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	2524.4
1°	2522.9
2°	2519.1
3°	2513.4
4°	2506.2
5°	2496.7
6°	2485.7
7°	2472.0
8°	2455.2
9°	2432.4
10°	2403.5
11°	2369.7
12°	2324.5
13°	2268.6
14°	2195.6
15°	2105.8
16°	1991.4
17°	1861.0
18°	1704.4
19°	1539.0
20°	1358.4
21°	1177.8
22°	999.9
23°	822.7
24°	648.6
25°	490.8
26°	363.5
27°	266.1
28°	200.0
29°	155.5
30°	125.5
31°	103.8
32°	86.7
32.5°	79.1
33°	71.5
34°	58.2
35°	46.4
36°	36.5
37°	28.9
37.5°	25.9
38°	22.8
39°	19.0
40°	15.6
42.5°	10.3
45°	6.8



TEST NUMBER: P1297159
CATALOG NUMBER: P3AS13R40W2N902765DE010 E3D1WH_4000K

CANDELA DISTRIBUTION (continued):

	0°
47.5°	4.2
50°	1.9
52.5°	0.8
55°	0.8
57.5°	0.4
60°	0.4
62.5°	0.4
65°	0.4
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)