

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1297242

Luminaire Tested: P3AS13R40W2N902765DE010 E3DLP1GPH_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1297242
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-21)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R40W2N902765DE010 E3DLP1GPH_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 3500K CCT AND, 90CRI ,
E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 279.0 lumens
Efficiency: N/A
Efficacy: 22.7 lumens/watt
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.74
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1297242
CATALOG NUMBER: P3AS13R40W2N902765DE010 E3DLP1GPH_3500K

Luminous Intensity Polar Plot

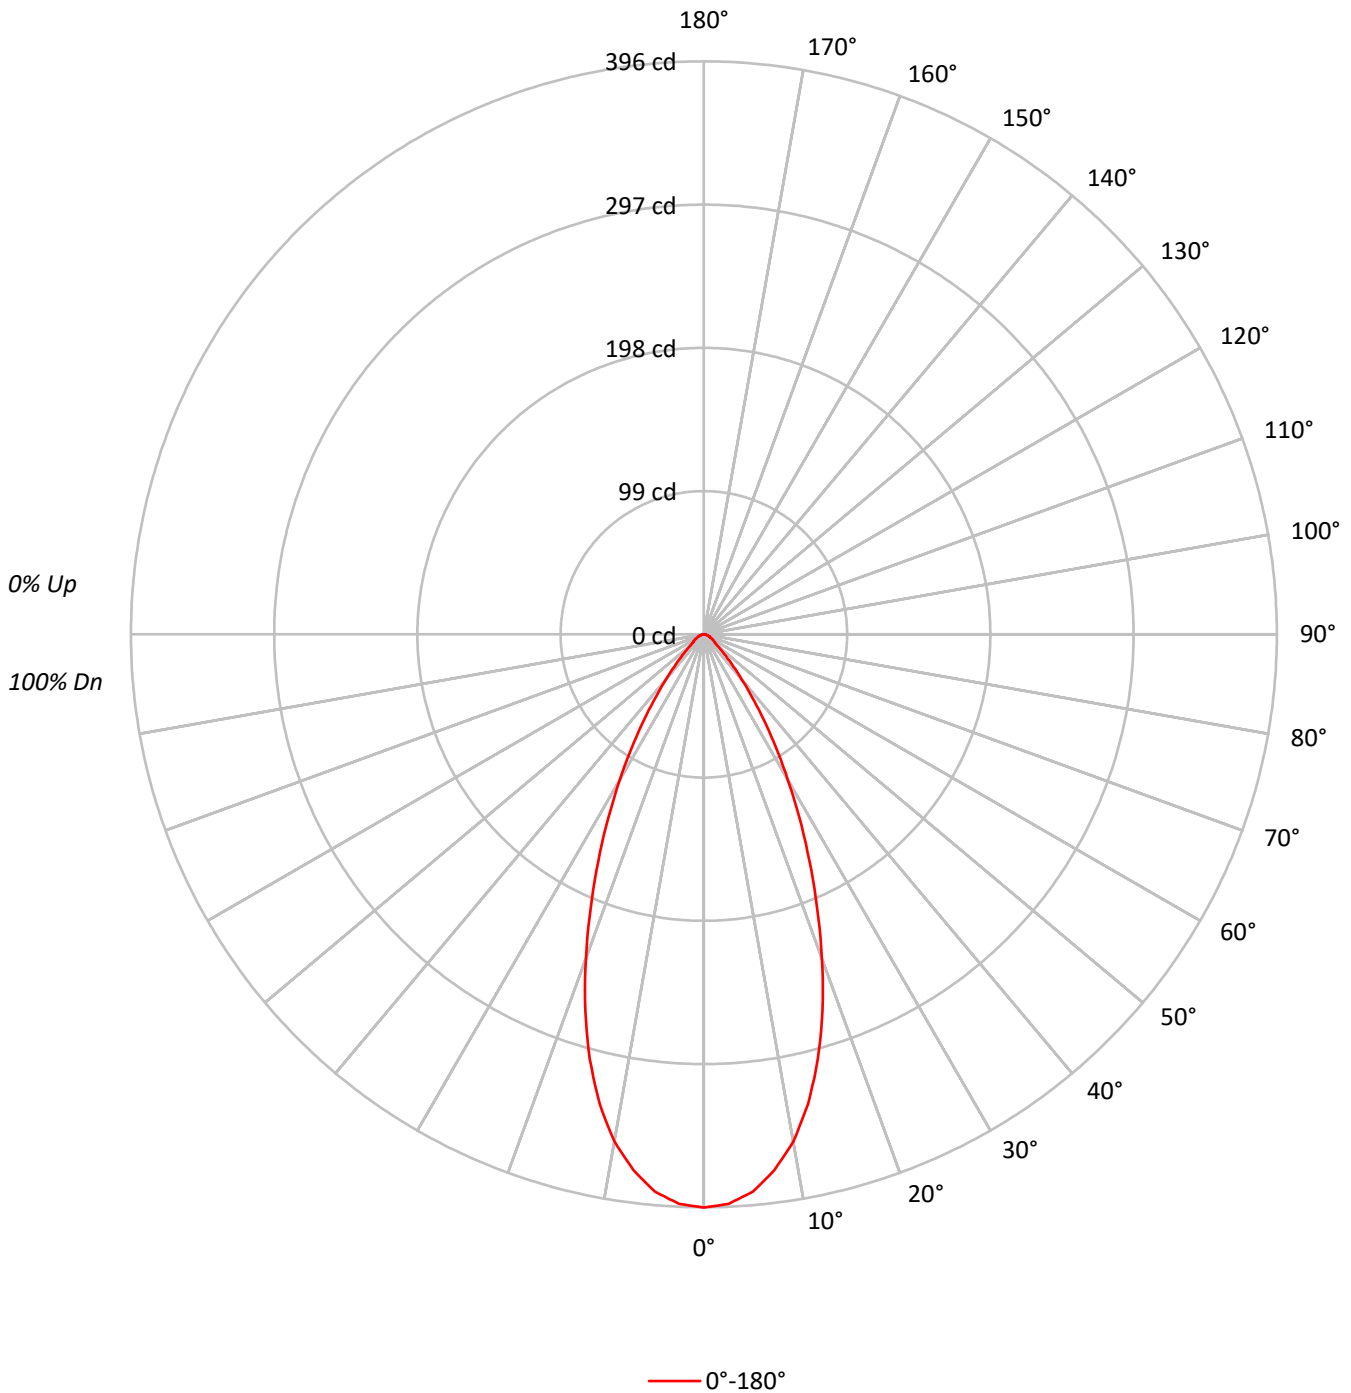



TEST NUMBER: P1297242
 CATALOG NUMBER: P3AS13R40W2N902765DE010 E3DLP1GPH_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	95	95	95	93
2	107	102	98	95	105	101	97	93	97	94	91	94	92	89	92	89	88	88	88	88	86
3	102	95	90	86	100	94	89	85	91	87	84	89	85	83	86	84	81	81	81	81	80
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	76	76	76	74
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	71	71	71	69
6	87	78	72	68	86	78	72	68	76	71	67	75	70	67	73	69	66	66	66	66	65
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	62	62	62	62	61
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	59	59	59	58
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	56	56	56	54
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	53	53	53	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	86879
5°	85120
10°	79246
15°	69081
20°	55655
25°	41712
30°	29346
35°	19220
40°	11622
45°	6946
50°	4162
55°	3326
60°	2982
65°	2542
70°	2436
75°	1949
80°	1894
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 6946 cd/sqm



TEST NUMBER: P1297242

CATALOG NUMBER: P3AS13R40W2N902765DE010 E3DLP1GPH_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	35.9	12.9
10°-20°	83.8	30.0
20°-30°	79.0	28.3
30°-40°	45.7	16.4
40°-50°	18.2	6.5
50°-60°	8.1	2.9
60°-70°	5.0	1.8
70°-80°	2.6	0.9
80°-90°	0.8	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	198.7	71.2
0°-40°	244.3	87.6
0°-60°	270.6	97.0
0°-90°	279.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	279.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	396	
5°	387	36
15°	304	84
25°	172	79
35°	72	46
45°	22	18
55°	9	8
65°	5	5
75°	2	3
85°	1	1
90°	0	



TEST NUMBER: P1297242
CATALOG NUMBER: P3AS13R40W2N902765DE010 E3DLP1GPH_3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	396.2
2.5°	393.9
5°	386.7
7.5°	373.4
10°	355.9
12.5°	332.4
15°	304.3
17.5°	272.7
20°	238.5
22.5°	204.4
25°	172.4
27.5°	142.8
30°	115.9
32.5°	92.3
35°	71.8
37.5°	54.3
40°	40.6
42.5°	30.4
45°	22.4
47.5°	16.3
50°	12.2
52.5°	9.9
55°	8.7
57.5°	8.0
60°	6.8
62.5°	5.7
65°	4.9
67.5°	4.2
70°	3.8
72.5°	3.0
75°	2.3
77.5°	1.9
80°	1.5
82.5°	1.1
85°	0.8
87.5°	0.4
90°	0.0

(END OF REPORT)