

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1297423

Luminaire Tested: P3AS13R45W2N902765DE010 E3CD1MB\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1297423  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-28)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R45W2N902765DE010 E3CD1MB\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R45 optic, 5000K CCT AND, 90CRI ,  
E3CD1MB TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1034.0 lumens  
Efficiency: N/A  
Efficacy: 84.1 lumens/watt  
Spacing Criteria (0/90/45): 0.72 / 0.72 / 0.66  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1297423  
CATALOG NUMBER: P3AS13R45W2N902765DE010 E3CD1MB\_5000K

### Luminous Intensity Polar Plot

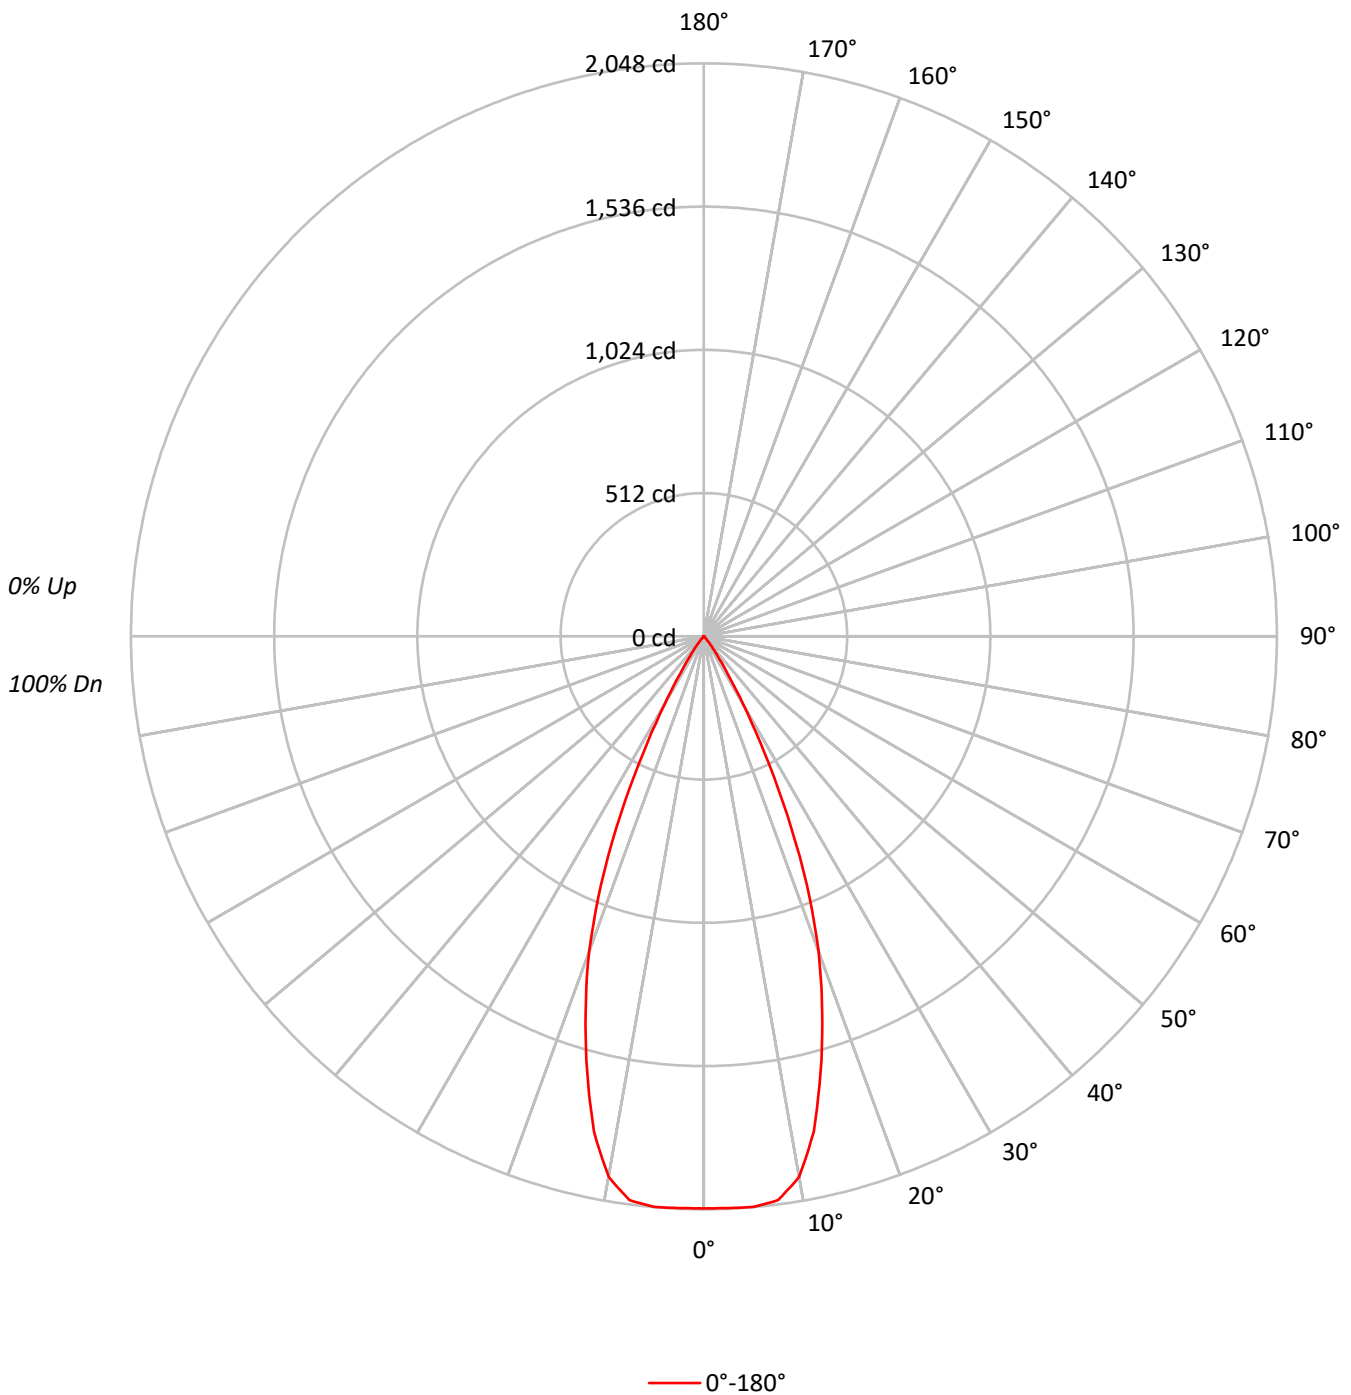



TEST NUMBER: P1297423

CATALOG NUMBER: P3AS13R45W2N902765DE010 E3CD1MB\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20					
RC	80				70				50				30				10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	0
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	97	97	97	97	95
2	110	106	102	100	108	104	101	98	101	98	96	98	96	94	95	94	92	92	92	92	92	91
3	106	100	96	93	104	99	95	92	96	93	91	94	91	89	92	90	88	88	88	88	88	87
4	102	95	91	87	100	94	90	87	92	89	86	90	87	85	88	86	84	84	84	84	84	82
5	98	91	86	82	96	90	85	82	88	84	81	87	83	81	85	82	80	80	80	80	80	79
6	94	87	82	78	93	86	81	78	85	80	77	83	80	77	82	79	76	76	76	76	76	75
7	90	83	78	74	89	82	78	74	81	77	74	80	76	74	79	76	73	73	73	73	73	72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	70	70	70	70	69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	67	73	70	67	67	67	67	67	66
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	71	67	65	65	65	65	65	64

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	448297
5°	450692
10°	436843
15°	366063
20°	279838
25°	170357
30°	70872
35°	22700
40°	7070
45°	1427
50°	1058
55°	1185
60°	1009
65°	1193
70°	962
75°	1271
80°	1010
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1427 cd/sqm



TEST NUMBER: P1297423

CATALOG NUMBER: P3AS13R45W2N902765DE010 E3CD1MB\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	193.1	18.7
10°-20°	443.2	42.9
20°-30°	319.1	30.9
30°-40°	66.4	6.4
40°-50°	6.1	0.6
50°-60°	2.5	0.2
60°-70°	2.0	0.2
70°-80°	1.3	0.1
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	955.4	92.4
0°-40°	1021.8	98.8
0°-60°	1030.3	99.7
0°-90°	1034.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1034.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2044	
5°	2048	193
15°	1612	443
25°	704	319
35°	85	66
45°	5	6
55°	3	3
65°	2	2
75°	2	1
85°	0	0
90°	0	



TEST NUMBER: P1297423

CATALOG NUMBER: P3AS13R45W2N902765DE010 E3CD1MB\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2044.4
2.5°	2045.2
5°	2047.5
7.5°	2032.8
10°	1961.9
12.5°	1813.8
15°	1612.5
17.5°	1406.6
20°	1199.2
22.5°	960.9
25°	704.1
27.5°	464.2
30°	279.9
32.5°	156.5
35°	84.8
37.5°	47.8
40°	24.7
42.5°	10.8
45°	4.6
47.5°	3.1
50°	3.1
52.5°	3.1
55°	3.1
57.5°	2.3
60°	2.3
62.5°	2.3
65°	2.3
67.5°	1.5
70°	1.5
72.5°	1.5
75°	1.5
77.5°	0.8
80°	0.8
82.5°	0.8
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)