

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1297467

Luminaire Tested: P3AS13R45W2N902765DE010 E3DL1WH\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1297467  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-25)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R45W2N902765DE010 E3DL1WH\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R45 optic, 2700K CCT AND, 90CRI ,  
E3DL1WH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 500.0 lumens  
Efficiency: N/A  
Efficacy: 40.7 lumens/watt  
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.76  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1297467  
CATALOG NUMBER: P3AS13R45W2N902765DE010 E3DL1WH\_2700K

### Luminous Intensity Polar Plot

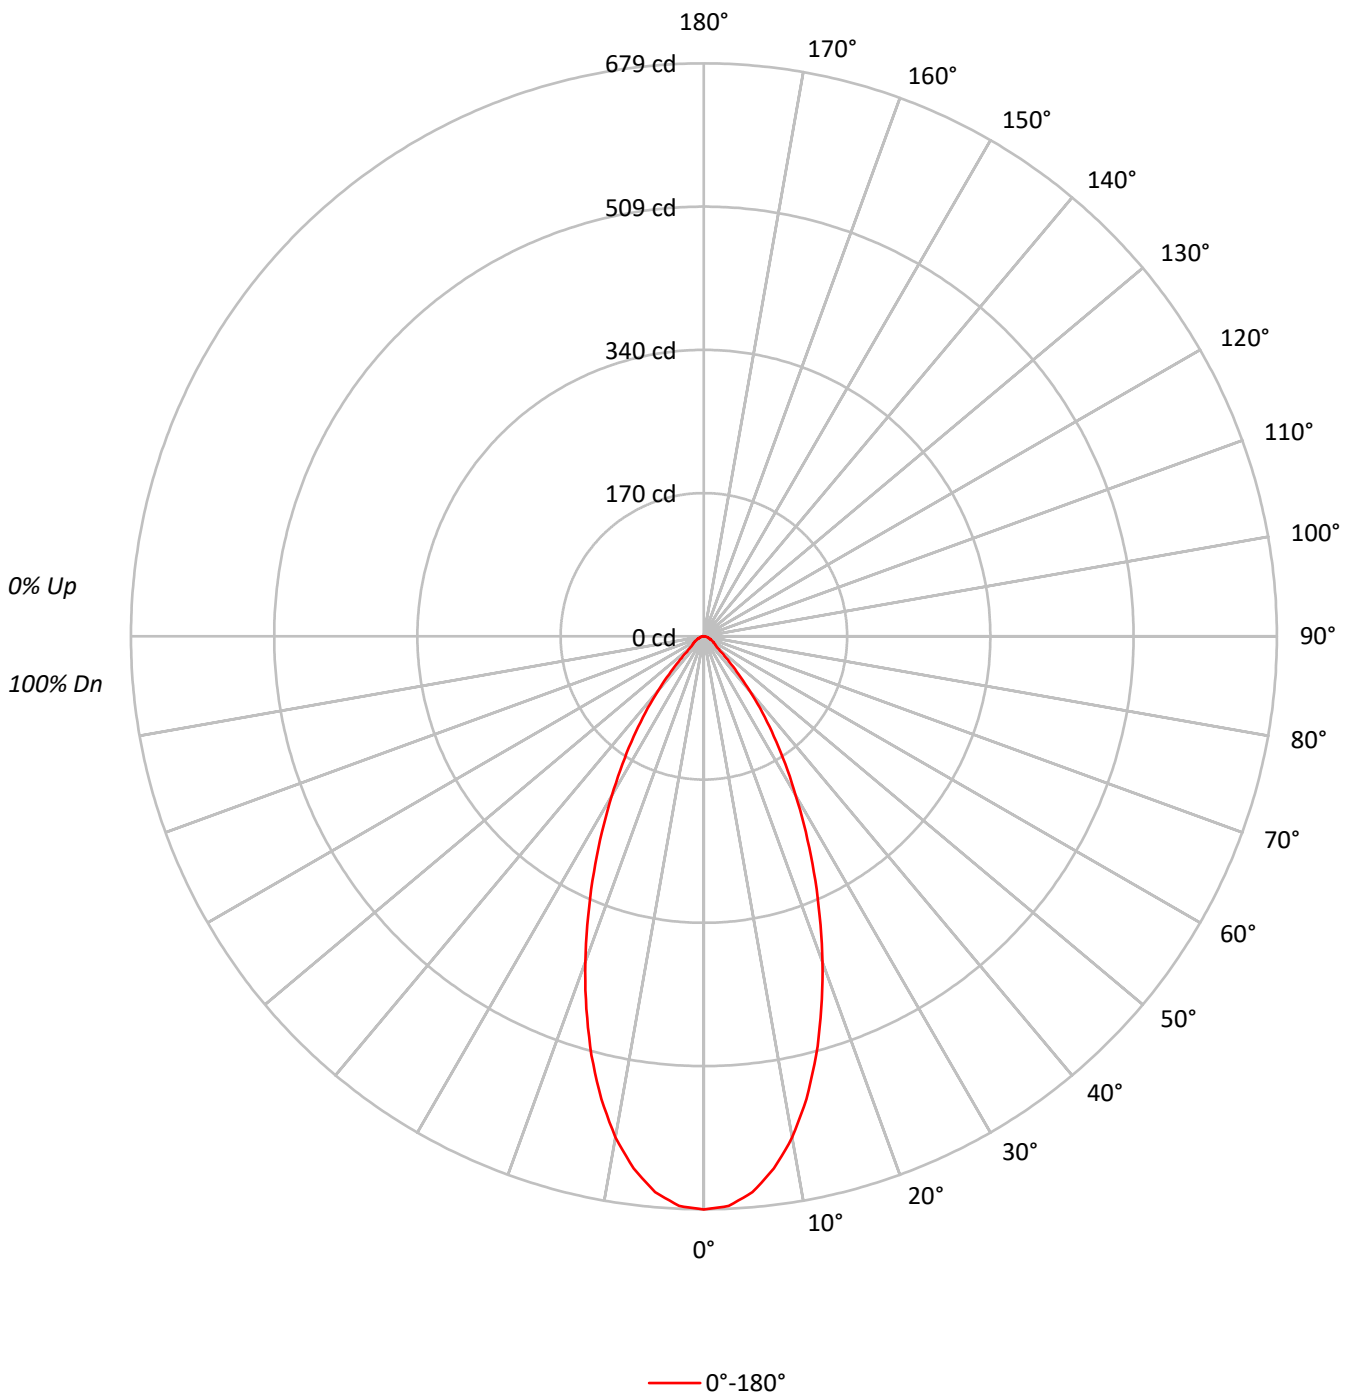



TEST NUMBER: P1297467

CATALOG NUMBER: P3AS13R45W2N902765DE010 E3DL1WH\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93			
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	86			
3	102	95	90	85	100	93	89	85	91	87	83	88	85	82	86	83	81	79			
4	96	88	83	78	94	87	82	78	85	81	77	83	79	76	81	78	75	74			
5	91	83	77	72	90	82	76	72	80	75	71	78	74	71	77	73	70	69			
6	87	78	72	67	85	77	71	67	75	70	66	74	69	66	73	69	66	64			
7	83	73	67	63	81	72	67	62	71	66	62	70	65	62	69	65	61	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	56			
9	75	65	59	55	74	65	59	55	64	59	55	63	58	55	62	58	55	53			
10	72	62	56	52	71	61	56	52	61	55	52	60	55	52	59	55	52	50			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	148935
5°	145542
10°	134244
15°	116732
20°	95908
25°	74617
30°	55097
35°	38762
40°	24217
45°	13118
50°	7096
55°	6079
60°	5482
65°	4670
70°	3975
75°	4151
80°	3536
85°	3522

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 13118 cd/sqm



TEST NUMBER: P1297467

CATALOG NUMBER: P3AS13R45W2N902765DE010 E3DL1WH\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	61.2	12.2
10°-20°	142.2	28.4
20°-30°	141.1	28.2
30°-40°	90.9	18.2
40°-50°	35.0	7.0
50°-60°	14.2	2.8
60°-70°	9.0	1.8
70°-80°	4.9	1.0
80°-90°	1.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	344.5	68.9
0°-40°	435.4	87.1
0°-60°	484.7	96.9
0°-90°	500.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	500.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	679	
5°	661	61
15°	514	142
25°	308	141
35°	145	91
45°	42	35
55°	16	14
65°	9	9
75°	5	5
85°	1	2
90°	0	



TEST NUMBER: P1297467

CATALOG NUMBER: P3AS13R45W2N902765DE010 E3DL1WH\_2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	679.2
2.5°	675.7
5°	661.2
7.5°	636.2
10°	602.9
12.5°	561.4
15°	514.2
17.5°	462.9
20°	411.0
22.5°	358.3
25°	308.4
27.5°	261.3
30°	217.6
32.5°	179.5
35°	144.8
37.5°	113.7
40°	84.6
42.5°	61.0
45°	42.3
47.5°	28.4
50°	20.8
52.5°	17.3
55°	15.9
57.5°	13.9
60°	12.5
62.5°	10.4
65°	9.0
67.5°	7.6
70°	6.2
72.5°	5.5
75°	4.9
77.5°	3.5
80°	2.8
82.5°	2.1
85°	1.4
87.5°	0.7
90°	0.0

(END OF REPORT)