

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1297532

Luminaire Tested: P3AS13R45W2N902765DE010 E3DLP1LI\_6500K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1297532  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-25)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R45W2N902765DE010 E3DLP1LI\_6500K  
Description: 3in Adjustable Tunable White LED luminaire with, R45 optic, 6500K CCT AND, 90CRI ,  
E3DLP1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 556.0 lumens  
Efficiency: N/A  
Efficacy: 45.2 lumens/watt  
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.76  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1297532  
CATALOG NUMBER: P3AS13R45W2N902765DE010 E3DLP1LI\_6500K

### Luminous Intensity Polar Plot

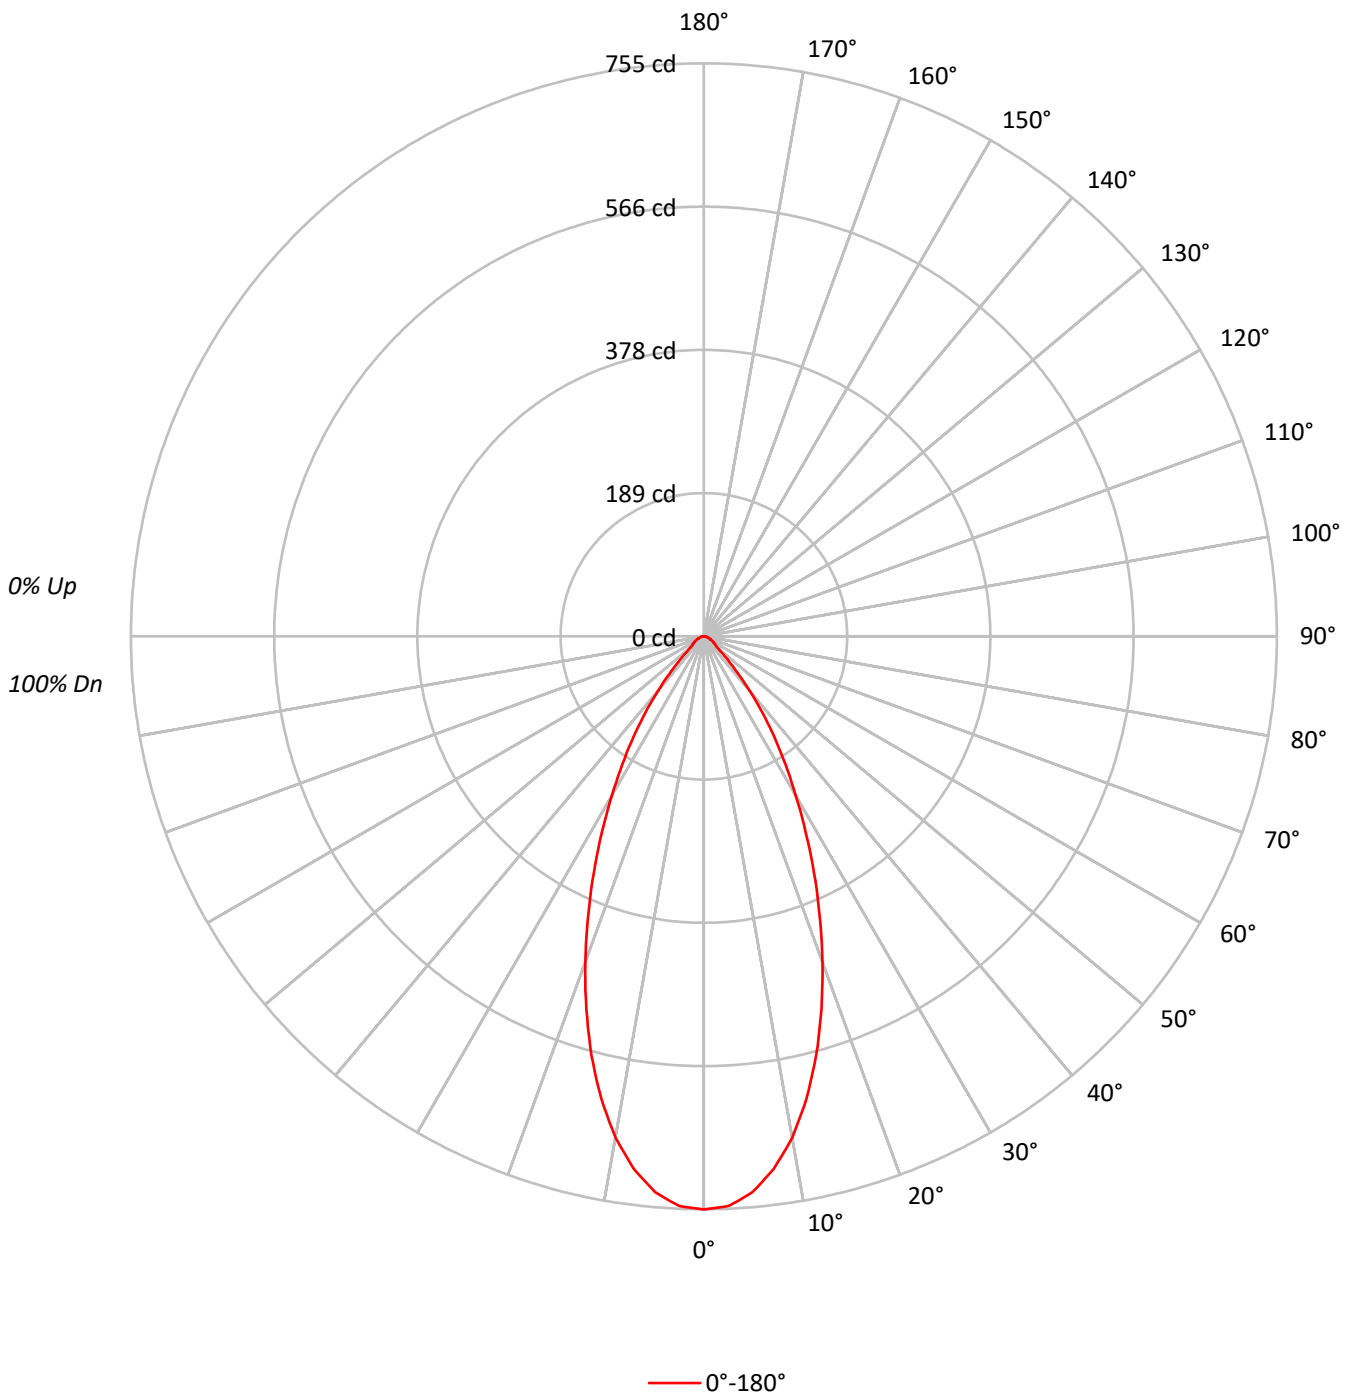





TEST NUMBER: P1297532

CATALOG NUMBER: P3AS13R45W2N902765DE010 E3DLP1LI\_6500K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 68.1   | 12.2      |
| 10°-20°   | 158.1  | 28.4      |
| 20°-30°   | 156.9  | 28.2      |
| 30°-40°   | 101.1  | 18.2      |
| 40°-50°   | 38.9   | 7.0       |
| 50°-60°   | 15.8   | 2.8       |
| 60°-70°   | 10.0   | 1.8       |
| 70°-80°   | 5.4    | 1.0       |
| 80°-90°   | 1.7    | 0.3       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 383.1  | 68.9      |
| 0°-40°    | 484.2  | 87.1      |
| 0°-60°    | 538.9  | 96.9      |
| 0°-90°    | 556.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 556.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 755 |      |
| 5°  | 735 | 68   |
| 15° | 572 | 158  |
| 25° | 343 | 157  |
| 35° | 161 | 101  |
| 45° | 47  | 39   |
| 55° | 18  | 16   |
| 65° | 10  | 10   |
| 75° | 5   | 5    |
| 85° | 2   | 2    |
| 90° | 0   |      |



TEST NUMBER: P1297532  
CATALOG NUMBER: P3AS13R45W2N902765DE010 E3DLP1LI\_6500K

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 755.2 |
| 2.5°  | 751.4 |
| 5°    | 735.2 |
| 7.5°  | 707.5 |
| 10°   | 670.5 |
| 12.5° | 624.2 |
| 15°   | 571.8 |
| 17.5° | 514.8 |
| 20°   | 457.0 |
| 22.5° | 398.4 |
| 25°   | 342.9 |
| 27.5° | 290.5 |
| 30°   | 242.0 |
| 32.5° | 199.6 |
| 35°   | 161.1 |
| 37.5° | 126.4 |
| 40°   | 94.0  |
| 42.5° | 67.8  |
| 45°   | 47.0  |
| 47.5° | 31.6  |
| 50°   | 23.1  |
| 52.5° | 19.3  |
| 55°   | 17.7  |
| 57.5° | 15.4  |
| 60°   | 13.9  |
| 62.5° | 11.6  |
| 65°   | 10.0  |
| 67.5° | 8.5   |
| 70°   | 6.9   |
| 72.5° | 6.2   |
| 75°   | 5.4   |
| 77.5° | 3.9   |
| 80°   | 3.1   |
| 82.5° | 2.3   |
| 85°   | 1.5   |
| 87.5° | 0.8   |
| 90°   | 0.0   |

(END OF REPORT)