

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1297604

Luminaire Tested: P3AS13R50W2N902750DE010 E3D1WMH_4000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1297604
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-13)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R50W2N902750DE010 E3D1WMH_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 4000K CCT AND, 90CRI ,
E3D1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1078.0 lumens
Efficiency: N/A
Efficacy: 87.6 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.77
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1297604
CATALOG NUMBER: P3AS13R50W2N902750DE010 E3D1WMH_4000K

Luminous Intensity Polar Plot

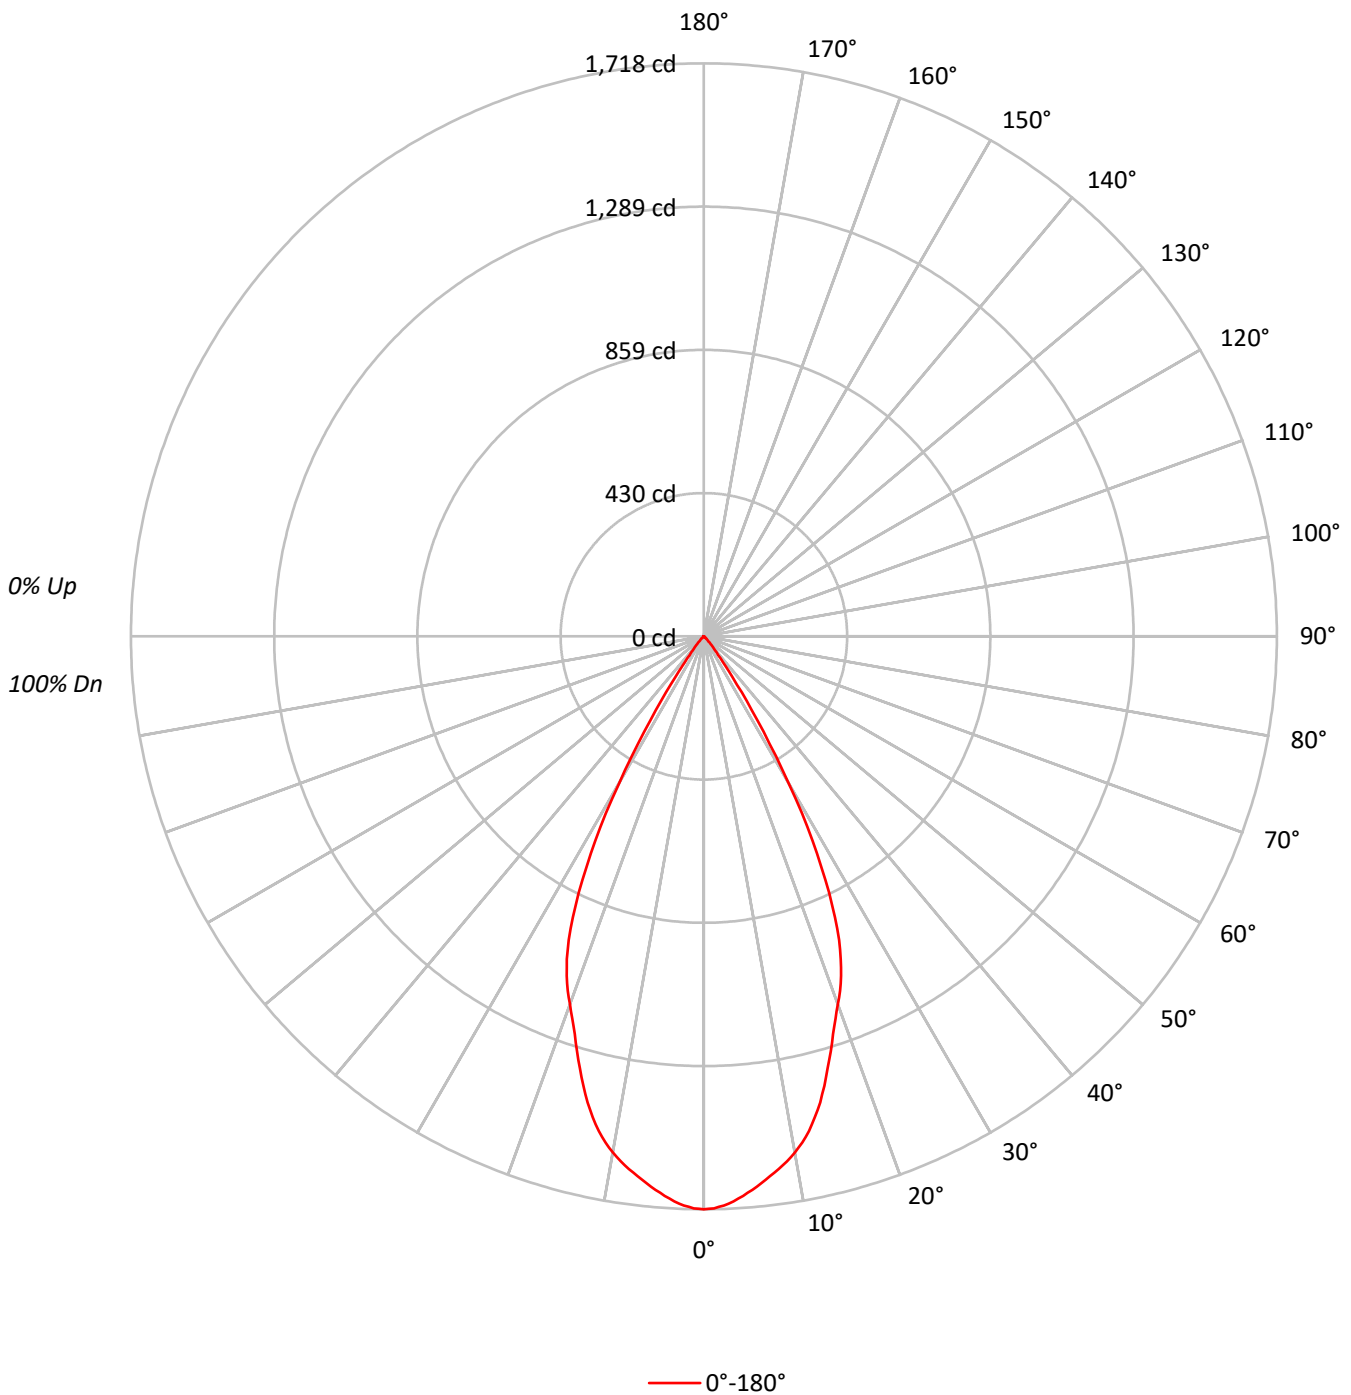



TEST NUMBER: P1297604

CATALOG NUMBER: P3AS13R50W2N902750DE010 E3D1WMH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	109	107	112	110	108	106	105	104	102	102	101	99	98	97	97	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	90
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85
4	100	94	89	85	99	92	88	85	90	87	84	88	85	83	87	84	82	80
5	96	89	84	80	94	88	83	79	86	82	79	84	81	78	83	80	77	76
6	92	84	79	75	91	83	78	75	82	78	74	81	77	74	79	76	73	72
7	88	80	75	71	87	79	74	71	78	74	70	77	73	70	76	72	70	68
8	84	76	71	67	83	76	71	67	75	70	67	74	69	66	73	69	66	65
9	81	73	67	64	80	72	67	64	71	67	63	70	66	63	70	66	63	62
10	78	69	64	61	77	69	64	61	68	64	60	67	63	60	67	63	60	59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	376724
5°	366695
10°	349916
15°	316778
20°	274074
25°	224819
30°	129134
35°	40127
40°	10792
45°	3783
50°	921
55°	306
60°	175
65°	208
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3783 cd/sqm



TEST NUMBER: P1297604

CATALOG NUMBER: P3AS13R50W2N902750DE010 E3D1WMH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	156.0	14.5
10°-20°	386.6	35.9
20°-30°	406.4	37.7
30°-40°	116.3	10.8
40°-50°	11.4	1.1
50°-60°	0.9	0.1
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	949.1	88.0
0°-40°	1065.4	98.8
0°-60°	1077.7	100.0
0°-90°	1078.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1078.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1718	
5°	1666	156
15°	1395	387
25°	929	406
35°	150	116
45°	12	11
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1297604

CATALOG NUMBER: P3AS13R50W2N902750DE010 E3D1WMH_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1718.0
1°	1715.3
2°	1707.7
3°	1696.7
4°	1681.8
5°	1665.9
6°	1648.8
7°	1630.5
8°	1613.4
9°	1593.6
10°	1571.5
11°	1546.1
12°	1516.8
13°	1480.3
14°	1440.7
15°	1395.4
16°	1347.5
17°	1301.1
18°	1253.6
19°	1211.7
20°	1174.5
21°	1138.7
22°	1098.0
23°	1051.2
24°	996.5
25°	929.2
26°	856.1
27°	774.7
28°	693.7
29°	606.3
30°	510.0
31°	419.9
32°	337.0
32.5°	300.8
33°	264.3
34°	202.7
35°	149.9
36°	109.9
37°	81.8
37.5°	70.7
38°	61.2
39°	47.5
40°	37.7
42.5°	21.3
45°	12.2



TEST NUMBER: P1297604
CATALOG NUMBER: P3AS13R50W2N902750DE010 E3D1WMH_4000K

CANDELA DISTRIBUTION (continued):

	0°
47.5°	6.8
50°	2.7
52.5°	1.1
55°	0.8
57.5°	0.8
60°	0.4
62.5°	0.4
65°	0.4
67.5°	0.4
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)