

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1297835

Luminaire Tested: P3AS13R50W2N902765DE010 E3DLP1GPH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1297835
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-29)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R50W2N902765DE010 E3DLP1GPH_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 3000K CCT AND, 90CRI ,
E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 277.0 lumens
Efficiency: N/A
Efficacy: 22.5 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.77
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1297835
CATALOG NUMBER: P3AS13R50W2N902765DE010 E3DLP1GPH_3000K

Luminous Intensity Polar Plot

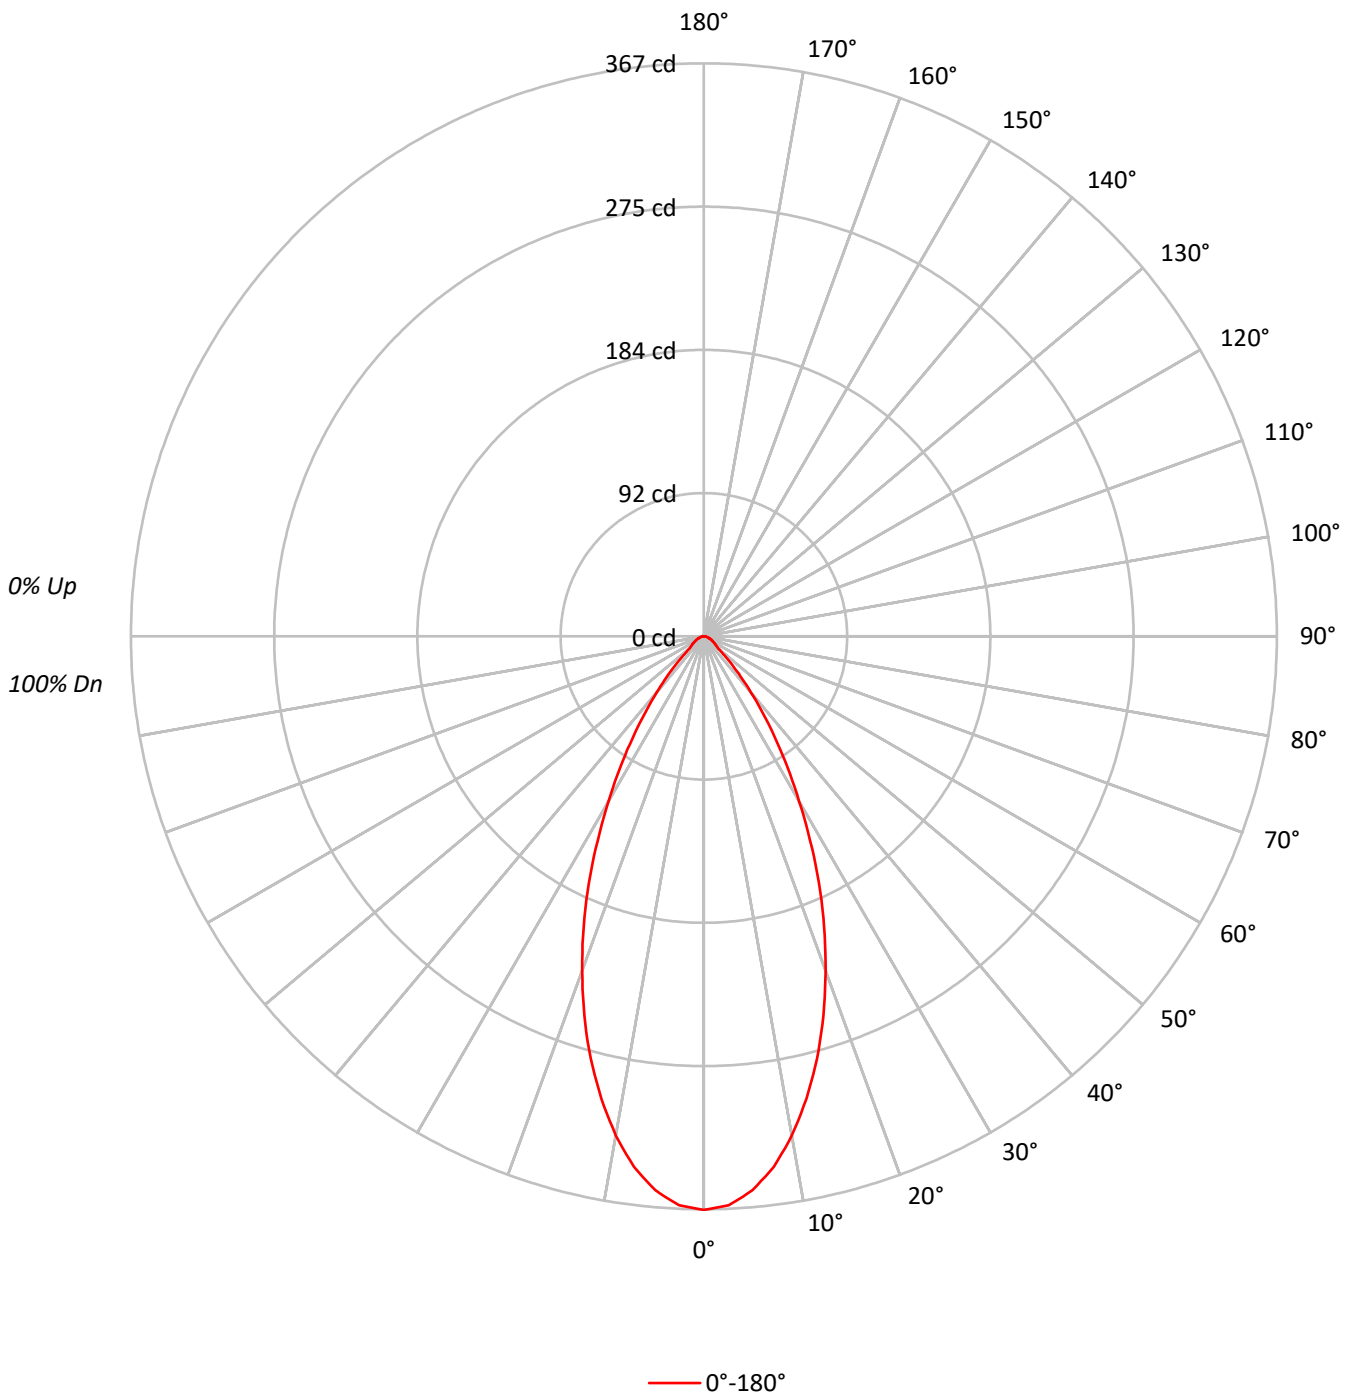



TEST NUMBER: P1297835
 CATALOG NUMBER: P3AS13R50W2N902765DE010 E3DLP1GPH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93			93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85			85
3	101	95	89	85	99	93	88	85	91	87	83	88	85	82	86	83	81	79			79
4	96	88	82	78	94	87	82	78	85	80	77	83	79	76	81	78	75	73			73
5	91	83	76	72	90	82	76	72	80	75	71	78	74	70	77	73	70	68			68
6	87	77	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64			64
7	82	73	67	62	81	72	66	62	71	66	62	70	65	61	68	64	61	60			60
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61	57	56			56
9	75	65	59	55	74	64	59	55	63	58	55	63	58	54	62	57	54	53			53
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			50

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	80564
5°	78406
10°	72299
15°	63587
20°	53181
25°	42172
30°	30941
35°	21282
40°	13511
45°	7567
50°	4094
55°	3441
60°	2938
65°	2698
70°	2372
75°	2203
80°	1894
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7567 cd/sqm



TEST NUMBER: P1297835
 CATALOG NUMBER: P3AS13R50W2N902765DE010 E3DLP1GPH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	33.0	11.9
10°-20°	77.6	28.0
20°-30°	79.3	28.6
30°-40°	50.3	18.2
40°-50°	20.0	7.2
50°-60°	8.1	2.9
60°-70°	5.2	1.9
70°-80°	2.7	1.0
80°-90°	0.8	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	189.9	68.6
0°-40°	240.2	86.7
0°-60°	268.3	96.9
0°-90°	277.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	277.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	367	
5°	356	33
15°	280	78
25°	174	79
35°	80	50
45°	24	20
55°	9	8
65°	5	5
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1297835
CATALOG NUMBER: P3AS13R50W2N902765DE010 E3DLP1GPH_3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	367.4
2.5°	364.8
5°	356.2
7.5°	342.7
10°	324.7
12.5°	303.3
15°	280.1
17.5°	254.6
20°	227.9
22.5°	201.3
25°	174.3
27.5°	147.3
30°	122.2
32.5°	99.7
35°	79.5
37.5°	62.2
40°	47.2
42.5°	34.9
45°	24.4
47.5°	16.5
50°	12.0
52.5°	10.1
55°	9.0
57.5°	7.9
60°	6.7
62.5°	6.0
65°	5.2
67.5°	4.5
70°	3.7
72.5°	3.0
75°	2.6
77.5°	1.9
80°	1.5
82.5°	1.1
85°	0.7
87.5°	0.4
90°	0.0

(END OF REPORT)