

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1297851

Luminaire Tested: P3AS13R50W2N902765DE010 E3DLP1LI\_6500K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1297851  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-29)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R50W2N902765DE010 E3DLP1LI\_6500K  
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 6500K CCT AND, 90CRI ,  
E3DLP1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 570.0 lumens  
Efficiency: N/A  
Efficacy: 46.3 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.77  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1297851  
CATALOG NUMBER: P3AS13R50W2N902765DE010 E3DLP1LI\_6500K

### Luminous Intensity Polar Plot

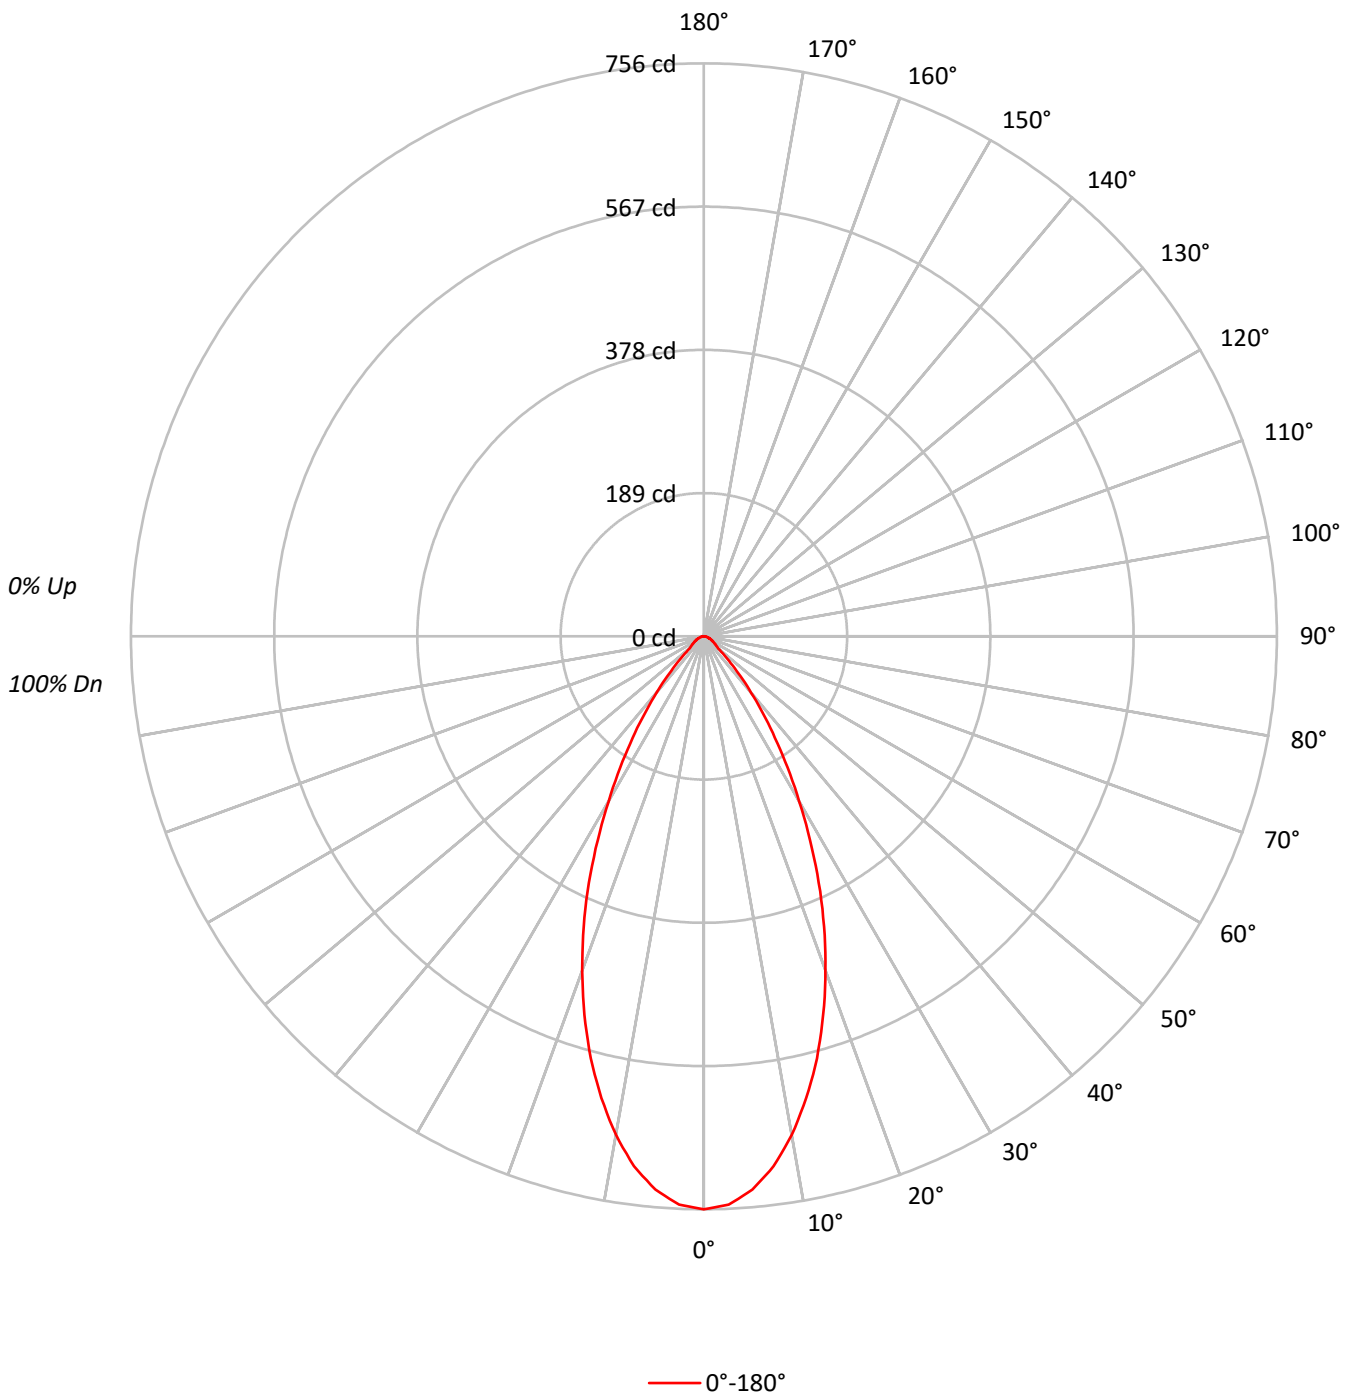



TEST NUMBER: P1297851  
 CATALOG NUMBER: P3AS13R50W2N902765DE010 E3DLP1LI\_6500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93			
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85			
3	101	95	89	85	99	93	88	85	91	87	83	88	85	82	86	83	81	79			
4	96	88	82	78	94	87	82	78	85	80	77	83	79	76	81	78	75	73			
5	91	83	76	72	90	82	76	72	80	75	71	78	74	70	77	73	70	68			
6	87	77	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64			
7	82	73	67	62	81	72	66	62	71	66	62	70	65	61	68	64	61	60			
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61	57	56			
9	75	65	59	55	74	64	59	55	63	58	55	63	58	54	62	57	54	53			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	165776
5°	161325
10°	148761
15°	130829
20°	109443
25°	86787
30°	63681
35°	43768
40°	27824
45°	15536
50°	8426
55°	7073
60°	6096
65°	5604
70°	4937
75°	4575
80°	3915
85°	3774

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 15536 cd/sqm



TEST NUMBER: P1297851

CATALOG NUMBER: P3AS13R50W2N902765DE010 E3DLP1LI\_6500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	67.9	11.9
10°-20°	159.6	28.0
20°-30°	163.2	28.6
30°-40°	103.5	18.2
40°-50°	41.2	7.2
50°-60°	16.7	2.9
60°-70°	10.7	1.9
70°-80°	5.5	1.0
80°-90°	1.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	390.7	68.6
0°-40°	494.3	86.7
0°-60°	552.1	96.9
0°-90°	570.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	570.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	756	
5°	733	68
15°	576	160
25°	359	163
35°	164	104
45°	50	41
55°	18	17
65°	11	11
75°	5	6
85°	2	2
90°	0	



TEST NUMBER: P1297851  
CATALOG NUMBER: P3AS13R50W2N902765DE010 E3DLP1LI\_6500K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	756.0
2.5°	750.6
5°	732.9
7.5°	705.1
10°	668.1
12.5°	624.1
15°	576.3
17.5°	523.8
20°	469.0
22.5°	414.3
25°	358.7
27.5°	303.2
30°	251.5
32.5°	205.2
35°	163.5
37.5°	128.1
40°	97.2
42.5°	71.7
45°	50.1
47.5°	33.9
50°	24.7
52.5°	20.8
55°	18.5
57.5°	16.2
60°	13.9
62.5°	12.3
65°	10.8
67.5°	9.3
70°	7.7
72.5°	6.2
75°	5.4
77.5°	3.9
80°	3.1
82.5°	2.3
85°	1.5
87.5°	0.8
90°	0.0

(END OF REPORT)