

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1297866

Luminaire Tested: P3AS13R50W2N902765DE010 E3DLP1WMH_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1297866
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-29)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R50W2N902765DE010 E3DLP1WMH_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 3500K CCT AND, 90CRI ,
E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 573.0 lumens
Efficiency: N/A
Efficacy: 46.6 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.77
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1297866
CATALOG NUMBER: P3AS13R50W2N902765DE010 E3DLP1WMH_3500K

Luminous Intensity Polar Plot

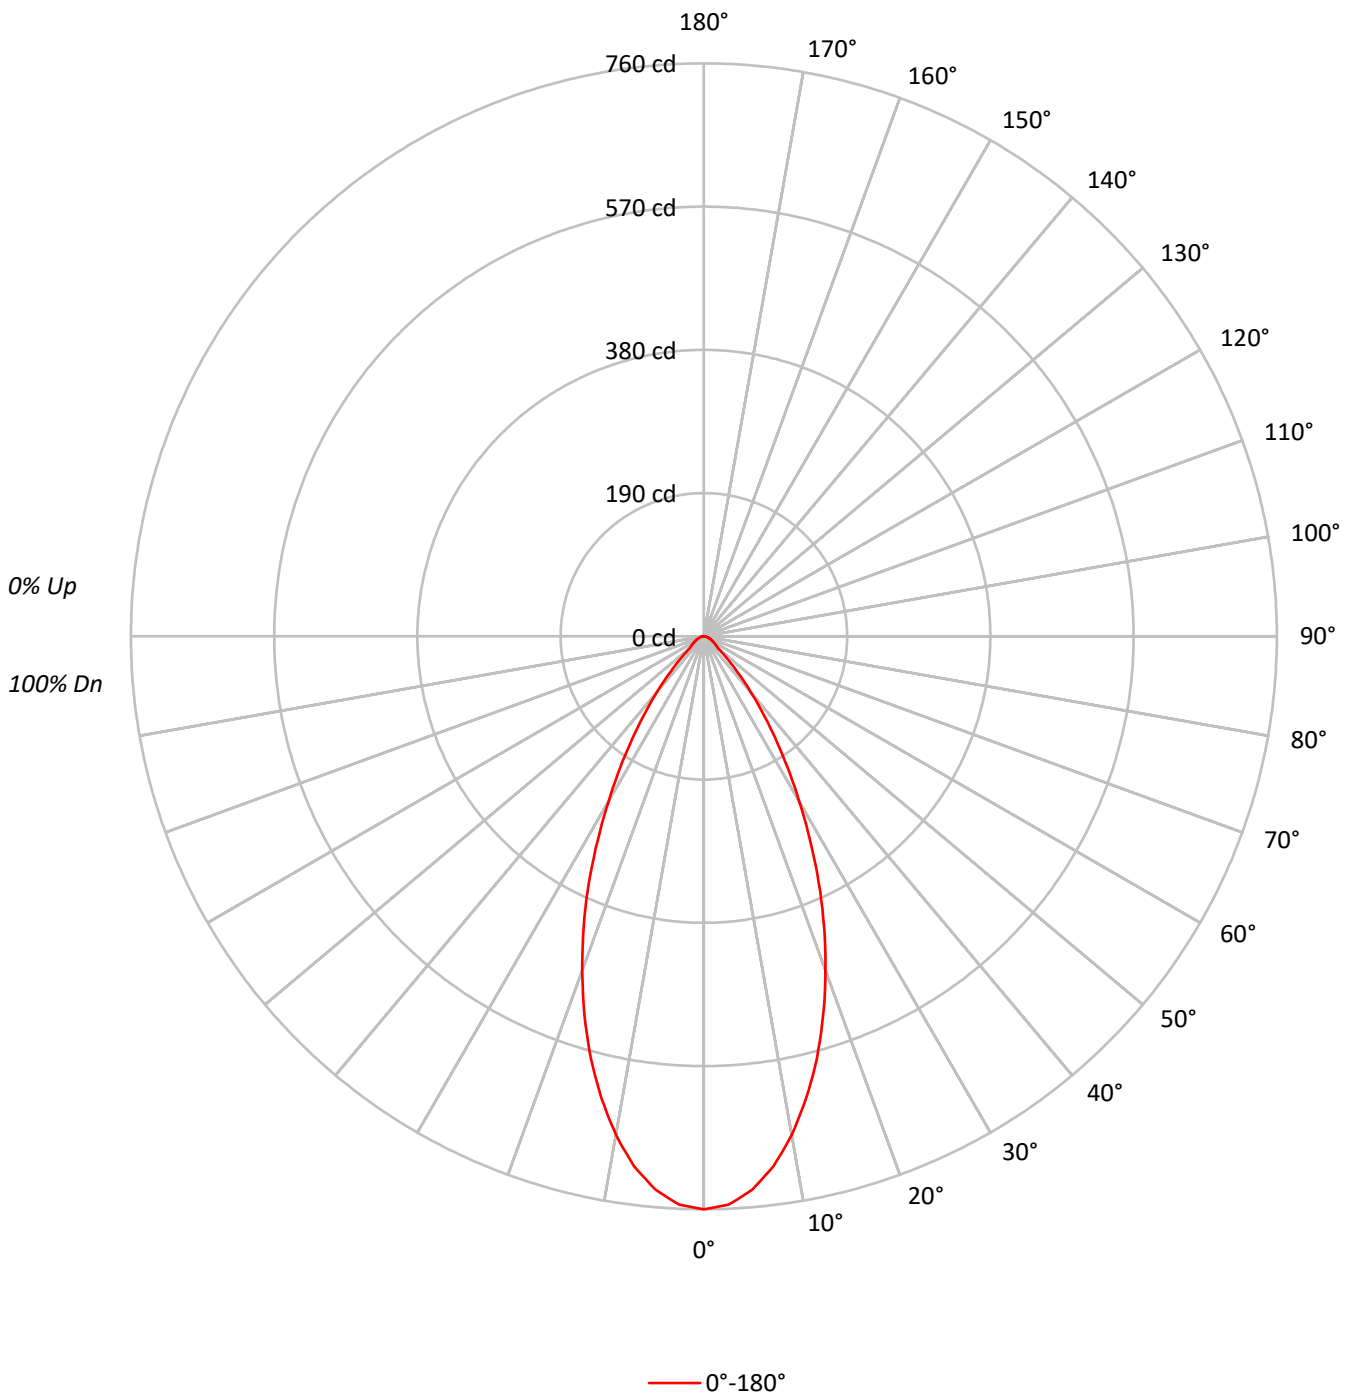



TEST NUMBER: P1297866

CATALOG NUMBER: P3AS13R50W2N902765DE010 E3DLP1WMH_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	68.3	11.9
10°-20°	160.4	28.0
20°-30°	164.1	28.6
30°-40°	104.1	18.2
40°-50°	41.4	7.2
50°-60°	16.8	2.9
60°-70°	10.8	1.9
70°-80°	5.5	1.0
80°-90°	1.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	392.8	68.6
0°-40°	496.9	86.7
0°-60°	555.0	96.9
0°-90°	573.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	573.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	760	
5°	737	68
15°	579	160
25°	361	164
35°	164	104
45°	50	41
55°	19	17
65°	11	11
75°	5	6
85°	2	2
90°	0	



TEST NUMBER: P1297866
CATALOG NUMBER: P3AS13R50W2N902765DE010 E3DLP1WMH_3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	760.0
2.5°	754.6
5°	736.7
7.5°	708.8
10°	671.6
12.5°	627.4
15°	579.3
17.5°	526.6
20°	471.5
22.5°	416.5
25°	360.6
27.5°	304.8
30°	252.8
32.5°	206.3
35°	164.4
37.5°	128.7
40°	97.7
42.5°	72.1
45°	50.4
47.5°	34.1
50°	24.8
52.5°	20.9
55°	18.6
57.5°	16.3
60°	14.0
62.5°	12.4
65°	10.9
67.5°	9.3
70°	7.8
72.5°	6.2
75°	5.4
77.5°	3.9
80°	3.1
82.5°	2.3
85°	1.6
87.5°	0.8
90°	0.0

(END OF REPORT)