

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1298078

Luminaire Tested: P3AS13R55W2N902765DE010 E3D1WMH\_4000K

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1298078  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-14)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R55W2N902765DE010 E3D1WMH\_4000K  
Description: 3in Adjustable Tunable White LED luminaire with, R55 optic, 4000K CCT AND, 90CRI , E3D1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1001.0 lumens  
Efficiency: N/A  
Efficacy: 81.4 lumens/watt  
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.82  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1298078  
CATALOG NUMBER: P3AS13R55W2N902765DE010 E3D1WMH\_4000K

### Luminous Intensity Polar Plot

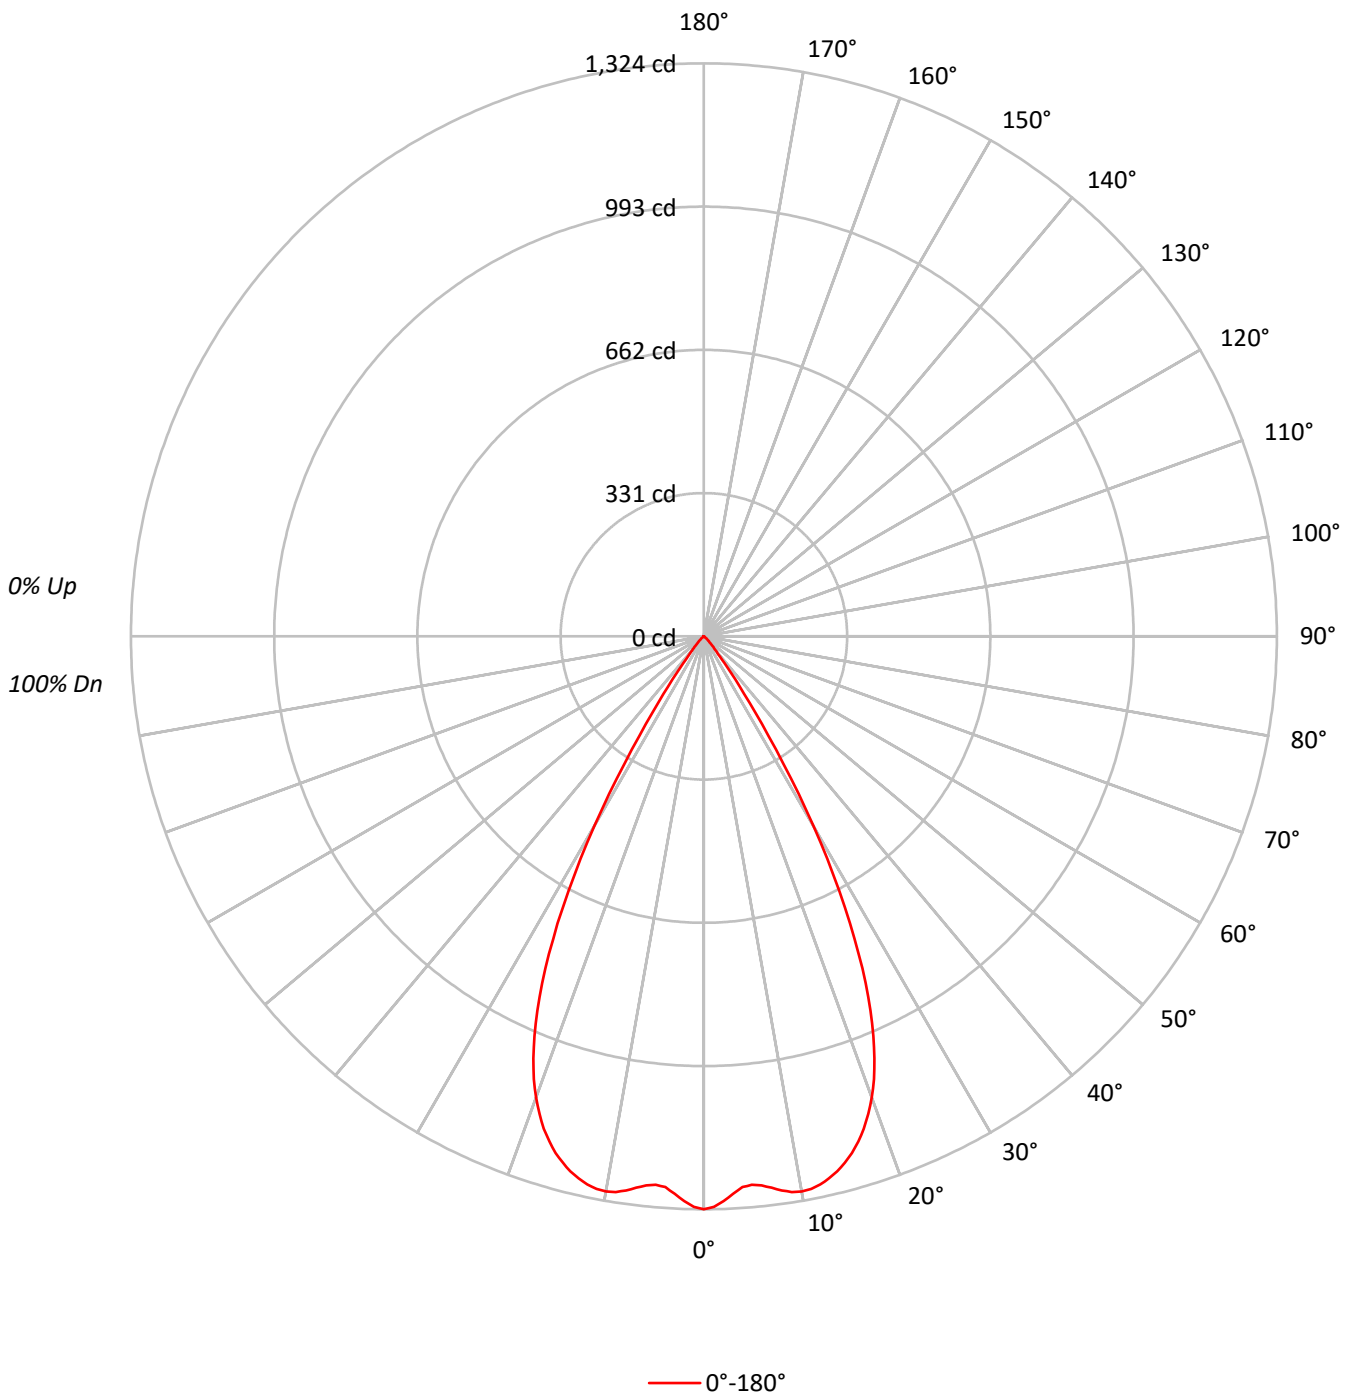



TEST NUMBER: P1298078

CATALOG NUMBER: P3AS13R55W2N902765DE010 E3D1WMH\_4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102	102	100	99	98	97	96	96	96	96	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	91	91	91	89
3	104	98	94	90	102	97	93	90	95	91	88	92	89	87	90	88	86	86	86	86	84
4	100	93	88	84	98	92	87	84	90	86	83	88	84	82	86	83	81	81	81	81	79
5	95	88	82	79	94	87	82	78	85	81	78	84	80	77	82	79	76	76	76	76	75
6	91	83	78	74	90	82	77	74	81	76	73	80	76	73	78	75	72	72	72	72	71
7	87	79	73	70	86	78	73	69	77	72	69	76	72	69	75	71	68	68	68	68	67
8	83	75	69	66	82	74	69	65	73	69	65	72	68	65	71	68	65	65	65	65	63
9	80	71	66	62	79	71	66	62	70	65	62	69	65	62	68	64	61	61	61	61	60
10	77	68	62	59	76	67	62	59	67	62	59	66	62	59	65	61	58	58	58	58	57

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	290284
5°	280012
10°	290019
15°	285927
20°	264623
25°	214004
30°	128248
35°	43473
40°	11965
45°	5303
50°	1569
55°	306
60°	175
65°	208
70°	256
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 5303 cd/sqm



TEST NUMBER: P1298078

CATALOG NUMBER: P3AS13R55W2N902765DE010 E3D1WMH\_4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	123.1	12.3
10°-20°	350.7	35.0
20°-30°	389.8	38.9
30°-40°	121.3	12.1
40°-50°	14.6	1.5
50°-60°	1.1	0.1
60°-70°	0.4	0.0
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	863.5	86.3
0°-40°	984.9	98.4
0°-60°	1000.6	100.0
0°-90°	1001.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1001.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1324	
5°	1272	123
15°	1260	351
25°	884	390
35°	162	121
45°	17	15
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1298078

CATALOG NUMBER: P3AS13R55W2N902765DE010 E3D1WMH\_4000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1323.8
1°	1318.8
2°	1305.9
3°	1289.9
4°	1275.5
5°	1272.1
6°	1275.9
7°	1283.8
8°	1293.0
9°	1300.2
10°	1302.5
11°	1301.0
12°	1294.9
13°	1285.4
14°	1274.3
15°	1259.5
16°	1242.4
17°	1220.7
18°	1196.4
19°	1167.1
20°	1134.0
21°	1096.4
22°	1051.9
23°	1002.8
24°	946.5
25°	884.5
26°	816.5
27°	744.2
28°	667.0
29°	587.5
30°	506.5
31°	425.2
32°	345.7
32.5°	310.3
33°	273.8
34°	211.8
35°	162.4
36°	123.6
37°	91.6
37.5°	78.3
38°	68.1
39°	51.7
40°	41.8
42.5°	26.6
45°	17.1



TEST NUMBER: P1298078  
CATALOG NUMBER: P3AS13R55W2N902765DE010 E3D1WMH\_4000K

**CANDELA DISTRIBUTION (continued):**

	0°
47.5°	10.3
50°	4.6
52.5°	1.5
55°	0.8
57.5°	0.4
60°	0.4
62.5°	0.4
65°	0.4
67.5°	0.4
70°	0.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)