

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1298270

Luminaire Tested: P3AS13R60W2N902750DE010 E3DL1WMH\_3000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1298270  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-39)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R60W2N902750DE010 E3DL1WMH\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 3000K CCT AND, 90CRI ,  
E3DL1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 804.0 lumens  
Efficiency: N/A  
Efficacy: 65.4 lumens/watt  
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.87  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1298270  
CATALOG NUMBER: P3AS13R60W2N902750DE010 E3DL1WMH\_3000K

### Luminous Intensity Polar Plot

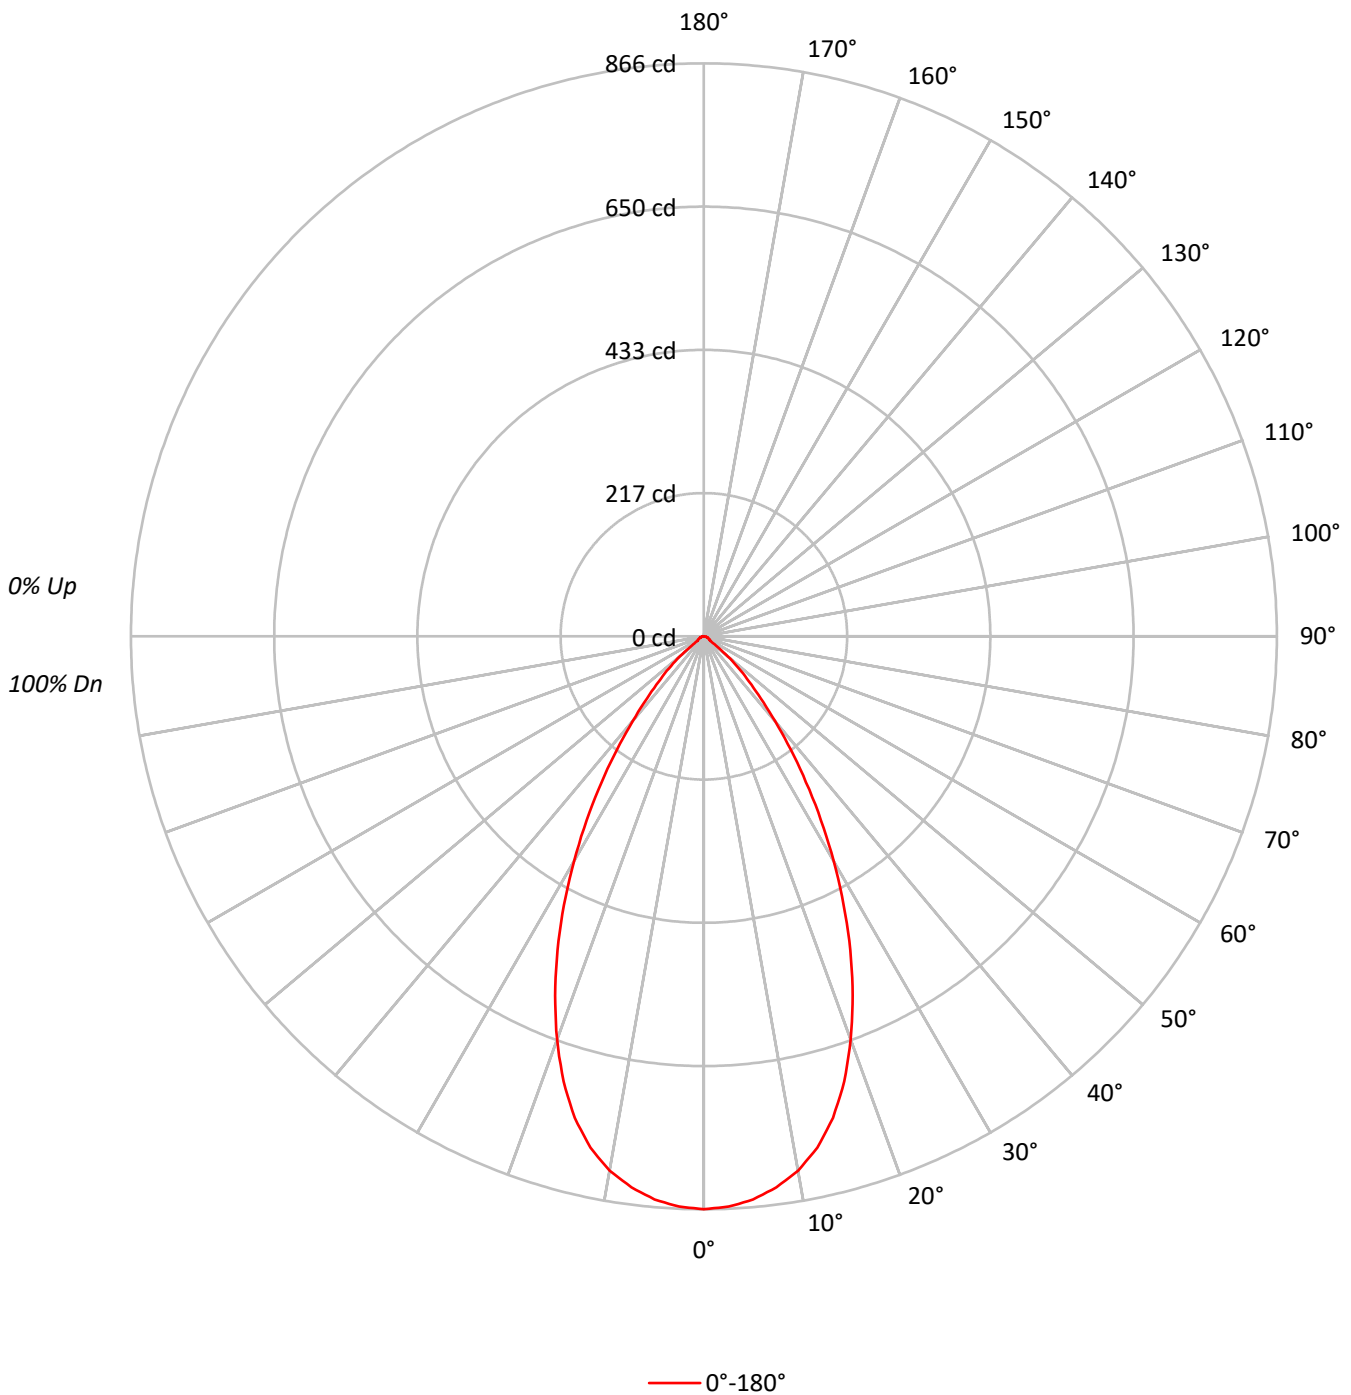





TEST NUMBER: P1298270  
 CATALOG NUMBER: P3AS13R60W2N902750DE010 E3DL1WMH\_3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	80.4	10.0
10°-20°	209.0	26.0
20°-30°	238.2	29.6
30°-40°	169.0	21.0
40°-50°	76.7	9.5
50°-60°	16.3	2.0
60°-70°	7.8	1.0
70°-80°	4.8	0.6
80°-90°	1.7	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	527.7	65.6
0°-40°	696.7	86.7
0°-60°	789.6	98.2
0°-90°	804.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	804.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	866	
5°	854	80
15°	754	209
25°	523	238
35°	269	169
45°	96	77
55°	12	16
65°	8	8
75°	5	5
85°	2	2
90°	0	



TEST NUMBER: P1298270  
CATALOG NUMBER: P3AS13R60W2N902750DE010 E3DL1WMH\_3000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	865.8
2.5°	862.7
5°	854.3
7.5°	839.8
10°	819.9
12.5°	791.7
15°	753.5
17.5°	705.3
20°	648.8
22.5°	587.6
25°	523.4
27.5°	457.7
30°	392.0
32.5°	329.4
35°	269.0
37.5°	215.5
40°	167.3
42.5°	126.8
45°	96.3
47.5°	71.8
50°	47.4
52.5°	22.2
55°	12.2
57.5°	10.7
60°	9.9
62.5°	9.2
65°	7.6
67.5°	6.9
70°	6.1
72.5°	5.3
75°	4.6
77.5°	3.8
80°	3.1
82.5°	2.3
85°	1.5
87.5°	0.8
90°	0.0

(END OF REPORT)