

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1298276

Luminaire Tested: P3AS13R60W2N902750DE010 E3DLD1GPH_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1298276
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-38)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R60W2N902750DE010 E3DLD1GPH_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 3500K CCT AND, 90CRI ,
E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 313.0 lumens
Efficiency: N/A
Efficacy: 25.4 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1298276
CATALOG NUMBER: P3AS13R60W2N902750DE010 E3DLD1GPH_3500K

Luminous Intensity Polar Plot

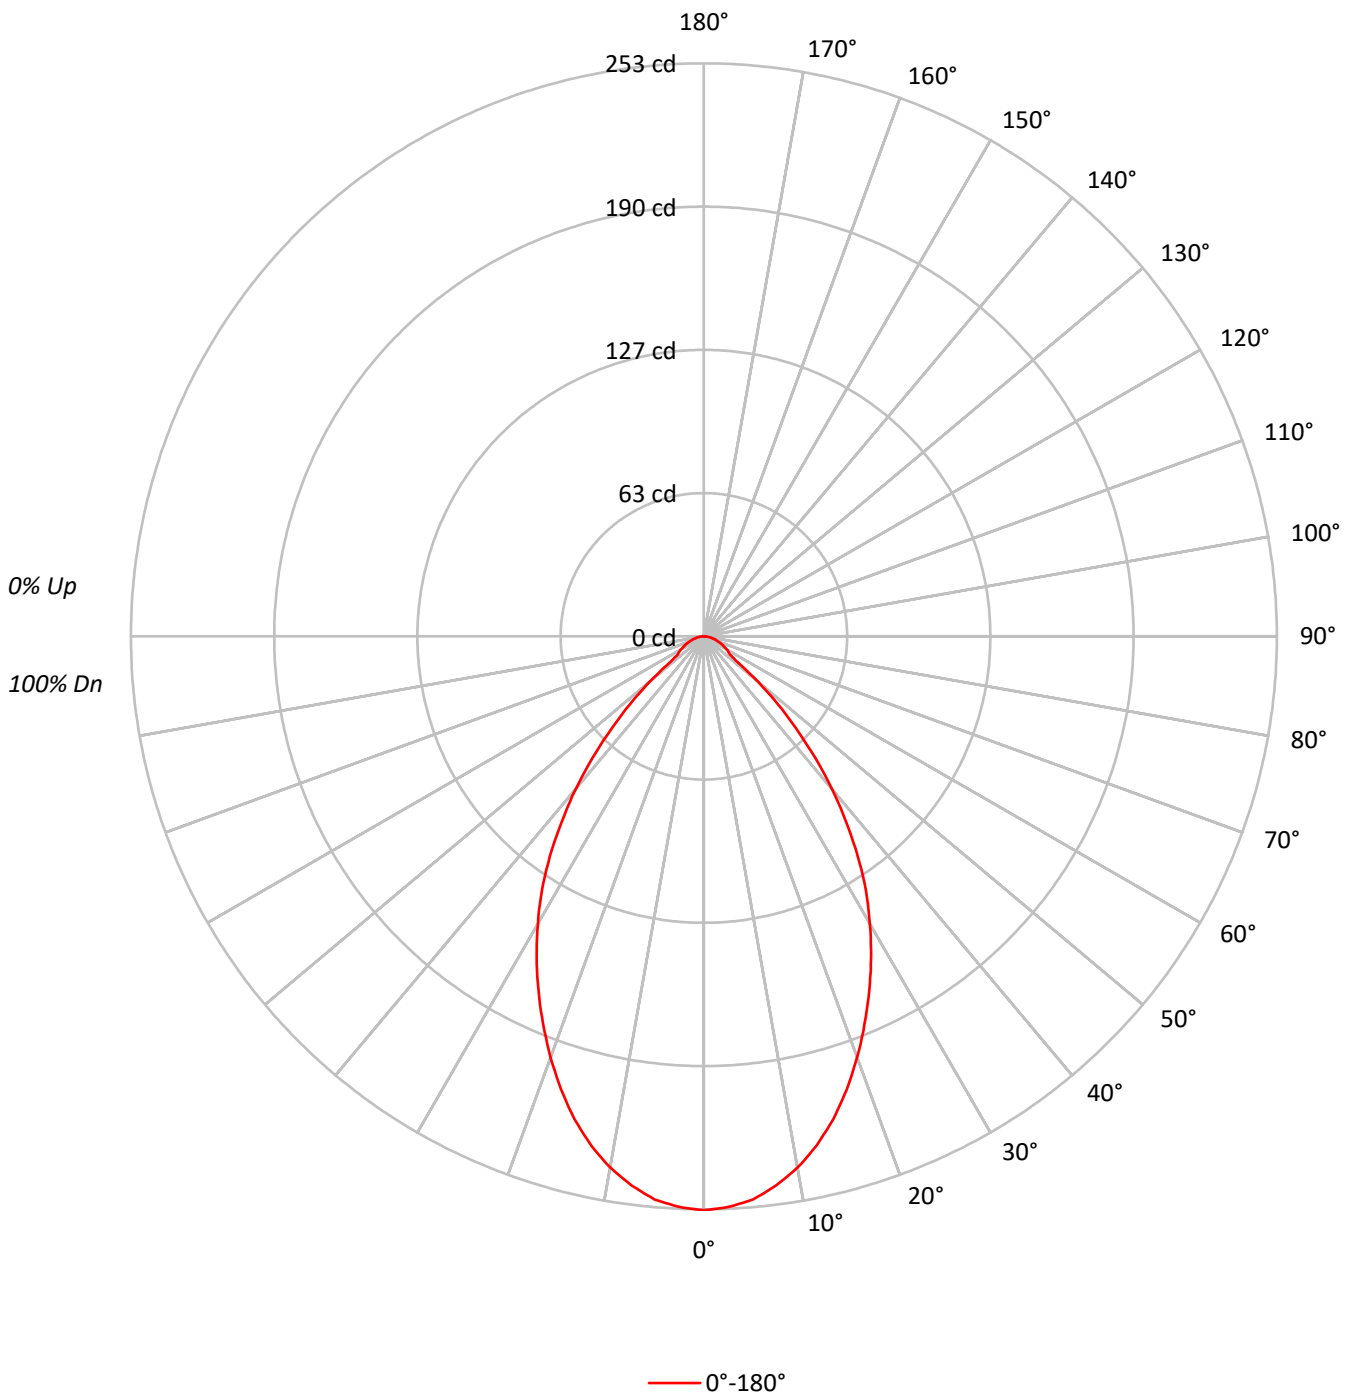



TEST NUMBER: P1298276
 CATALOG NUMBER: P3AS13R60W2N902750DE010 E3DLD1GPH_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	93	91
2	105	99	94	90	103	98	93	89	94	90	87	91	88	85	88	86	84	82
3	99	91	85	80	96	89	84	79	87	82	78	84	80	77	82	78	76	74
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67
5	87	77	70	65	85	76	69	65	74	68	64	72	67	63	71	66	63	61
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51
8	72	61	55	50	71	61	54	50	60	54	49	59	53	49	58	53	49	47
9	68	57	51	46	67	57	50	46	56	50	46	55	49	46	54	49	45	44
10	65	54	47	43	64	53	47	43	52	47	43	52	46	42	51	46	42	41

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	55566
5°	54942
10°	53038
15°	50102
20°	46181
25°	41809
30°	37120
35°	31722
40°	25219
45°	17800
50°	10644
55°	5390
60°	5175
65°	4722
70°	4360
75°	4151
80°	3788
85°	2768

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17800 cd/sqm



TEST NUMBER: P1298276

CATALOG NUMBER: P3AS13R60W2N902750DE010 E3DLD1GPH_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	23.5	7.5
10°-20°	61.7	19.7
20°-30°	79.2	25.3
30°-40°	73.4	23.5
40°-50°	44.7	14.3
50°-60°	14.9	4.8
60°-70°	9.1	2.9
70°-80°	5.1	1.6
80°-90°	1.4	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	164.3	52.5
0°-40°	237.7	76.0
0°-60°	297.4	95.0
0°-90°	313.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	313.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	253	
5°	250	23
15°	221	62
25°	173	79
35°	118	73
45°	57	45
55°	14	15
65°	9	9
75°	5	5
85°	1	1
90°	0	



TEST NUMBER: P1298276
CATALOG NUMBER: P3AS13R60W2N902750DE010 E3DLD1GPH_3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	253.4
2.5°	252.2
5°	249.6
7.5°	244.6
10°	238.2
12.5°	230.2
15°	220.7
17.5°	209.7
20°	197.9
22.5°	185.4
25°	172.8
27.5°	159.9
30°	146.6
32.5°	133.3
35°	118.5
37.5°	102.9
40°	88.1
42.5°	72.6
45°	57.4
47.5°	44.4
50°	31.2
52.5°	18.6
55°	14.1
57.5°	12.9
60°	11.8
62.5°	10.3
65°	9.1
67.5°	8.0
70°	6.8
72.5°	5.7
75°	4.9
77.5°	3.8
80°	3.0
82.5°	1.9
85°	1.1
87.5°	0.8
90°	0.0

(END OF REPORT)