

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1298338

Luminaire Tested: P3AS13R60W2N902765DE010 E3CB1MB\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1298338  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-40)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R60W2N902765DE010 E3CB1MB\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 5000K CCT AND, 90CRI ,  
E3CB1MB TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 997.0 lumens  
Efficiency: N/A  
Efficacy: 81.1 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1298338  
CATALOG NUMBER: P3AS13R60W2N902765DE010 E3CB1MB\_5000K

### Luminous Intensity Polar Plot

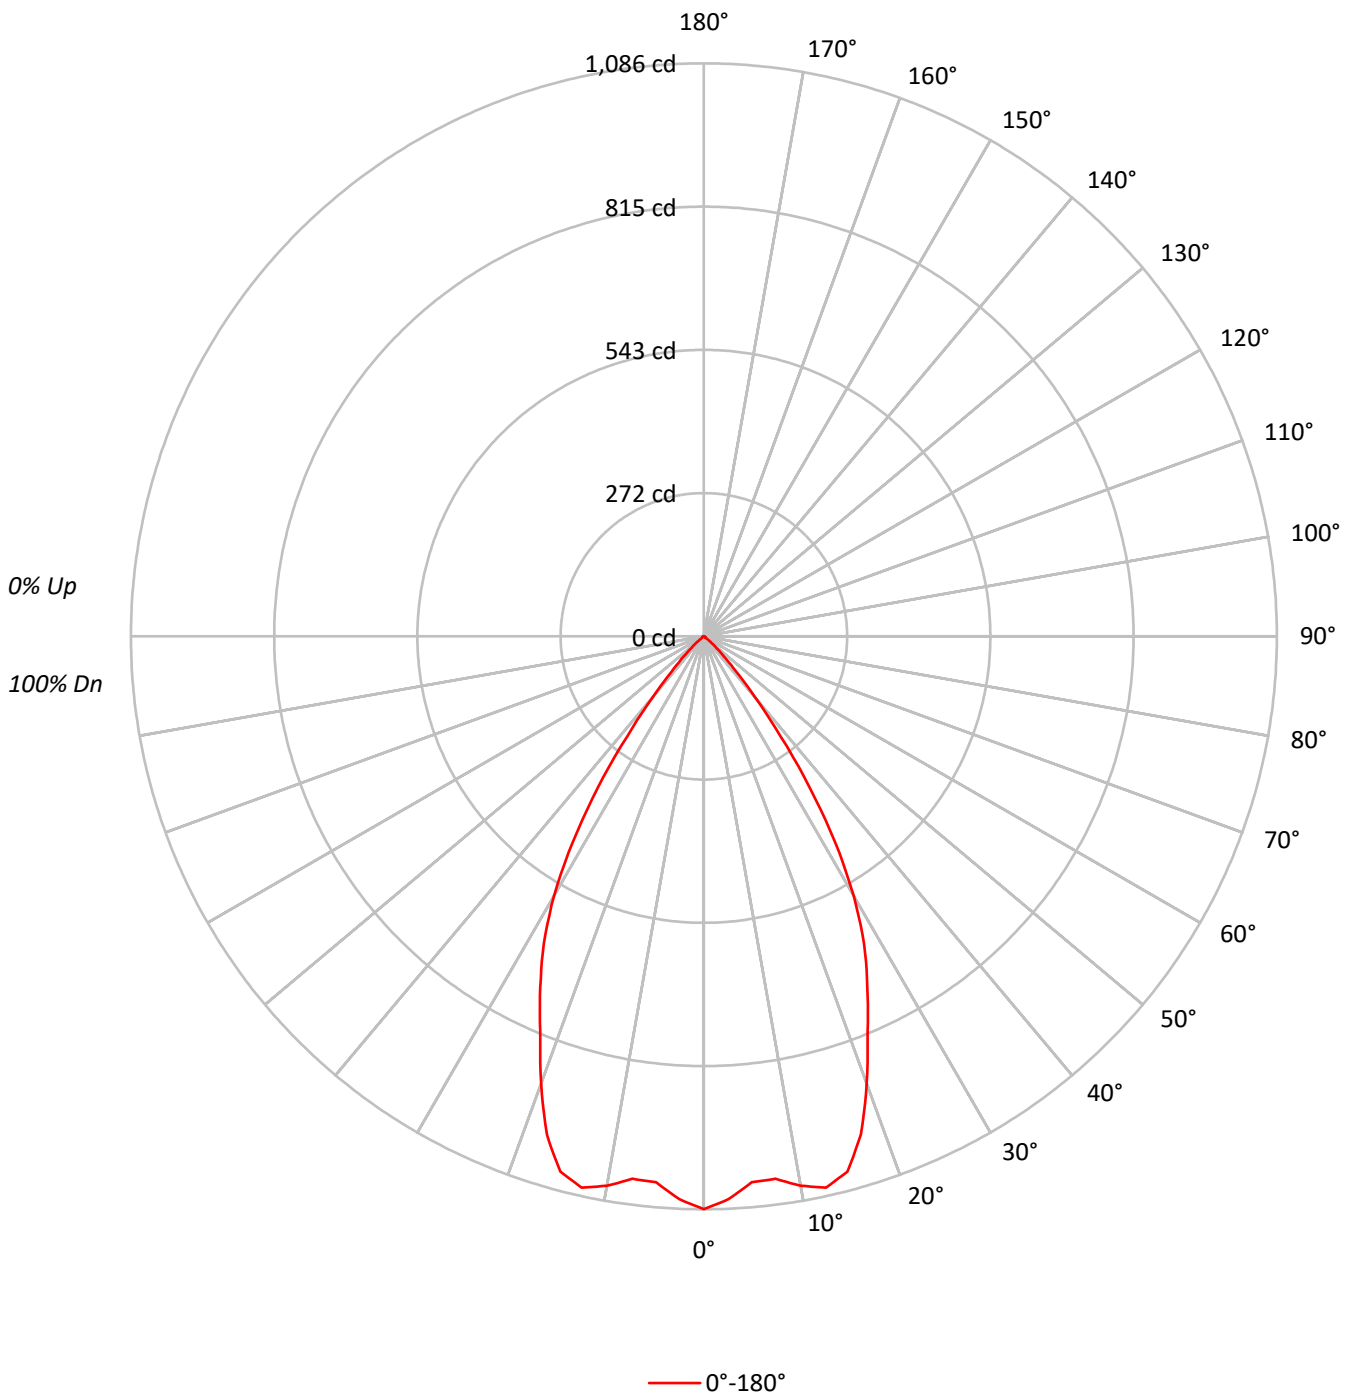



TEST NUMBER: P1298338

CATALOG NUMBER: P3AS13R60W2N902765DE010 E3CB1MB\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94				94
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87				87
3	103	96	91	88	101	95	90	87	92	89	85	90	87	84	88	85	83	81				81
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	77	76				76
5	93	84	79	74	91	84	78	74	82	77	73	80	76	73	79	75	72	71				71
6	88	79	73	69	87	79	73	69	77	72	68	76	71	68	74	70	68	66				66
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62				62
8	80	70	64	60	78	70	64	60	69	64	60	68	63	60	67	62	59	58				58
9	76	66	61	57	75	66	60	56	65	60	56	64	59	56	63	59	56	55				55
10	72	63	57	53	71	62	57	53	62	56	53	61	56	53	60	56	53	51				51

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	238073
5°	228637
10°	235400
15°	238435
20°	210532
25°	177422
30°	143896
35°	93719
40°	43052
45°	16498
50°	5526
55°	1491
60°	1360
65°	1193
70°	962
75°	1271
80°	1010
85°	2013

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 16498 cd/sqm



TEST NUMBER: P1298338

CATALOG NUMBER: P3AS13R60W2N902765DE010 E3CB1MB\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	100.0	10.0
10°-20°	287.6	28.8
20°-30°	335.5	33.6
30°-40°	216.5	21.7
40°-50°	48.5	4.9
50°-60°	4.9	0.5
60°-70°	2.3	0.2
70°-80°	1.3	0.1
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	723.0	72.5
0°-40°	939.5	94.2
0°-60°	992.9	99.6
0°-90°	997.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	997.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1086	
5°	1039	100
15°	1050	288
25°	733	335
35°	350	216
45°	53	48
55°	4	5
65°	2	2
75°	2	1
85°	1	1
90°	0	



TEST NUMBER: P1298338  
CATALOG NUMBER: P3AS13R60W2N902765DE010 E3CB1MB\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1085.7
2.5°	1068.0
5°	1038.7
7.5°	1037.1
10°	1057.2
12.5°	1070.3
15°	1050.3
17.5°	990.1
20°	902.2
22.5°	810.4
25°	733.3
27.5°	657.8
30°	568.3
32.5°	463.4
35°	350.1
37.5°	239.0
40°	150.4
42.5°	90.2
45°	53.2
47.5°	30.8
50°	16.2
52.5°	5.4
55°	3.9
57.5°	3.1
60°	3.1
62.5°	2.3
65°	2.3
67.5°	2.3
70°	1.5
72.5°	1.5
75°	1.5
77.5°	0.8
80°	0.8
82.5°	0.8
85°	0.8
87.5°	0.0
90°	0.0

(END OF REPORT)