

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1298394

Luminaire Tested: P3AS13R60W2N902765DE010 E3D1WMH\_2700K

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1298394  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R60W2N902765DE010 E3D1WMH\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 2700K CCT AND, 90CRI ,  
E3D1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 830.0 lumens  
Efficiency: N/A  
Efficacy: 67.5 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.88  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1298394  
CATALOG NUMBER: P3AS13R60W2N902765DE010 E3D1WMH\_2700K

### Luminous Intensity Polar Plot

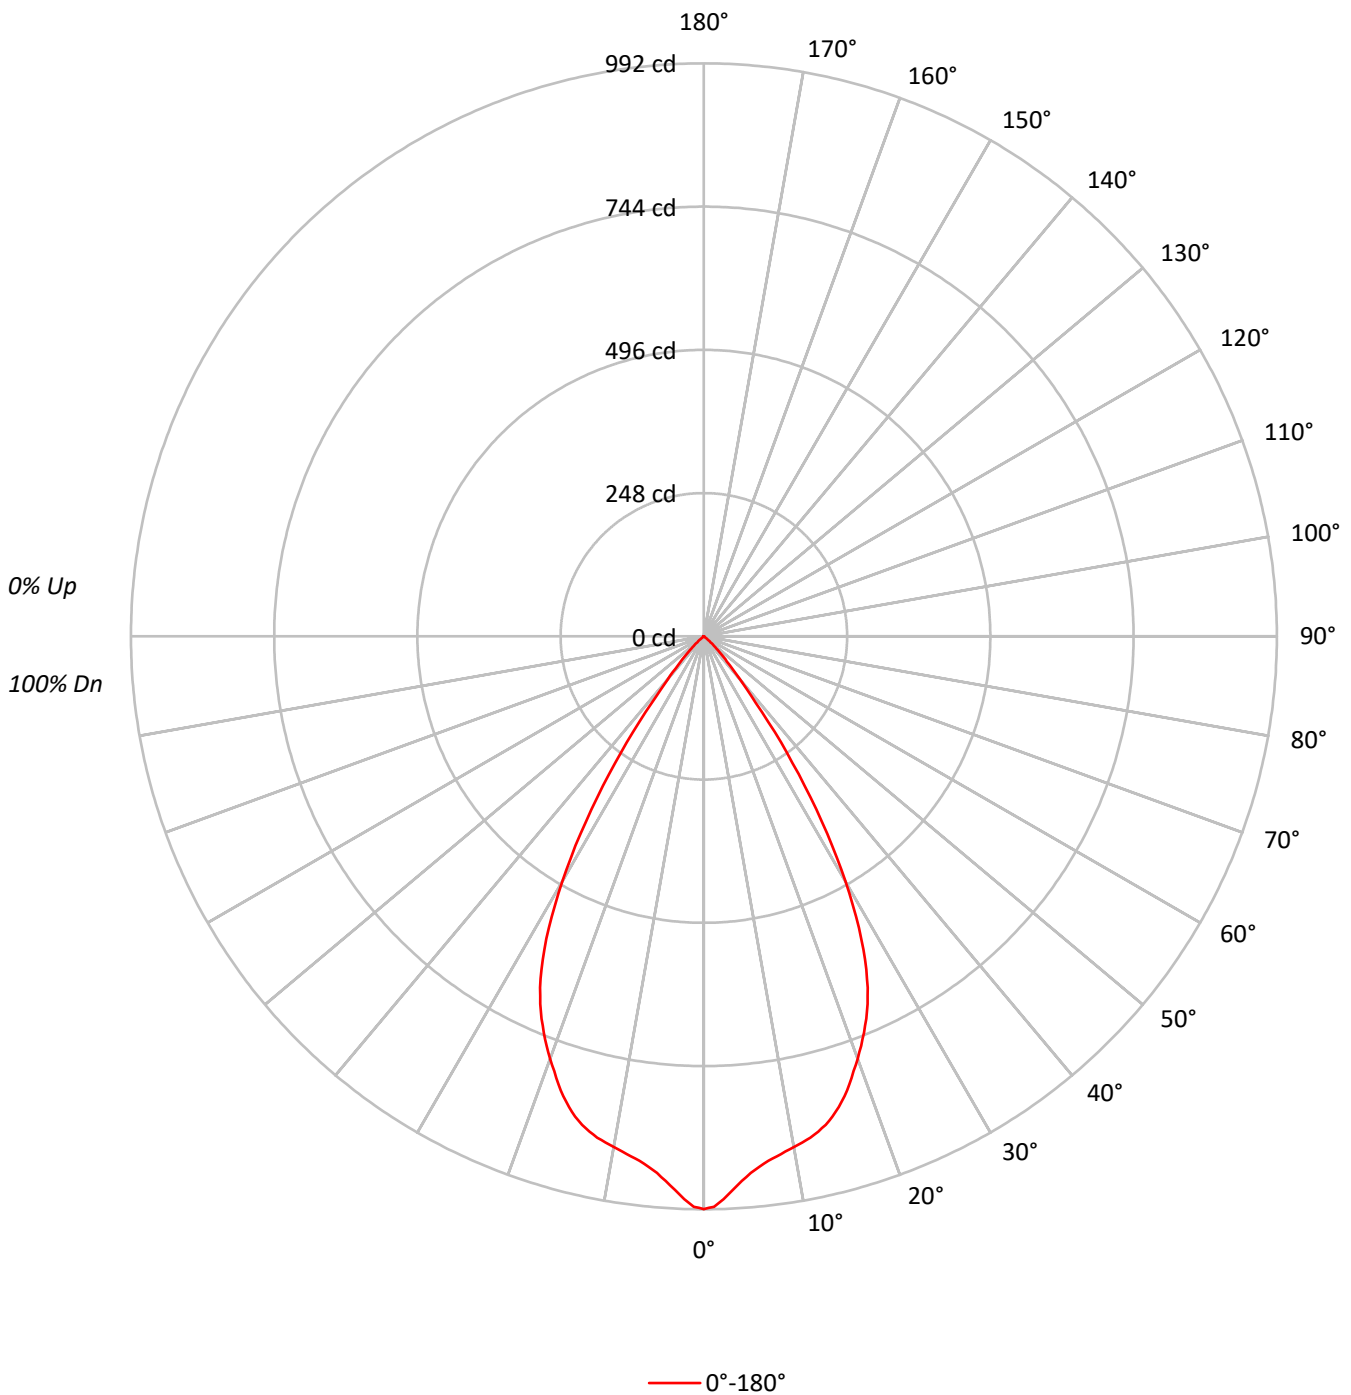



TEST NUMBER: P1298394  
 CATALOG NUMBER: P3AS13R60W2N902765DE010 E3D1WMH\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	109	106	111	109	107	105	105	103	102	101	100	99	98	97	96	94	94	94	94
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88	88	88	88
3	103	97	92	88	101	96	91	88	93	89	86	91	87	85	88	86	84	82	82	82	82
4	98	91	85	81	96	90	85	81	88	83	80	86	82	79	84	81	78	77	77	77	77
5	93	85	80	75	92	84	79	75	83	78	74	81	77	74	79	76	73	72	72	72	72
6	89	80	74	70	87	79	74	70	78	73	70	77	72	69	75	72	69	67	67	67	67
7	85	76	70	66	83	75	69	65	74	69	65	72	68	65	71	67	64	63	63	63	63
8	81	71	65	61	79	71	65	61	70	65	61	69	64	61	68	64	61	59	59	59	59
9	77	67	62	58	76	67	61	58	66	61	57	65	61	57	64	60	57	56	56	56	56
10	73	64	58	54	72	63	58	54	63	58	54	62	57	54	61	57	54	53	53	53	53

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	217461
5°	205304
10°	199952
15°	195393
20°	181666
25°	162396
30°	124044
35°	71608
40°	27795
45°	11567
50°	2559
55°	382
60°	307
65°	156
70°	192
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11567 cd/sqm



TEST NUMBER: P1298394

CATALOG NUMBER: P3AS13R60W2N902765DE010 E3D1WMH\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	88.0	10.6
10°-20°	239.8	28.9
20°-30°	300.3	36.2
30°-40°	167.9	20.2
40°-50°	31.9	3.8
50°-60°	1.6	0.2
60°-70°	0.3	0.0
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	628.1	75.7
0°-40°	796.0	95.9
0°-60°	829.5	99.9
0°-90°	830.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	830.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	992	
5°	933	88
15°	861	240
25°	671	300
35°	268	168
45°	37	32
55°	1	2
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1298394  
CATALOG NUMBER: P3AS13R60W2N902765DE010 E3D1WMH\_2700K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	991.7
1°	987.7
2°	974.8
3°	959.5
4°	945.2
5°	932.7
6°	923.2
7°	915.0
8°	908.9
9°	903.1
10°	898.0
11°	892.9
12°	887.2
13°	880.0
14°	871.6
15°	860.7
16°	847.5
17°	832.5
18°	815.5
19°	796.2
20°	778.5
21°	759.5
22°	739.8
23°	719.1
24°	696.4
25°	671.2
26°	641.7
27°	608.8
28°	571.8
29°	532.4
30°	489.9
31°	447.2
32°	403.0
32.5°	378.9
33°	357.2
34°	312.0
35°	267.5
36°	227.5
37°	185.0
37.5°	165.7
38°	146.7
39°	118.2
40°	97.1
42.5°	59.1
45°	37.3



TEST NUMBER: P1298394  
CATALOG NUMBER: P3AS13R60W2N902765DE010 E3D1WMH\_2700K

**CANDELA DISTRIBUTION (continued):**

	0°
47.5°	20.7
50°	7.5
52.5°	1.7
55°	1.0
57.5°	0.7
60°	0.7
62.5°	0.3
65°	0.3
67.5°	0.3
70°	0.3
72.5°	0.3
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)