

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1298416

Luminaire Tested: P3AS13R60W2N902765DE010 E3DL1LI_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1298416
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-39)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R60W2N902765DE010 E3DL1LI_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 5000K CCT AND, 90CRI ,
E3DL1LI TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 811.0 lumens
Efficiency: N/A
Efficacy: 65.9 lumens/watt
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1298416
CATALOG NUMBER: P3AS13R60W2N902765DE010 E3DL1LI_5000K

Luminous Intensity Polar Plot

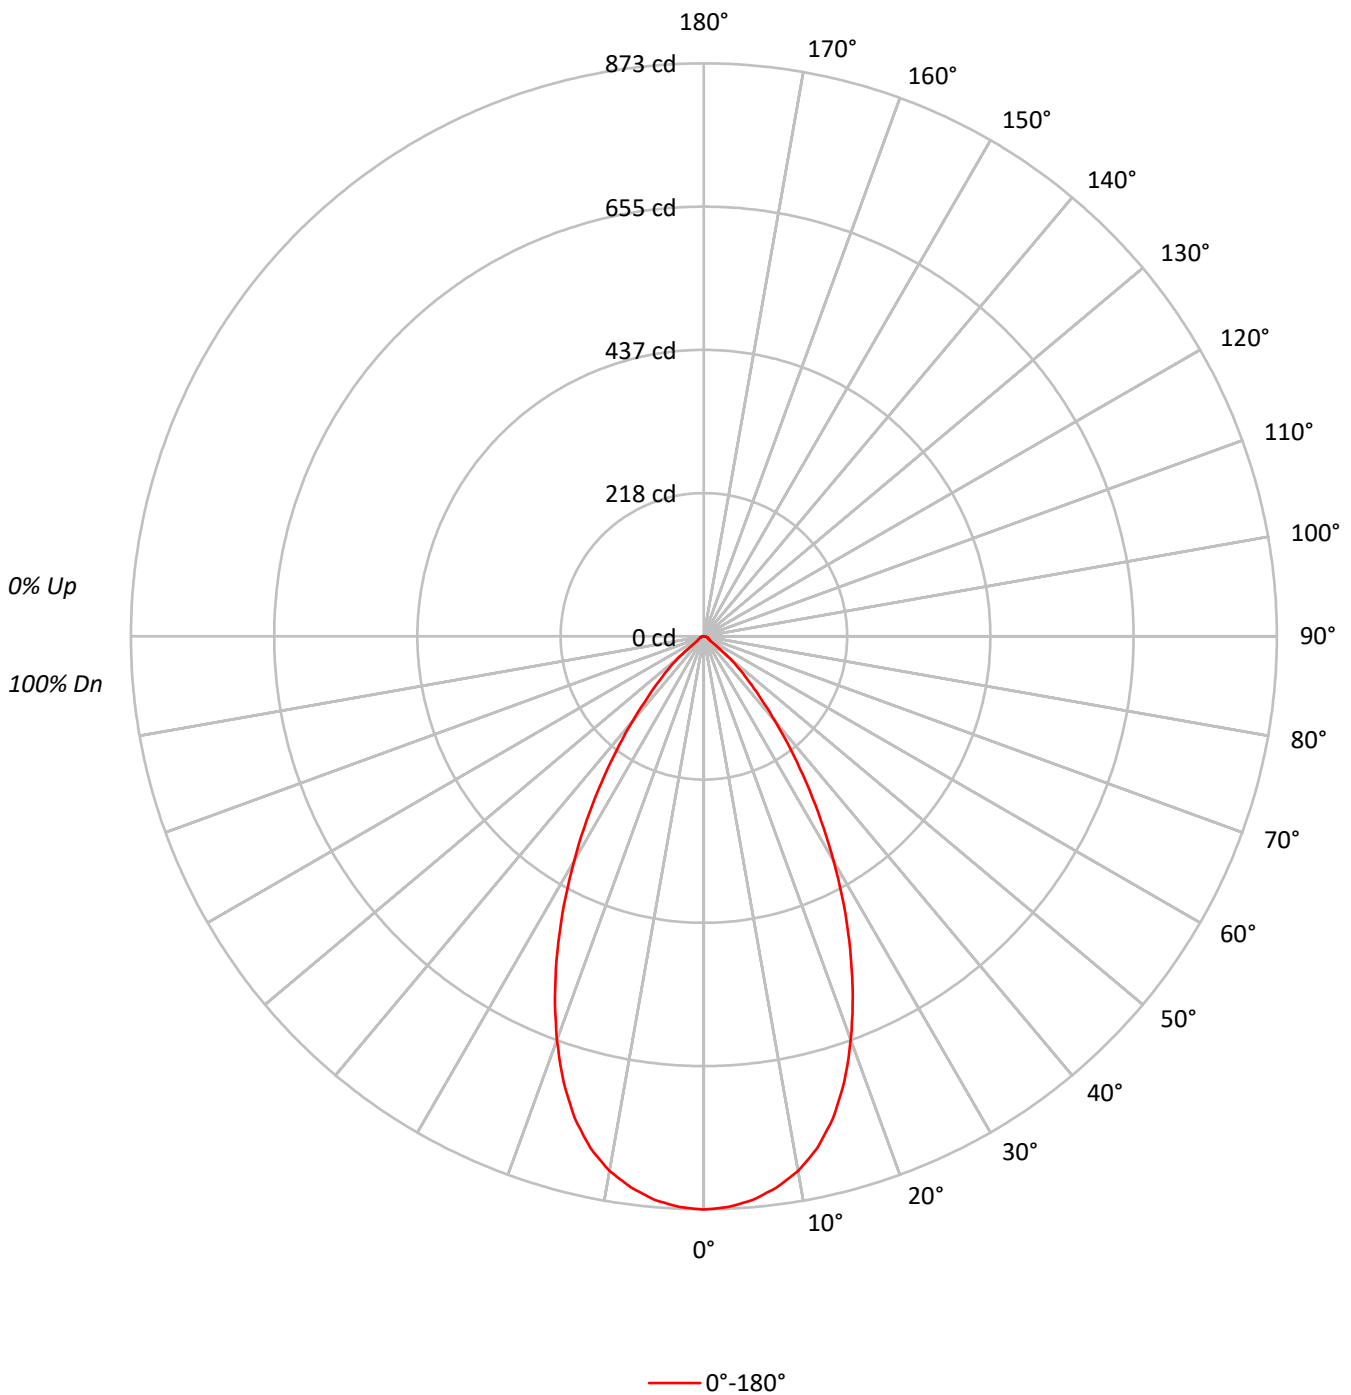



TEST NUMBER: P1298416
 CATALOG NUMBER: P3AS13R60W2N902765DE010 E3DL1LI_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93			93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85			85
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	80	79			79
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	75	73			73
5	91	82	76	71	89	81	75	71	79	74	70	78	73	70	76	72	69	68			68
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	72	68	64	63			63
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59			59
8	77	68	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55			55
9	74	64	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51			51
10	70	60	54	50	69	60	54	50	59	53	50	58	53	50	57	53	49	48			48

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	191498
5°	189698
10°	184165
15°	172532
20°	152707
25°	127749
30°	100117
35°	72625
40°	48319
45°	30112
50°	16307
55°	4702
60°	4386
65°	3995
70°	3975
75°	3897
80°	3915
85°	3774

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 30112 cd/sqm



TEST NUMBER: P1298416

CATALOG NUMBER: P3AS13R60W2N902765DE010 E3DL1LI_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.1	10.0
10°-20°	210.9	26.0
20°-30°	240.3	29.6
30°-40°	170.4	21.0
40°-50°	77.3	9.5
50°-60°	16.4	2.0
60°-70°	7.9	1.0
70°-80°	4.9	0.6
80°-90°	1.7	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	532.4	65.6
0°-40°	702.8	86.7
0°-60°	796.5	98.2
0°-90°	811.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	811.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	873	
5°	862	81
15°	760	211
25°	528	240
35°	271	170
45°	97	77
55°	12	16
65°	8	8
75°	5	5
85°	2	2
90°	0	



TEST NUMBER: P1298416
CATALOG NUMBER: P3AS13R60W2N902765DE010 E3DL1LI_5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	873.3
2.5°	870.2
5°	861.8
7.5°	847.1
10°	827.1
12.5°	798.6
15°	760.0
17.5°	711.5
20°	654.4
22.5°	592.8
25°	528.0
27.5°	461.7
30°	395.4
32.5°	332.2
35°	271.3
37.5°	217.4
40°	168.8
42.5°	128.0
45°	97.1
47.5°	72.5
50°	47.8
52.5°	22.4
55°	12.3
57.5°	10.8
60°	10.0
62.5°	9.2
65°	7.7
67.5°	6.9
70°	6.2
72.5°	5.4
75°	4.6
77.5°	3.9
80°	3.1
82.5°	2.3
85°	1.5
87.5°	0.8
90°	0.0

(END OF REPORT)