

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1298519

Luminaire Tested: P3AS13R65W2N902750DE010 E3CB1MW\_3000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1298519  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-44)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R65W2N902750DE010 E3CB1MW\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 3000K CCT AND, 90CRI ,  
E3CB1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 945.0 lumens  
Efficiency: N/A  
Efficacy: 76.8 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.9  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1298519  
CATALOG NUMBER: P3AS13R65W2N902750DE010 E3CB1MW\_3000K

### Luminous Intensity Polar Plot

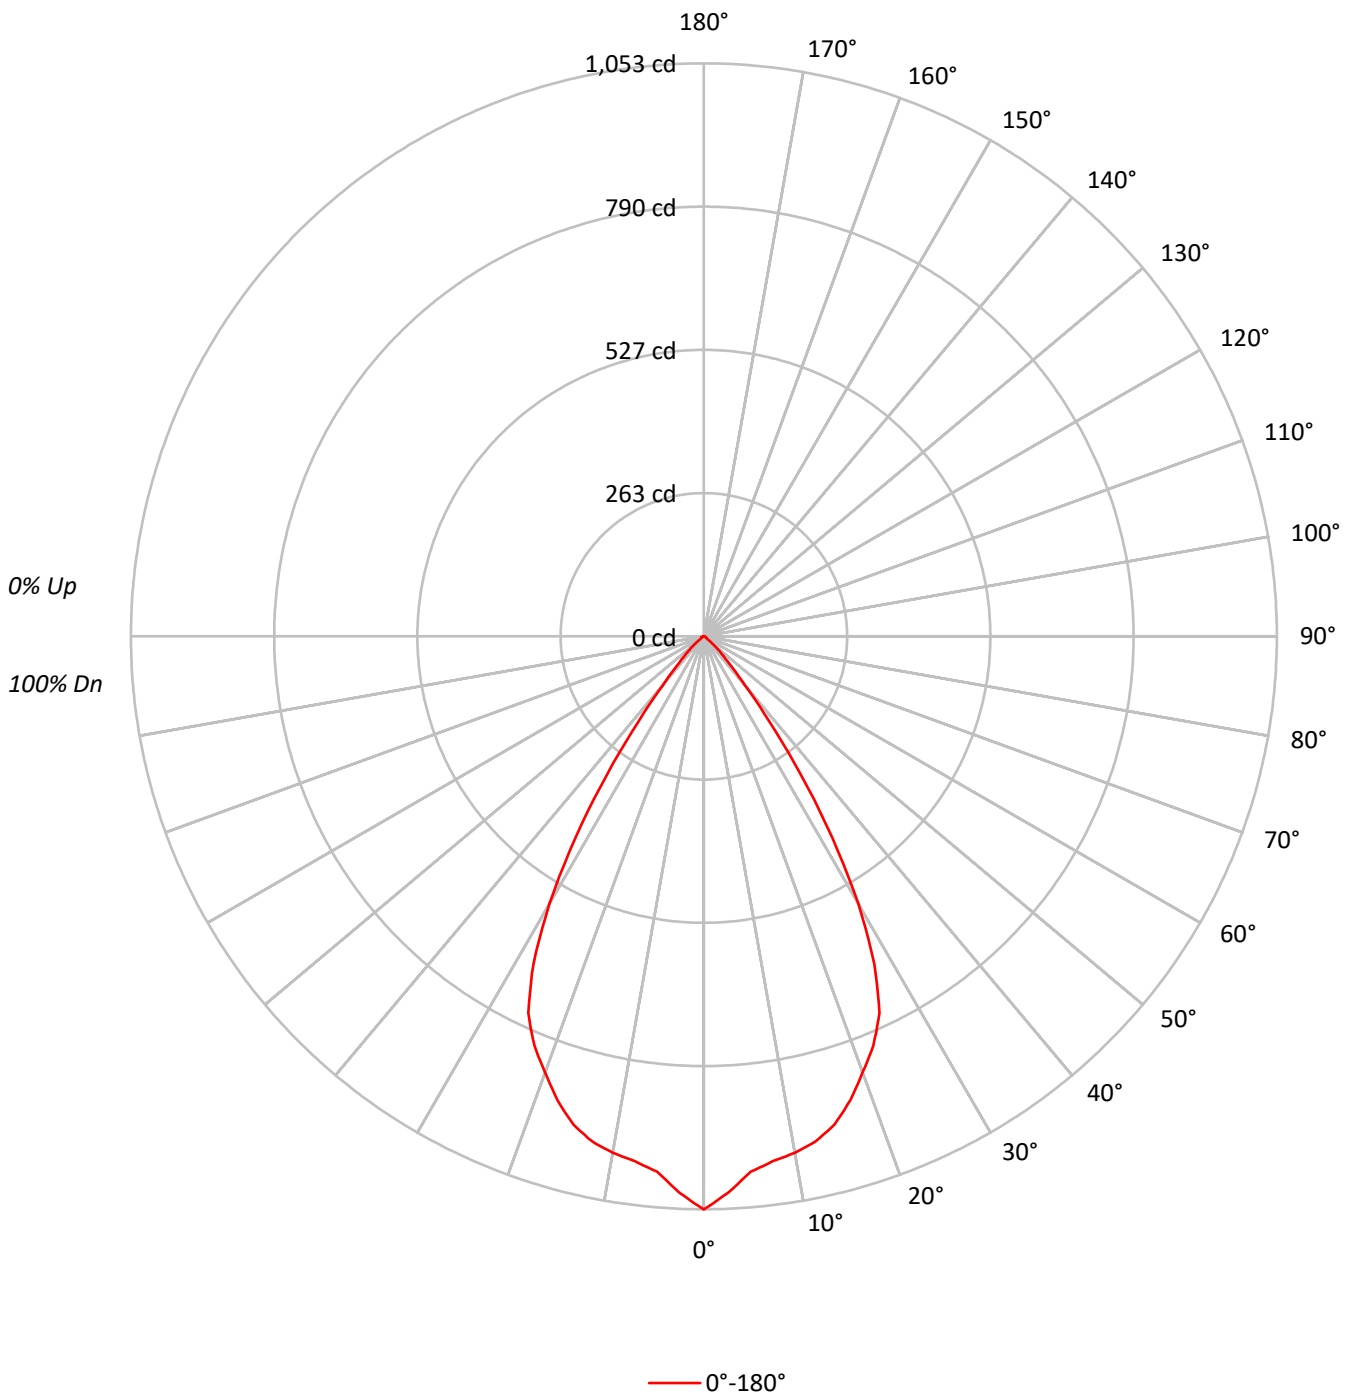



TEST NUMBER: P1298519  
 CATALOG NUMBER: P3AS13R65W2N902750DE010 E3CB1MW\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93	93	93	93
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87	87	87	87
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	87	85	83	81	81	81	81
4	97	90	84	80	96	89	84	80	87	82	79	85	81	78	83	80	77	75	75	75	75
5	93	84	78	74	91	83	78	74	82	77	73	80	76	73	78	75	72	70	70	70	70
6	88	79	73	69	86	78	73	69	77	72	68	75	71	68	74	70	67	66	66	66	66
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62	62	62	62
8	80	70	64	60	78	69	64	60	68	63	60	67	63	59	66	62	59	58	58	58	58
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54	54	54	54
10	72	63	57	53	71	62	57	53	61	56	53	60	56	53	60	55	52	51	51	51	51

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	230946
5°	217345
10°	214581
15°	210807
20°	199027
25°	184728
30°	143592
35°	83065
40°	33463
45°	15412
50°	6004
55°	2332
60°	2017
65°	1972
70°	1988
75°	1949
80°	1894
85°	2013

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 15412 cd/sqm



TEST NUMBER: P1298519

CATALOG NUMBER: P3AS13R65W2N902750DE010 E3CB1MW\_3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	93.9	9.9
10°-20°	259.3	27.4
20°-30°	339.4	35.9
30°-40°	196.6	20.8
40°-50°	42.1	4.5
50°-60°	6.8	0.7
60°-70°	3.8	0.4
70°-80°	2.2	0.2
80°-90°	0.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	692.6	73.3
0°-40°	889.2	94.1
0°-60°	938.2	99.3
0°-90°	945.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	945.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1053	
5°	987	94
15°	929	259
25°	764	339
35°	310	197
45°	50	42
55°	6	7
65°	4	4
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P1298519  
CATALOG NUMBER: P3AS13R65W2N902750DE010 E3CB1MW\_3000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1053.2
2.5°	1023.4
5°	987.4
7.5°	972.9
10°	963.7
12.5°	950.7
15°	928.6
17.5°	894.2
20°	852.9
22.5°	813.9
25°	763.5
27.5°	678.7
30°	567.1
32.5°	439.5
35°	310.3
37.5°	196.4
40°	116.9
42.5°	73.4
45°	49.7
47.5°	32.1
50°	17.6
52.5°	8.4
55°	6.1
57.5°	5.3
60°	4.6
62.5°	4.6
65°	3.8
67.5°	3.1
70°	3.1
72.5°	2.3
75°	2.3
77.5°	1.5
80°	1.5
82.5°	0.8
85°	0.8
87.5°	0.8
90°	0.0

(END OF REPORT)