

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1298586

Luminaire Tested: P3AS13R65W2N902750DE010 E3DL1WH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1298586
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-41)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R65W2N902750DE010 E3DL1WH_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 4000K CCT AND, 90CRI ,
E3DL1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 538.0 lumens
Efficiency: N/A
Efficacy: 43.7 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1298586
CATALOG NUMBER: P3AS13R65W2N902750DE010 E3DL1WH_4000K

Luminous Intensity Polar Plot

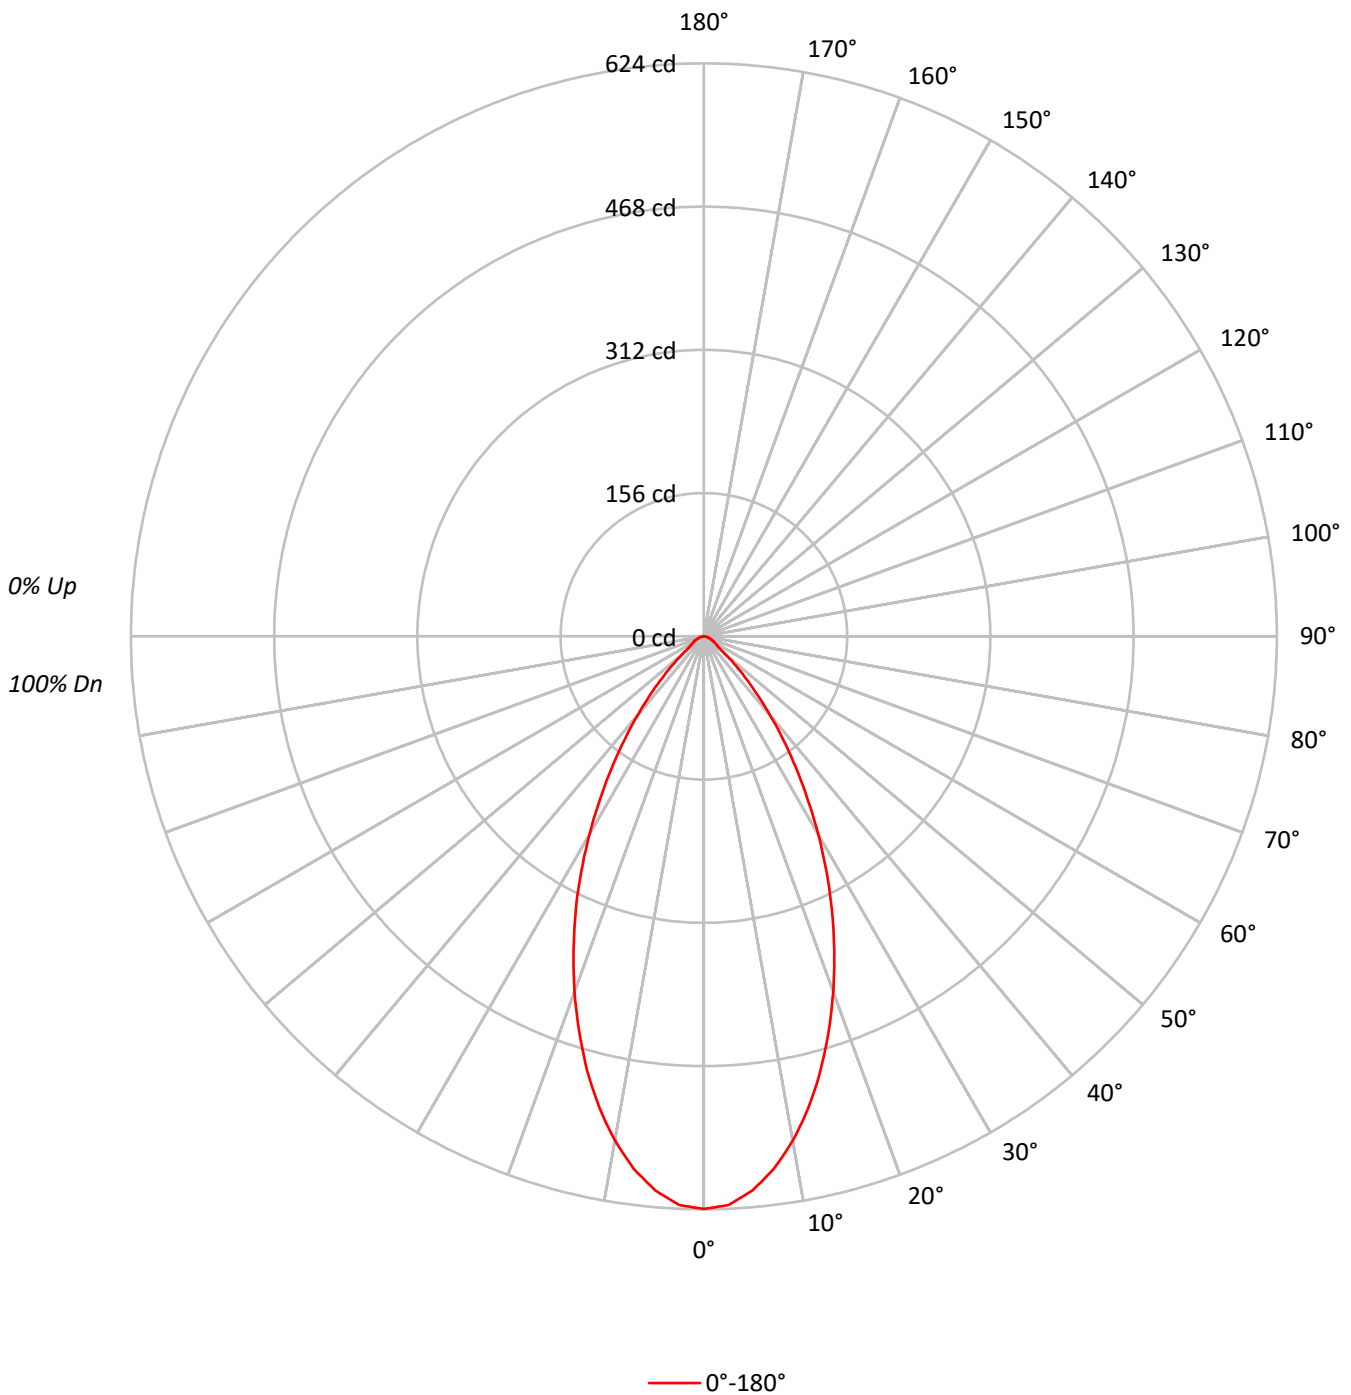



TEST NUMBER: P1298586

CATALOG NUMBER: P3AS13R65W2N902750DE010 E3DL1WH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | |
| RCR | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | | 100 |
| 1 | 113 | 110 | 107 | 105 | 110 | 108 | 105 | 103 | 104 | 102 | 100 | 100 | 98 | 97 | 96 | 95 | 94 | 92 | | | | 92 |
| 2 | 107 | 101 | 97 | 93 | 104 | 100 | 96 | 92 | 96 | 93 | 90 | 93 | 91 | 88 | 90 | 88 | 86 | 85 | | | | 85 |
| 3 | 101 | 94 | 88 | 84 | 99 | 92 | 87 | 83 | 90 | 85 | 82 | 87 | 84 | 81 | 85 | 82 | 79 | 78 | | | | 78 |
| 4 | 95 | 87 | 81 | 76 | 93 | 86 | 80 | 76 | 84 | 79 | 75 | 82 | 78 | 74 | 80 | 76 | 73 | 72 | | | | 72 |
| 5 | 90 | 81 | 75 | 70 | 88 | 80 | 74 | 70 | 78 | 73 | 69 | 77 | 72 | 69 | 75 | 71 | 68 | 66 | | | | 66 |
| 6 | 85 | 76 | 69 | 65 | 84 | 75 | 69 | 65 | 73 | 68 | 64 | 72 | 67 | 64 | 71 | 66 | 63 | 62 | | | | 62 |
| 7 | 81 | 71 | 65 | 60 | 79 | 70 | 64 | 60 | 69 | 64 | 60 | 68 | 63 | 59 | 67 | 62 | 59 | 57 | | | | 57 |
| 8 | 77 | 67 | 60 | 56 | 75 | 66 | 60 | 56 | 65 | 59 | 56 | 64 | 59 | 55 | 63 | 58 | 55 | 54 | | | | 54 |
| 9 | 73 | 63 | 57 | 52 | 72 | 62 | 56 | 52 | 61 | 56 | 52 | 60 | 55 | 52 | 59 | 55 | 52 | 50 | | | | 50 |
| 10 | 69 | 59 | 53 | 49 | 68 | 59 | 53 | 49 | 58 | 53 | 49 | 57 | 52 | 49 | 56 | 52 | 49 | 47 | | | | 47 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 136743 |
| 5° | 133348 |
| 10° | 124179 |
| 15° | 111283 |
| 20° | 96118 |
| 25° | 79940 |
| 30° | 63048 |
| 35° | 46712 |
| 40° | 32203 |
| 45° | 19971 |
| 50° | 10848 |
| 55° | 6805 |
| 60° | 5789 |
| 65° | 5241 |
| 70° | 4488 |
| 75° | 3982 |
| 80° | 3915 |
| 85° | 4026 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 19971 cd/sqm



TEST NUMBER: P1298586

CATALOG NUMBER: P3AS13R65W2N902750DE010 E3DL1WH_4000K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 56.3 | 10.5 |
| 10°-20° | 136.2 | 25.3 |
| 20°-30° | 150.6 | 28.0 |
| 30°-40° | 109.4 | 20.3 |
| 40°-50° | 51.3 | 9.5 |
| 50°-60° | 17.2 | 3.2 |
| 60°-70° | 10.0 | 1.9 |
| 70°-80° | 5.2 | 1.0 |
| 80°-90° | 1.7 | 0.3 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 343.2 | 63.8 |
| 0°-40° | 452.6 | 84.1 |
| 0°-60° | 521.1 | 96.9 |
| 0°-90° | 538.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 538.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 624 | |
| 5° | 606 | 56 |
| 15° | 490 | 136 |
| 25° | 330 | 151 |
| 35° | 174 | 109 |
| 45° | 64 | 51 |
| 55° | 18 | 17 |
| 65° | 10 | 10 |
| 75° | 5 | 5 |
| 85° | 2 | 2 |
| 90° | 0 | |



TEST NUMBER: P1298586
CATALOG NUMBER: P3AS13R65W2N902750DE010 E3DL1WH_4000K

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|-------|
| 0° | 623.6 |
| 2.5° | 619.8 |
| 5° | 605.8 |
| 7.5° | 584.8 |
| 10° | 557.7 |
| 12.5° | 525.9 |
| 15° | 490.2 |
| 17.5° | 451.4 |
| 20° | 411.9 |
| 22.5° | 370.8 |
| 25° | 330.4 |
| 27.5° | 289.3 |
| 30° | 249.0 |
| 32.5° | 210.2 |
| 35° | 174.5 |
| 37.5° | 141.9 |
| 40° | 112.5 |
| 42.5° | 86.1 |
| 45° | 64.4 |
| 47.5° | 46.5 |
| 50° | 31.8 |
| 52.5° | 21.7 |
| 55° | 17.8 |
| 57.5° | 15.5 |
| 60° | 13.2 |
| 62.5° | 11.6 |
| 65° | 10.1 |
| 67.5° | 8.5 |
| 70° | 7.0 |
| 72.5° | 6.2 |
| 75° | 4.7 |
| 77.5° | 3.9 |
| 80° | 3.1 |
| 82.5° | 2.3 |
| 85° | 1.6 |
| 87.5° | 0.8 |
| 90° | 0.0 |

(END OF REPORT)