

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1298694

Luminaire Tested: P3AS13R65W2N902765DE010 E3D1H_6500K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1298694
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R65W2N902765DE010 E3D1H_6500K
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 6500K CCT AND, 90CRI , E3D1H TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 920.1 lumens
Efficiency: N/A
Efficacy: 74.8 lumens/watt
Spacing Criteria (0/90/45): 0.92 / 0.92 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 12.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1298694
CATALOG NUMBER: P3AS13R65W2N902765DE010 E3D1H_6500K

Luminous Intensity Polar Plot

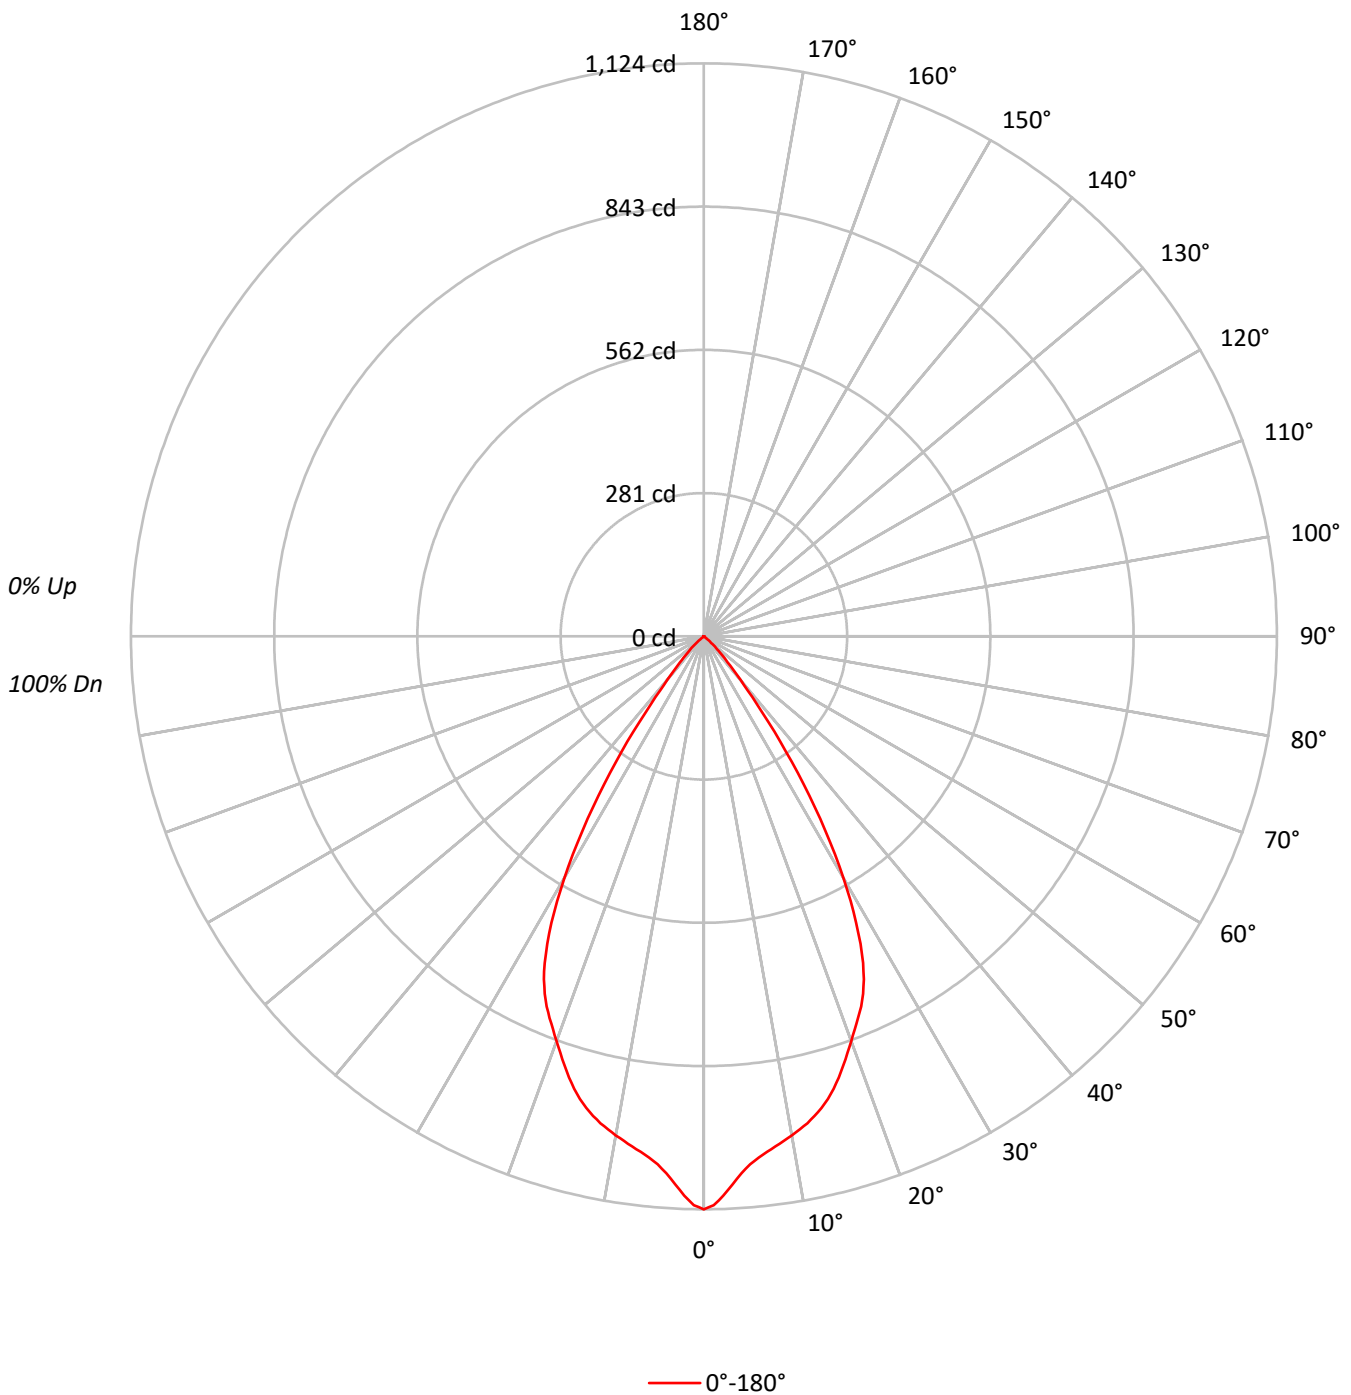



TEST NUMBER: P1298694

CATALOG NUMBER: P3AS13R65W2N902765DE010 E3D1H_6500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.1	10.7
10°-20°	261.8	28.5
20°-30°	331.4	36.0
30°-40°	188.7	20.5
40°-50°	37.5	4.1
50°-60°	2.0	0.2
60°-70°	0.5	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	691.3	75.1
0°-40°	880.0	95.6
0°-60°	919.5	99.9
0°-90°	920.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	920.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1124	
5°	1040	98
15°	940	262
25°	743	331
35°	301	189
45°	44	38
55°	1	2
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1298694

CATALOG NUMBER: P3AS13R65W2N902765DE010 E3D1H_6500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1124.2
1°	1115.9
2°	1097.8
3°	1076.6
4°	1055.8
5°	1039.9
6°	1028.2
7°	1018.7
8°	1010.4
9°	1002.1
10°	994.1
11°	985.4
12°	976.4
13°	965.4
14°	953.7
15°	939.7
16°	923.0
17°	904.9
18°	885.2
19°	864.4
20°	845.2
21°	825.5
22°	807.7
23°	789.2
24°	767.6
25°	742.7
26°	712.8
27°	676.9
28°	636.4
29°	593.3
30°	548.3
31°	498.8
32°	449.6
32.5°	424.3
33°	399.7
34°	349.8
35°	300.6
36°	255.2
37°	210.2
37.5°	187.2
38°	168.7
39°	136.5
40°	111.6
42.5°	68.8
45°	43.9



TEST NUMBER: P1298694

CATALOG NUMBER: P3AS13R65W2N902765DE010 E3D1H_6500K

CANDELA DISTRIBUTION (continued):

	0°
47.5°	25.7
50°	9.5
52.5°	1.9
55°	1.1
57.5°	0.8
60°	0.8
62.5°	0.8
65°	0.4
67.5°	0.4
70°	0.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)