

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1298960

Luminaire Tested: P3AS13R70W2N902765DE010 E3CB1MMS\_3500K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1298960  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-48)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R70W2N902765DE010 E3CB1MMS\_3500K  
Description: 3in Adjustable Tunable White LED luminaire with, R70 optic, 3500K CCT AND, 90CRI ,  
E3CB1MMS TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 970.0 lumens  
Efficiency: N/A  
Efficacy: 78.9 lumens/watt  
Spacing Criteria (0/90/45): 1.01 / 1.01 / 1.03  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 12.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1298960  
CATALOG NUMBER: P3AS13R70W2N902765DE010 E3CB1MMS\_3500K

### Luminous Intensity Polar Plot

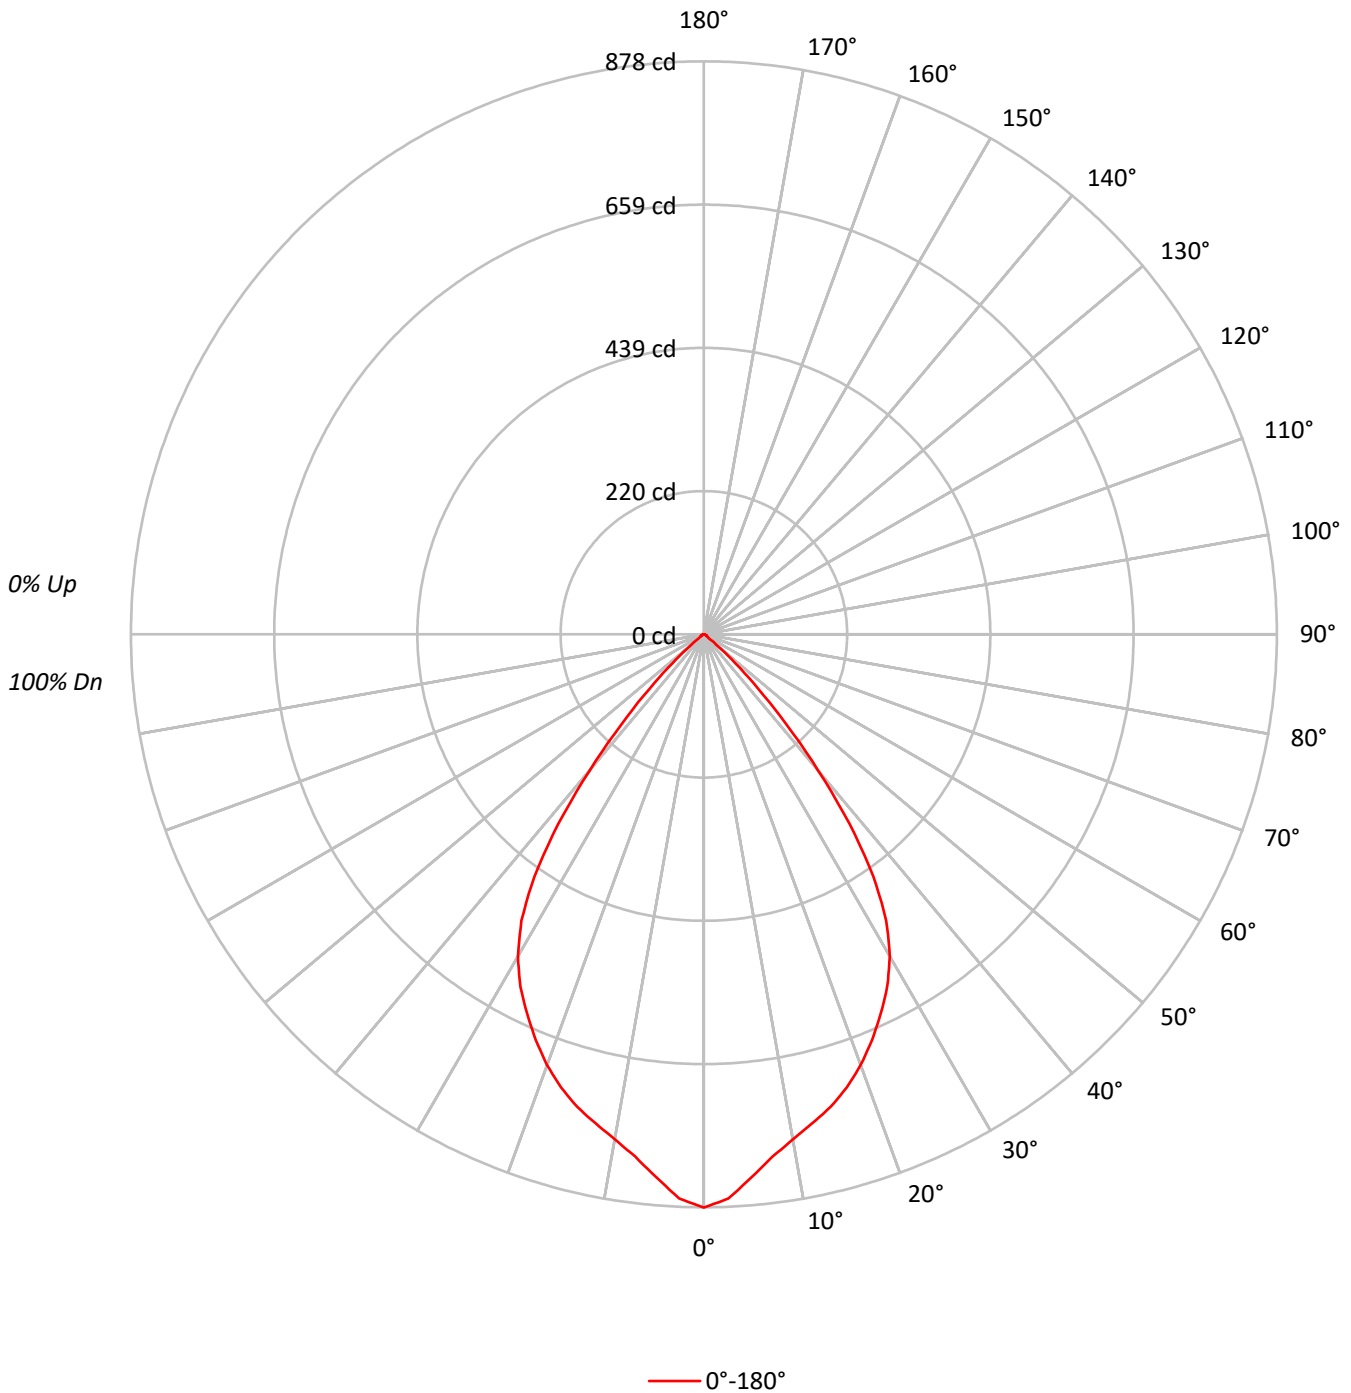



TEST NUMBER: P1298960  
 CATALOG NUMBER: P3AS13R70W2N902765DE010 E3CB1MMS\_3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     | 0  |    |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |
| 1   | 113 | 110 | 107 | 105 | 111 | 108 | 106 | 103 | 104 | 102 | 100 | 100 | 99  | 97  | 97  | 96  | 94  | 93  |    |    |
| 2   | 107 | 102 | 97  | 94  | 105 | 100 | 96  | 93  | 97  | 94  | 91  | 94  | 91  | 89  | 91  | 89  | 87  | 85  |    |    |
| 3   | 101 | 94  | 89  | 85  | 99  | 93  | 88  | 84  | 90  | 86  | 83  | 88  | 84  | 81  | 85  | 82  | 80  | 78  |    |    |
| 4   | 95  | 87  | 81  | 77  | 94  | 86  | 81  | 76  | 84  | 79  | 75  | 82  | 78  | 75  | 80  | 77  | 74  | 72  |    |    |
| 5   | 90  | 81  | 75  | 70  | 88  | 80  | 74  | 70  | 78  | 73  | 69  | 77  | 72  | 69  | 75  | 71  | 68  | 66  |    |    |
| 6   | 85  | 75  | 69  | 64  | 83  | 75  | 69  | 64  | 73  | 68  | 64  | 72  | 67  | 63  | 70  | 66  | 63  | 61  |    |    |
| 7   | 80  | 70  | 64  | 59  | 79  | 70  | 64  | 59  | 68  | 63  | 59  | 67  | 62  | 59  | 66  | 62  | 58  | 57  |    |    |
| 8   | 76  | 66  | 59  | 55  | 75  | 65  | 59  | 55  | 64  | 58  | 55  | 63  | 58  | 54  | 62  | 57  | 54  | 53  |    |    |
| 9   | 72  | 62  | 55  | 51  | 71  | 61  | 55  | 51  | 60  | 55  | 51  | 59  | 54  | 50  | 58  | 54  | 50  | 49  |    |    |
| 10  | 68  | 58  | 52  | 47  | 67  | 57  | 51  | 47  | 56  | 51  | 47  | 56  | 51  | 47  | 55  | 50  | 47  | 46  |    |    |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 192616 |
| 5°  | 183799 |
| 10° | 174880 |
| 15° | 170194 |
| 20° | 163908 |
| 25° | 155138 |
| 30° | 144275 |
| 35° | 121211 |
| 40° | 78118  |
| 45° | 36314  |
| 50° | 9518   |
| 55° | 2370   |
| 60° | 2368   |
| 65° | 2024   |
| 70° | 1988   |
| 75° | 1949   |
| 80° | 2020   |
| 85° | 2013   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 36314 cd/sqm



TEST NUMBER: P1298960  
 CATALOG NUMBER: P3AS13R70W2N902765DE010 E3CB1MMS\_3500K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 78.2   | 8.1       |
| 10°-20°   | 210.7  | 21.7      |
| 20°-30°   | 294.3  | 30.3      |
| 30°-40°   | 272.9  | 28.1      |
| 40°-50°   | 97.8   | 10.1      |
| 50°-60°   | 8.3    | 0.9       |
| 60°-70°   | 4.1    | 0.4       |
| 70°-80°   | 2.7    | 0.3       |
| 80°-90°   | 1.1    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 583.1  | 60.1      |
| 0°-40°    | 856.0  | 88.2      |
| 0°-60°    | 962.2  | 99.2      |
| 0°-90°    | 970.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 970.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 878 |      |
| 5°  | 835 | 78   |
| 15° | 750 | 211  |
| 25° | 641 | 294  |
| 35° | 453 | 273  |
| 45° | 117 | 98   |
| 55° | 6   | 8    |
| 65° | 4   | 4    |
| 75° | 2   | 3    |
| 85° | 1   | 1    |
| 90° | 0   |      |



TEST NUMBER: P1298960  
CATALOG NUMBER: P3AS13R70W2N902765DE010 E3CB1MMS\_3500K

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 878.4 |
| 2.5°  | 865.2 |
| 5°    | 835.0 |
| 7.5°  | 807.1 |
| 10°   | 785.4 |
| 12.5° | 767.5 |
| 15°   | 749.7 |
| 17.5° | 728.0 |
| 20°   | 702.4 |
| 22.5° | 672.9 |
| 25°   | 641.2 |
| 27.5° | 608.6 |
| 30°   | 569.8 |
| 32.5° | 520.2 |
| 35°   | 452.8 |
| 37.5° | 366.7 |
| 40°   | 272.9 |
| 42.5° | 186.1 |
| 45°   | 117.1 |
| 47.5° | 65.1  |
| 50°   | 27.9  |
| 52.5° | 9.3   |
| 55°   | 6.2   |
| 57.5° | 5.4   |
| 60°   | 5.4   |
| 62.5° | 4.7   |
| 65°   | 3.9   |
| 67.5° | 3.9   |
| 70°   | 3.1   |
| 72.5° | 3.1   |
| 75°   | 2.3   |
| 77.5° | 2.3   |
| 80°   | 1.6   |
| 82.5° | 1.6   |
| 85°   | 0.8   |
| 87.5° | 0.8   |
| 90°   | 0.0   |

(END OF REPORT)