

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299184

Luminaire Tested: P3AS17R15W2N902750DE010 E3DL1WMH_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1299184
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R15W2N902750DE010 E3DL1WMH_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 3500K CCT AND, 90CRI ,
E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1258.0 lumens
Efficiency: N/A
Efficacy: 64.8 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1299184
CATALOG NUMBER: P3AS17R15W2N902750DE010 E3DL1WMH_3500K

Luminous Intensity Polar Plot

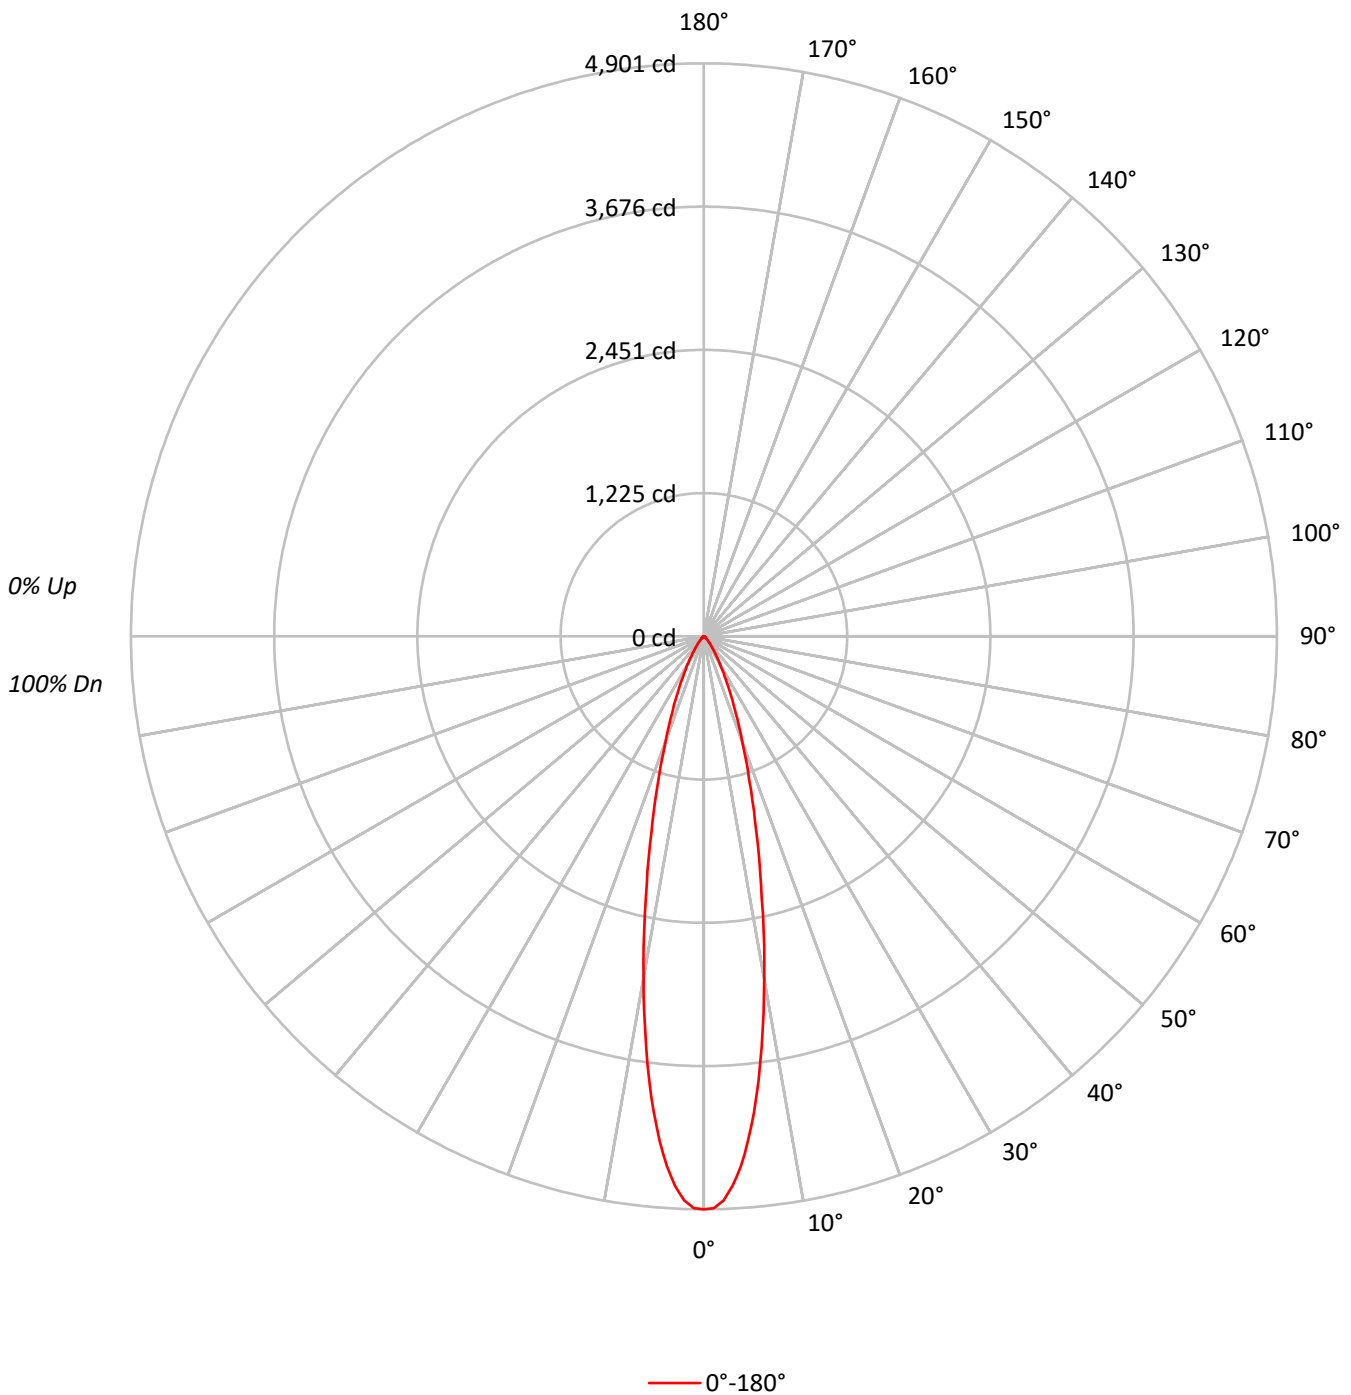



TEST NUMBER: P1299184
 CATALOG NUMBER: P3AS17R15W2N902750DE010 E3DL1WMH_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 |
| RCR | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | |
| 1 | 114 | 112 | 110 | 108 | 112 | 110 | 108 | 106 | 106 | 104 | 103 | 102 | 101 | 100 | 99 | 98 | 97 | 95 | | |
| 2 | 110 | 106 | 103 | 100 | 108 | 104 | 101 | 99 | 101 | 99 | 97 | 98 | 96 | 95 | 96 | 94 | 93 | 91 | | |
| 3 | 106 | 101 | 97 | 93 | 104 | 99 | 96 | 93 | 97 | 94 | 91 | 94 | 92 | 90 | 92 | 90 | 88 | 87 | | |
| 4 | 102 | 96 | 92 | 88 | 100 | 95 | 91 | 88 | 93 | 89 | 87 | 91 | 88 | 86 | 89 | 87 | 85 | 83 | | |
| 5 | 98 | 92 | 87 | 84 | 97 | 91 | 87 | 83 | 89 | 85 | 83 | 88 | 84 | 82 | 86 | 83 | 81 | 80 | | |
| 6 | 95 | 88 | 83 | 80 | 94 | 87 | 83 | 80 | 86 | 82 | 79 | 85 | 81 | 79 | 83 | 80 | 78 | 77 | | |
| 7 | 92 | 85 | 80 | 77 | 91 | 84 | 80 | 76 | 83 | 79 | 76 | 82 | 78 | 76 | 81 | 78 | 75 | 74 | | |
| 8 | 89 | 81 | 77 | 74 | 88 | 81 | 77 | 73 | 80 | 76 | 73 | 79 | 75 | 73 | 78 | 75 | 73 | 72 | | |
| 9 | 86 | 79 | 74 | 71 | 85 | 78 | 74 | 71 | 77 | 73 | 71 | 77 | 73 | 70 | 76 | 73 | 70 | 69 | | |
| 10 | 84 | 76 | 71 | 68 | 83 | 76 | 71 | 68 | 75 | 71 | 68 | 74 | 71 | 68 | 74 | 70 | 68 | 67 | | |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|---------|
| | 0° |
| 0° | 1074673 |
| 5° | 953927 |
| 10° | 662468 |
| 15° | 391762 |
| 20° | 223133 |
| 25° | 127556 |
| 30° | 70568 |
| 35° | 37638 |
| 40° | 20810 |
| 45° | 11288 |
| 50° | 7027 |
| 55° | 5543 |
| 60° | 4780 |
| 65° | 4410 |
| 70° | 3911 |
| 75° | 4067 |
| 80° | 3031 |
| 85° | 3019 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 11288 cd/sqm



TEST NUMBER: P1299184

CATALOG NUMBER: P3AS17R15W2N902750DE010 E3DL1WMH_3500K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 368.5 | 29.3 |
| 10°-20° | 486.4 | 38.7 |
| 20°-30° | 250.4 | 19.9 |
| 30°-40° | 94.0 | 7.5 |
| 40°-50° | 30.8 | 2.4 |
| 50°-60° | 13.2 | 1.1 |
| 60°-70° | 8.4 | 0.7 |
| 70°-80° | 4.9 | 0.4 |
| 80°-90° | 1.3 | 0.1 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1105.3 | 87.9 |
| 0°-40° | 1199.3 | 95.3 |
| 0°-60° | 1243.4 | 98.8 |
| 0°-90° | 1258.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1258.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 4901 | |
| 5° | 4334 | 369 |
| 15° | 1726 | 486 |
| 25° | 527 | 250 |
| 35° | 141 | 94 |
| 45° | 36 | 31 |
| 55° | 14 | 13 |
| 65° | 8 | 8 |
| 75° | 5 | 5 |
| 85° | 1 | 1 |
| 90° | 0 | |



TEST NUMBER: P1299184
CATALOG NUMBER: P3AS17R15W2N902750DE010 E3DL1WMH_3500K

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 4900.9 |
| 1° | 4891.2 |
| 2° | 4826.9 |
| 3° | 4704.5 |
| 4° | 4543.3 |
| 5° | 4333.7 |
| 6° | 4096.2 |
| 7° | 3835.6 |
| 8° | 3546.0 |
| 9° | 3260.0 |
| 10° | 2975.2 |
| 12.5° | 2289.2 |
| 15° | 1725.7 |
| 17.5° | 1291.9 |
| 20° | 956.2 |
| 22.5° | 713.8 |
| 25° | 527.2 |
| 27.5° | 384.2 |
| 30° | 278.7 |
| 32.5° | 197.5 |
| 35° | 140.6 |
| 37.5° | 100.6 |
| 40° | 72.7 |
| 42.5° | 52.1 |
| 45° | 36.4 |
| 47.5° | 26.7 |
| 50° | 20.6 |
| 52.5° | 17.0 |
| 55° | 14.5 |
| 57.5° | 12.1 |
| 60° | 10.9 |
| 62.5° | 9.7 |
| 65° | 8.5 |
| 67.5° | 7.3 |
| 70° | 6.1 |
| 72.5° | 6.1 |
| 75° | 4.8 |
| 77.5° | 3.6 |
| 80° | 2.4 |
| 82.5° | 2.4 |
| 85° | 1.2 |
| 87.5° | 0.0 |
| 90° | 0.0 |

(END OF REPORT)