

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299190

Luminaire Tested: P3AS17R15W2N902750DE010 E3DLD1GPH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1299190
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R15W2N902750DE010 E3DLD1GPH_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 4000K CCT AND, 90CRI ,
E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 469.0 lumens
Efficiency: N/A
Efficacy: 24.2 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1299190
CATALOG NUMBER: P3AS17R15W2N902750DE010 E3DLD1GPH_4000K

Luminous Intensity Polar Plot

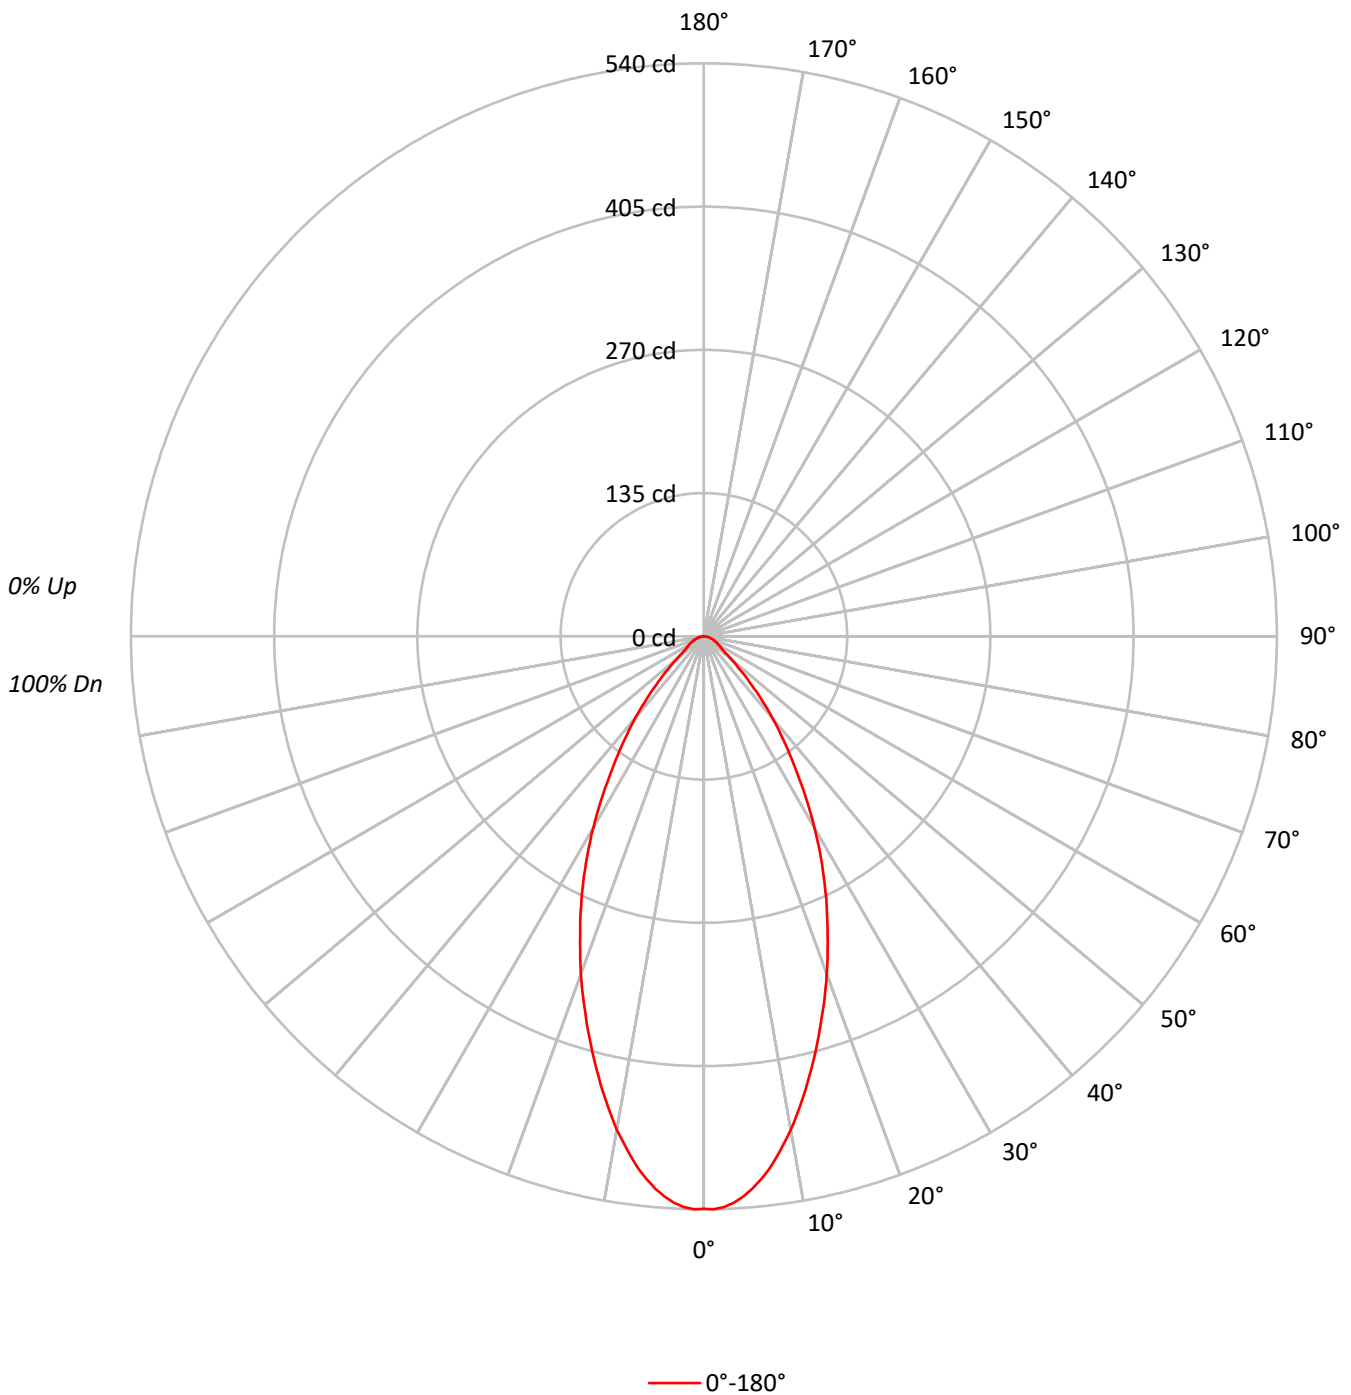



TEST NUMBER: P1299190
 CATALOG NUMBER: P3AS17R15W2N902750DE010 E3DLD1GPH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	109	106	104	110	107	105	102	103	101	99	99	98	96	96	95	93	91			
2	106	100	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83			
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70			
5	89	80	73	68	87	79	73	68	77	72	67	75	71	67	74	69	66	65			
6	84	74	68	63	83	73	67	63	72	66	62	70	66	62	69	65	61	60			
7	80	69	63	58	78	69	63	58	67	62	58	66	61	57	65	61	57	56			
8	76	65	59	54	74	65	58	54	63	58	54	62	57	54	61	57	53	52			
9	72	61	55	51	71	61	55	51	60	54	50	59	54	50	58	53	50	49			
10	68	58	52	48	67	57	51	47	57	51	47	56	51	47	55	50	47	46			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	118302
5°	115100
10°	105164
15°	92123
20°	79037
25°	65980
30°	52793
35°	39592
40°	28740
45°	18793
50°	11769
55°	7952
60°	7017
65°	6486
70°	6091
75°	5507
80°	5304
85°	4529

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 18793 cd/sqm



TEST NUMBER: P1299190
 CATALOG NUMBER: P3AS17R15W2N902750DE010 E3DLD1GPH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	48.2	10.3
10°-20°	113.1	24.1
20°-30°	124.6	26.6
30°-40°	93.3	19.9
40°-50°	48.3	10.3
50°-60°	20.0	4.3
60°-70°	12.4	2.6
70°-80°	6.9	1.5
80°-90°	2.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	285.9	61.0
0°-40°	379.2	80.9
0°-60°	447.6	95.4
0°-90°	469.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	469.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	540	
5°	523	48
15°	406	113
25°	273	125
35°	148	93
45°	61	48
55°	21	20
65°	12	12
75°	6	7
85°	2	2
90°	0	



TEST NUMBER: P1299190
CATALOG NUMBER: P3AS17R15W2N902750DE010 E3DLD1GPH_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	539.5
1°	540.1
2°	538.3
3°	534.7
4°	529.4
5°	522.9
6°	514.5
7°	505.6
8°	494.9
9°	483.6
10°	472.3
12.5°	439.7
15°	405.8
17.5°	371.9
20°	338.7
22.5°	304.8
25°	272.7
27.5°	240.6
30°	208.5
32.5°	177.1
35°	147.9
37.5°	123.0
40°	100.4
42.5°	79.6
45°	60.6
47.5°	45.7
50°	34.5
52.5°	25.5
55°	20.8
57.5°	18.4
60°	16.0
62.5°	14.3
65°	12.5
67.5°	10.7
70°	9.5
72.5°	7.7
75°	6.5
77.5°	5.3
80°	4.2
82.5°	3.0
85°	1.8
87.5°	0.6
90°	0.0

(END OF REPORT)