

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299210

Luminaire Tested: P3AS17R15W2N902750DE010 E3DLD1WH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1299210
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R15W2N902750DE010 E3DLD1WH_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 4000K CCT AND, 90CRI ,
E3DLD1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 957.0 lumens
Efficiency: N/A
Efficacy: 49.3 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1299210
CATALOG NUMBER: P3AS17R15W2N902750DE010 E3DLD1WH_4000K

Luminous Intensity Polar Plot

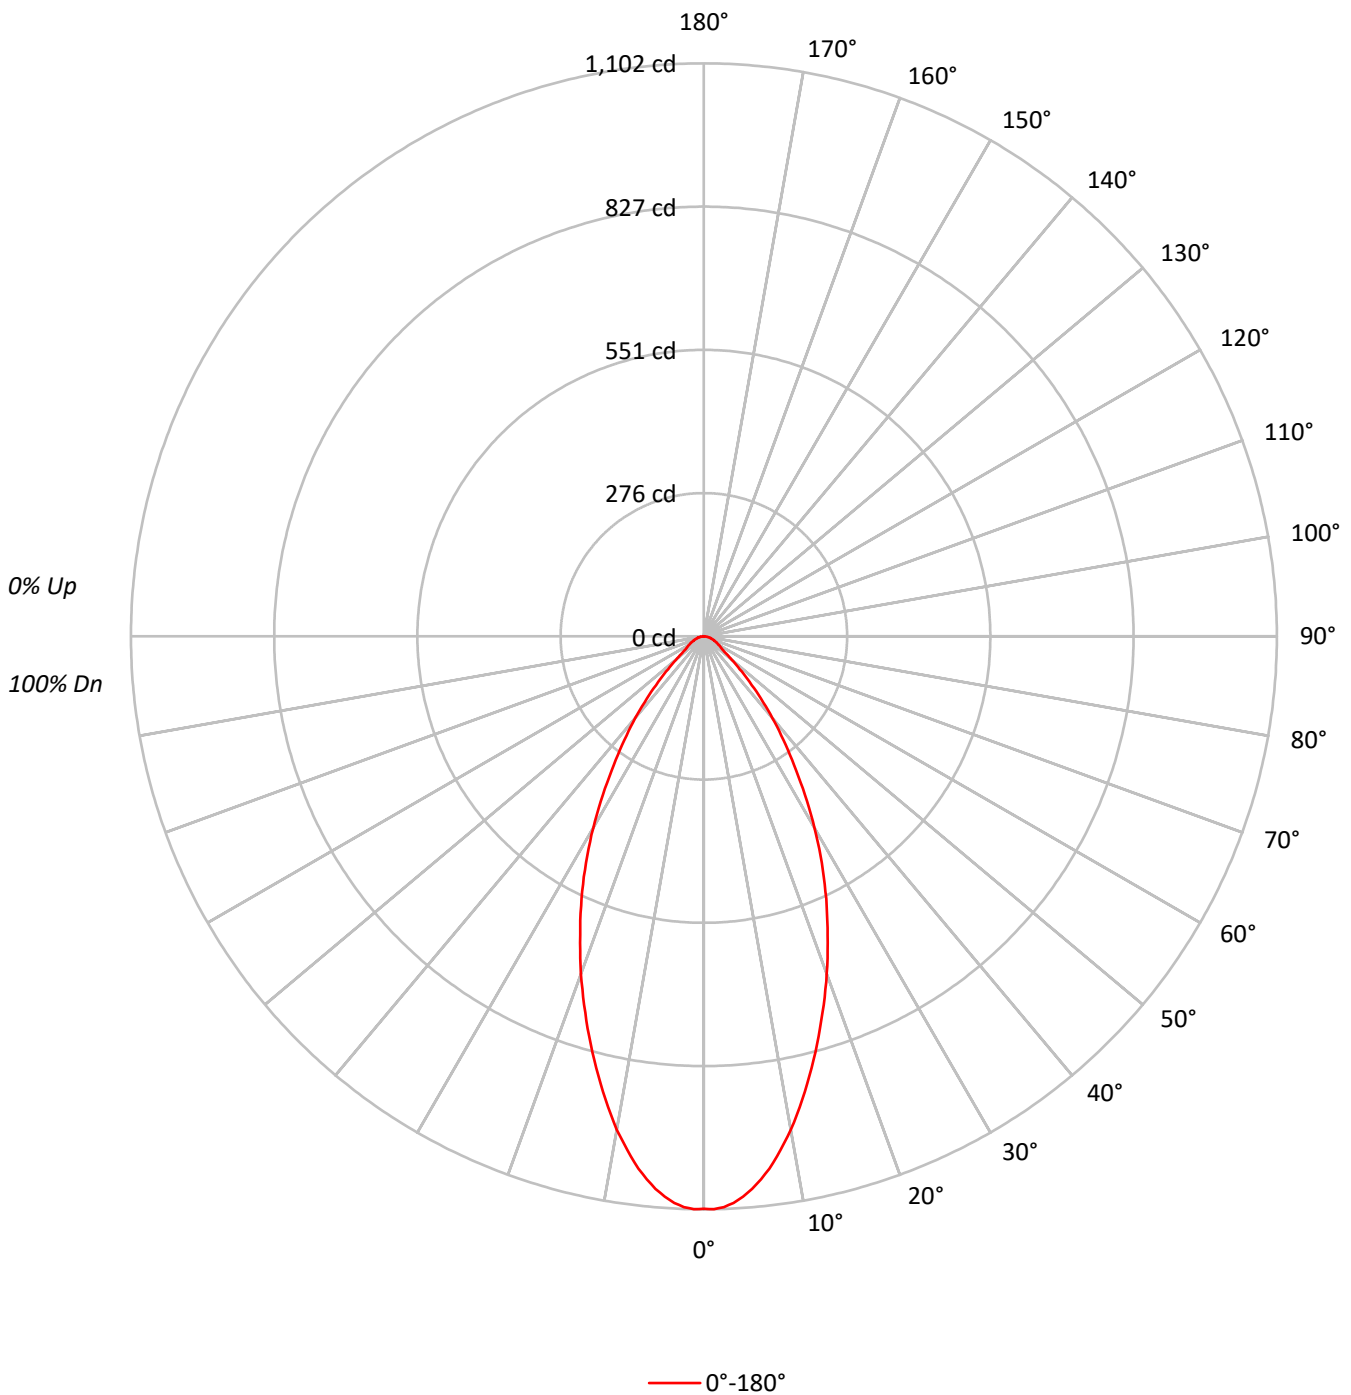



TEST NUMBER: P1299210
 CATALOG NUMBER: P3AS17R15W2N902750DE010 E3DLD1WH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.4	10.3
10°-20°	230.7	24.1
20°-30°	254.2	26.6
30°-40°	190.4	19.9
40°-50°	98.7	10.3
50°-60°	40.9	4.3
60°-70°	25.3	2.6
70°-80°	14.2	1.5
80°-90°	4.1	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	583.4	61.0
0°-40°	773.7	80.9
0°-60°	913.3	95.4
0°-90°	957.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	957.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1101	
5°	1067	98
15°	828	231
25°	556	254
35°	302	190
45°	124	99
55°	42	41
65°	26	25
75°	13	14
85°	4	4
90°	0	



TEST NUMBER: P1299210
CATALOG NUMBER: P3AS17R15W2N902750DE010 E3DLD1WH_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1100.8
1°	1102.0
2°	1098.4
3°	1091.1
4°	1080.2
5°	1066.9
6°	1049.9
7°	1031.7
8°	1009.9
9°	986.9
10°	963.8
12.5°	897.2
15°	828.0
17.5°	758.9
20°	691.0
22.5°	621.9
25°	556.5
27.5°	491.0
30°	425.5
32.5°	361.3
35°	301.9
37.5°	251.0
40°	204.9
42.5°	162.5
45°	123.7
47.5°	93.4
50°	70.3
52.5°	52.1
55°	42.4
57.5°	37.6
60°	32.7
62.5°	29.1
65°	25.5
67.5°	21.8
70°	19.4
72.5°	15.8
75°	13.3
77.5°	10.9
80°	8.5
82.5°	6.1
85°	3.6
87.5°	1.2
90°	0.0

(END OF REPORT)