

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299242

Luminaire Tested: P3AS17R15W2N902750DE010 E3DLP1WMH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1299242
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-1)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R15W2N902750DE010 E3DLP1WMH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 2700K CCT AND, 90CRI ,
E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 667.0 lumens
Efficiency: N/A
Efficacy: 34.4 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.61
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1299242
CATALOG NUMBER: P3AS17R15W2N902750DE010 E3DLP1WMH_2700K

Luminous Intensity Polar Plot

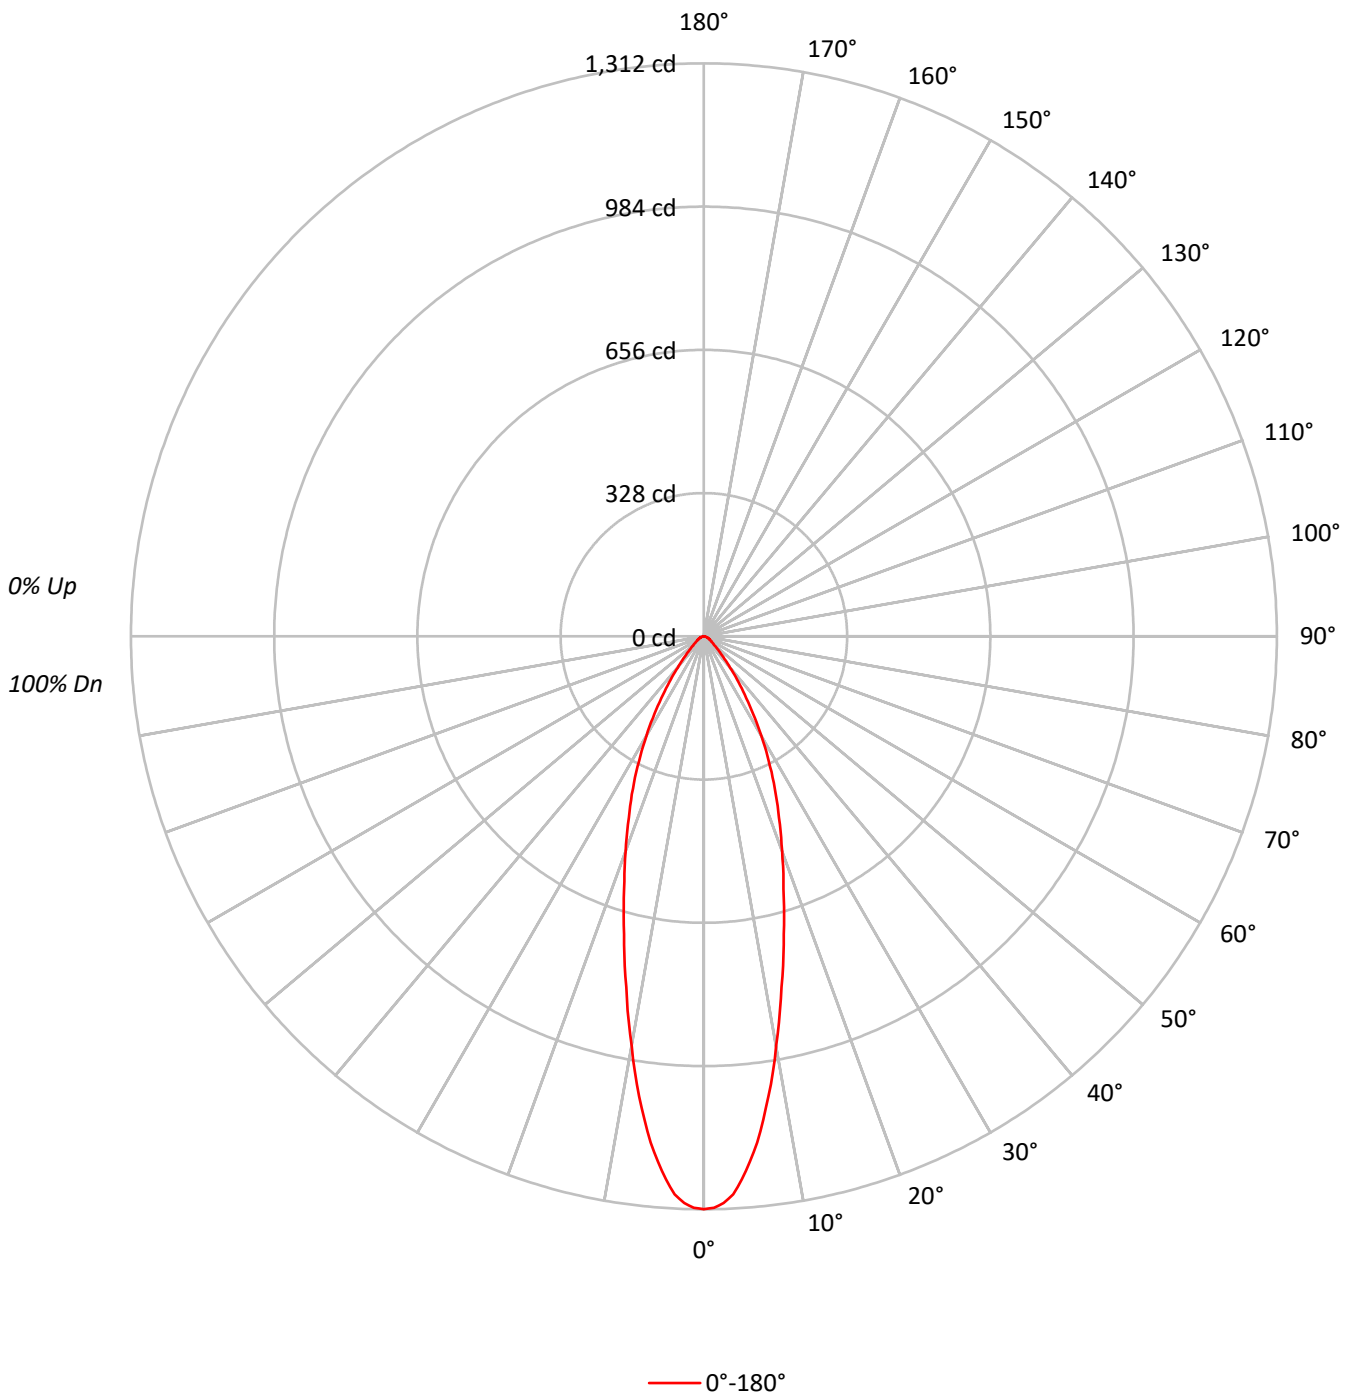



TEST NUMBER: P1299242

CATALOG NUMBER: P3AS17R15W2N902750DE010 E3DLP1WMH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 | 100 |
| 1 | 113 | 110 | 108 | 106 | 111 | 108 | 106 | 104 | 104 | 102 | 101 | 100 | 99 | 98 | 97 | 96 | 95 | 93 | 93 | 93 | 93 |
| 2 | 108 | 103 | 98 | 95 | 105 | 101 | 97 | 94 | 98 | 95 | 92 | 95 | 92 | 90 | 92 | 90 | 88 | 86 | 86 | 86 | 86 |
| 3 | 102 | 96 | 91 | 87 | 100 | 94 | 90 | 86 | 92 | 88 | 85 | 89 | 86 | 83 | 87 | 84 | 82 | 80 | 80 | 80 | 80 |
| 4 | 97 | 90 | 84 | 80 | 95 | 88 | 83 | 79 | 86 | 82 | 78 | 84 | 81 | 78 | 82 | 79 | 77 | 75 | 75 | 75 | 75 |
| 5 | 93 | 84 | 78 | 74 | 91 | 83 | 78 | 74 | 81 | 77 | 73 | 80 | 76 | 72 | 78 | 75 | 72 | 70 | 70 | 70 | 70 |
| 6 | 88 | 79 | 73 | 69 | 87 | 79 | 73 | 69 | 77 | 72 | 69 | 76 | 71 | 68 | 74 | 71 | 68 | 66 | 66 | 66 | 66 |
| 7 | 84 | 75 | 69 | 65 | 83 | 74 | 69 | 65 | 73 | 68 | 64 | 72 | 67 | 64 | 71 | 67 | 64 | 62 | 62 | 62 | 62 |
| 8 | 80 | 71 | 65 | 61 | 79 | 71 | 65 | 61 | 69 | 64 | 61 | 68 | 64 | 61 | 67 | 63 | 60 | 59 | 59 | 59 | 59 |
| 9 | 77 | 68 | 62 | 58 | 76 | 67 | 62 | 58 | 66 | 61 | 58 | 65 | 61 | 57 | 64 | 60 | 57 | 56 | 56 | 56 | 56 |
| 10 | 74 | 64 | 59 | 55 | 73 | 64 | 59 | 55 | 63 | 58 | 55 | 62 | 58 | 55 | 62 | 57 | 54 | 53 | 53 | 53 | 53 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 287630 |
| 5° | 265837 |
| 10° | 212243 |
| 15° | 160319 |
| 20° | 122091 |
| 25° | 93030 |
| 30° | 66643 |
| 35° | 43500 |
| 40° | 26650 |
| 45° | 16126 |
| 50° | 10712 |
| 55° | 8296 |
| 60° | 7105 |
| 65° | 6174 |
| 70° | 5578 |
| 75° | 5507 |
| 80° | 4041 |
| 85° | 2768 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 16126 cd/sqm



TEST NUMBER: P1299242

CATALOG NUMBER: P3AS17R15W2N902750DE010 E3DLP1WMH_2700K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 107.0 | 16.0 |
| 10°-20° | 197.4 | 29.6 |
| 20°-30° | 175.7 | 26.3 |
| 30°-40° | 104.0 | 15.6 |
| 40°-50° | 42.7 | 6.4 |
| 50°-60° | 20.0 | 3.0 |
| 60°-70° | 12.2 | 1.8 |
| 70°-80° | 6.4 | 1.0 |
| 80°-90° | 1.6 | 0.2 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 480.1 | 72.0 |
| 0°-40° | 584.1 | 87.6 |
| 0°-60° | 646.8 | 97.0 |
| 0°-90° | 667.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 667.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 1312 | |
| 5° | 1208 | 107 |
| 15° | 706 | 197 |
| 25° | 384 | 176 |
| 35° | 162 | 104 |
| 45° | 52 | 43 |
| 55° | 22 | 20 |
| 65° | 12 | 12 |
| 75° | 6 | 6 |
| 85° | 1 | 2 |
| 90° | 0 | |



TEST NUMBER: P1299242

CATALOG NUMBER: P3AS17R15W2N902750DE010 E3DLP1WMH_2700K

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 1311.7 |
| 1° | 1308.4 |
| 2° | 1298.7 |
| 3° | 1279.2 |
| 4° | 1246.7 |
| 5° | 1207.7 |
| 6° | 1165.5 |
| 7° | 1115.6 |
| 8° | 1063.6 |
| 9° | 1010.6 |
| 10° | 953.2 |
| 12.5° | 822.1 |
| 15° | 706.2 |
| 17.5° | 606.6 |
| 20° | 523.2 |
| 22.5° | 449.5 |
| 25° | 384.5 |
| 27.5° | 321.7 |
| 30° | 263.2 |
| 32.5° | 210.1 |
| 35° | 162.5 |
| 37.5° | 124.6 |
| 40° | 93.1 |
| 42.5° | 69.3 |
| 45° | 52.0 |
| 47.5° | 40.1 |
| 50° | 31.4 |
| 52.5° | 26.0 |
| 55° | 21.7 |
| 57.5° | 18.4 |
| 60° | 16.2 |
| 62.5° | 14.1 |
| 65° | 11.9 |
| 67.5° | 10.8 |
| 70° | 8.7 |
| 72.5° | 7.6 |
| 75° | 6.5 |
| 77.5° | 4.3 |
| 80° | 3.2 |
| 82.5° | 2.2 |
| 85° | 1.1 |
| 87.5° | 1.1 |
| 90° | 0.0 |

(END OF REPORT)