

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299397

Luminaire Tested: P3AS17R15W2N902765DE010 E3DLD1WMH\_4000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1299397  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R15W2N902765DE010 E3DLD1WMH\_4000K  
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 4000K CCT AND, 90CRI ,  
E3DLD1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 957.0 lumens  
Efficiency: N/A  
Efficacy: 49.3 lumens/watt  
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.82  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1299397  
CATALOG NUMBER: P3AS17R15W2N902765DE010 E3DLD1WMH\_4000K

### Luminous Intensity Polar Plot

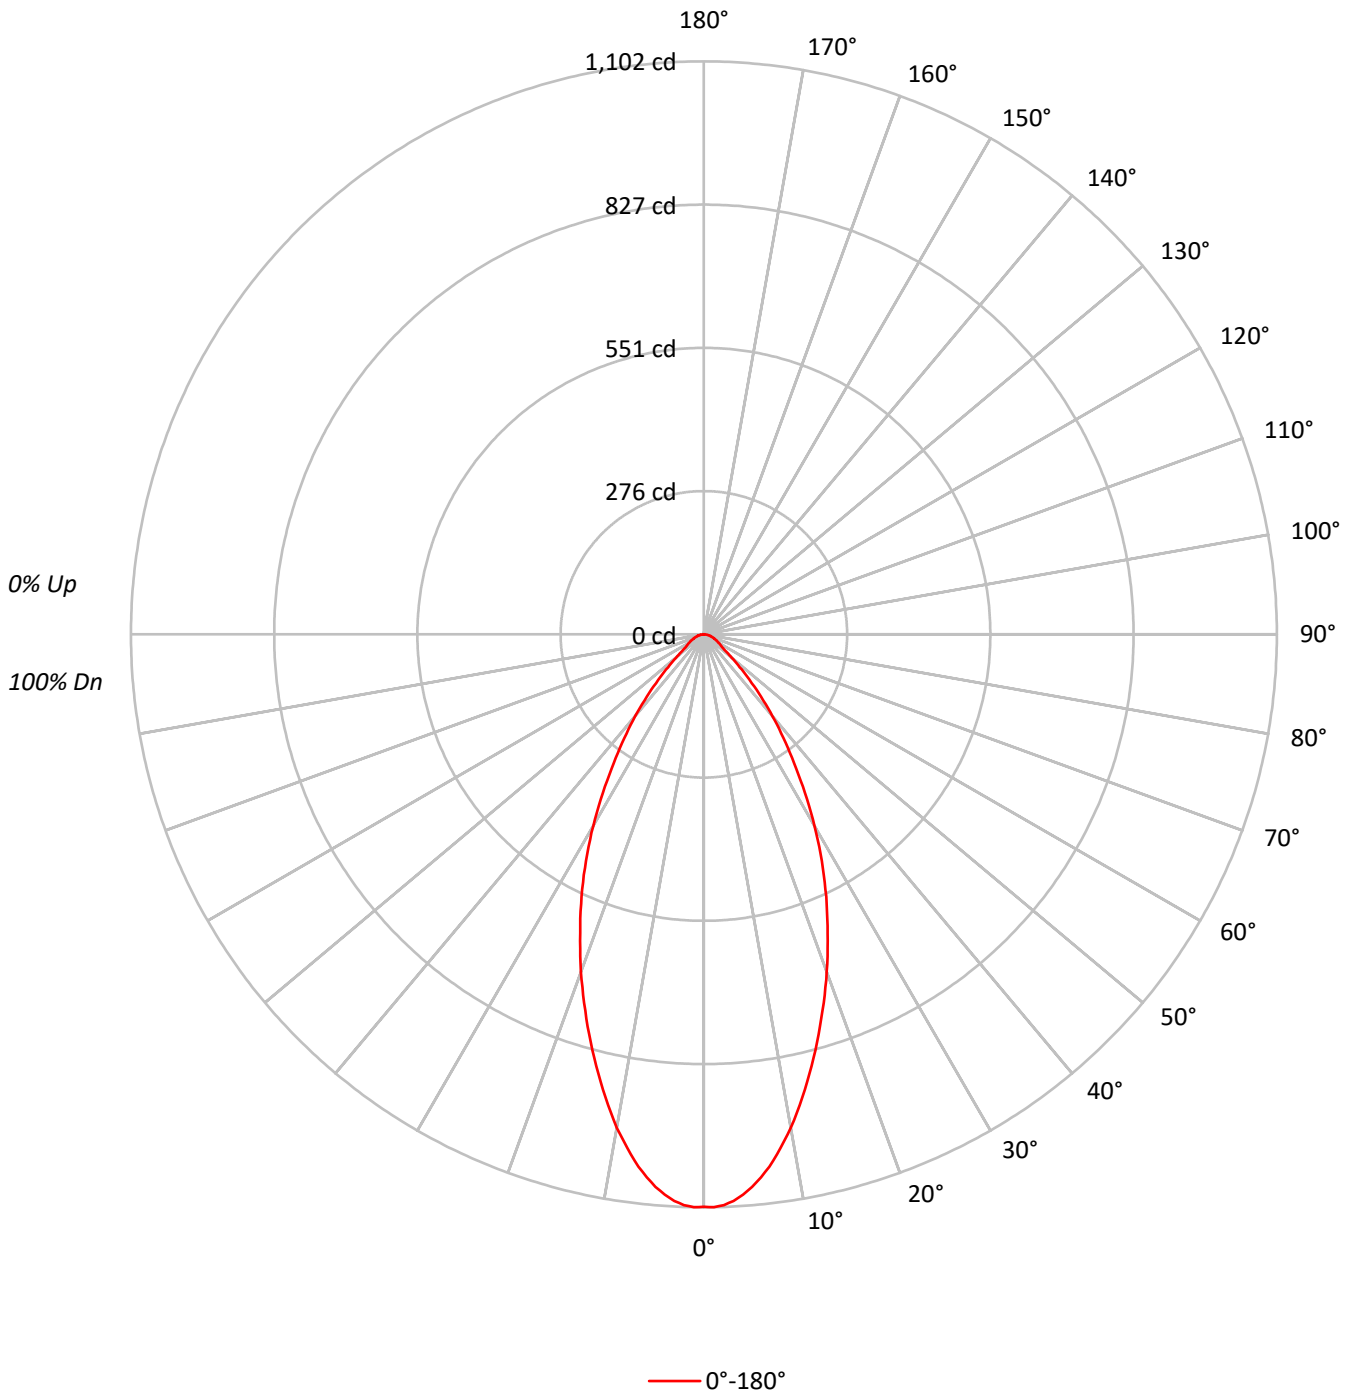



TEST NUMBER: P1299397

CATALOG NUMBER: P3AS17R15W2N902765DE010 E3DLD1WMH\_4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	109	106	104	110	107	105	102	103	101	99	99	98	96	96	95	93	91			
2	106	100	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83			
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70			
5	89	80	73	68	87	79	73	68	77	72	67	75	71	67	74	69	66	65			
6	84	74	68	63	83	73	67	63	72	66	62	70	66	62	69	65	61	60			
7	80	69	63	58	78	69	63	58	67	62	58	66	61	57	65	61	57	56			
8	76	65	59	54	74	65	58	54	63	58	54	62	57	54	61	57	53	52			
9	72	61	55	51	71	61	55	51	60	54	50	59	54	50	58	53	50	49			
10	68	58	52	48	67	57	51	47	57	51	47	56	51	47	55	50	47	46			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	241384
5°	234844
10°	214603
15°	187969
20°	161247
25°	134645
30°	107738
35°	80816
40°	58653
45°	38361
50°	23982
55°	16210
60°	14341
65°	13231
70°	12438
75°	11268
80°	10734
85°	9057

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 38361 cd/sqm



TEST NUMBER: P1299397

CATALOG NUMBER: P3AS17R15W2N902765DE010 E3DLD1WMH\_4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	98.4	10.3
10°-20°	230.7	24.1
20°-30°	254.2	26.6
30°-40°	190.4	19.9
40°-50°	98.7	10.3
50°-60°	40.9	4.3
60°-70°	25.3	2.6
70°-80°	14.2	1.5
80°-90°	4.1	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	583.4	61.0
0°-40°	773.7	80.9
0°-60°	913.3	95.4
0°-90°	957.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	957.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1101	
5°	1067	98
15°	828	231
25°	556	254
35°	302	190
45°	124	99
55°	42	41
65°	26	25
75°	13	14
85°	4	4
90°	0	



TEST NUMBER: P1299397  
CATALOG NUMBER: P3AS17R15W2N902765DE010 E3DLD1WMH\_4000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1100.8
1°	1102.0
2°	1098.4
3°	1091.1
4°	1080.2
5°	1066.9
6°	1049.9
7°	1031.7
8°	1009.9
9°	986.9
10°	963.8
12.5°	897.2
15°	828.0
17.5°	758.9
20°	691.0
22.5°	621.9
25°	556.5
27.5°	491.0
30°	425.5
32.5°	361.3
35°	301.9
37.5°	251.0
40°	204.9
42.5°	162.5
45°	123.7
47.5°	93.4
50°	70.3
52.5°	52.1
55°	42.4
57.5°	37.6
60°	32.7
62.5°	29.1
65°	25.5
67.5°	21.8
70°	19.4
72.5°	15.8
75°	13.3
77.5°	10.9
80°	8.5
82.5°	6.1
85°	3.6
87.5°	1.2
90°	0.0

(END OF REPORT)