

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299511

Luminaire Tested: P3AS17R20W2N902750DE010 E3DL1GPH\_3500K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1299511  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R20W2N902750DE010 E3DL1GPH\_3500K  
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 3500K CCT AND, 90CRI ,  
E3DL1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 615.0 lumens  
Efficiency: N/A  
Efficacy: 31.7 lumens/watt  
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1299511  
CATALOG NUMBER: P3AS17R20W2N902750DE010 E3DL1GPH\_3500K

### Luminous Intensity Polar Plot

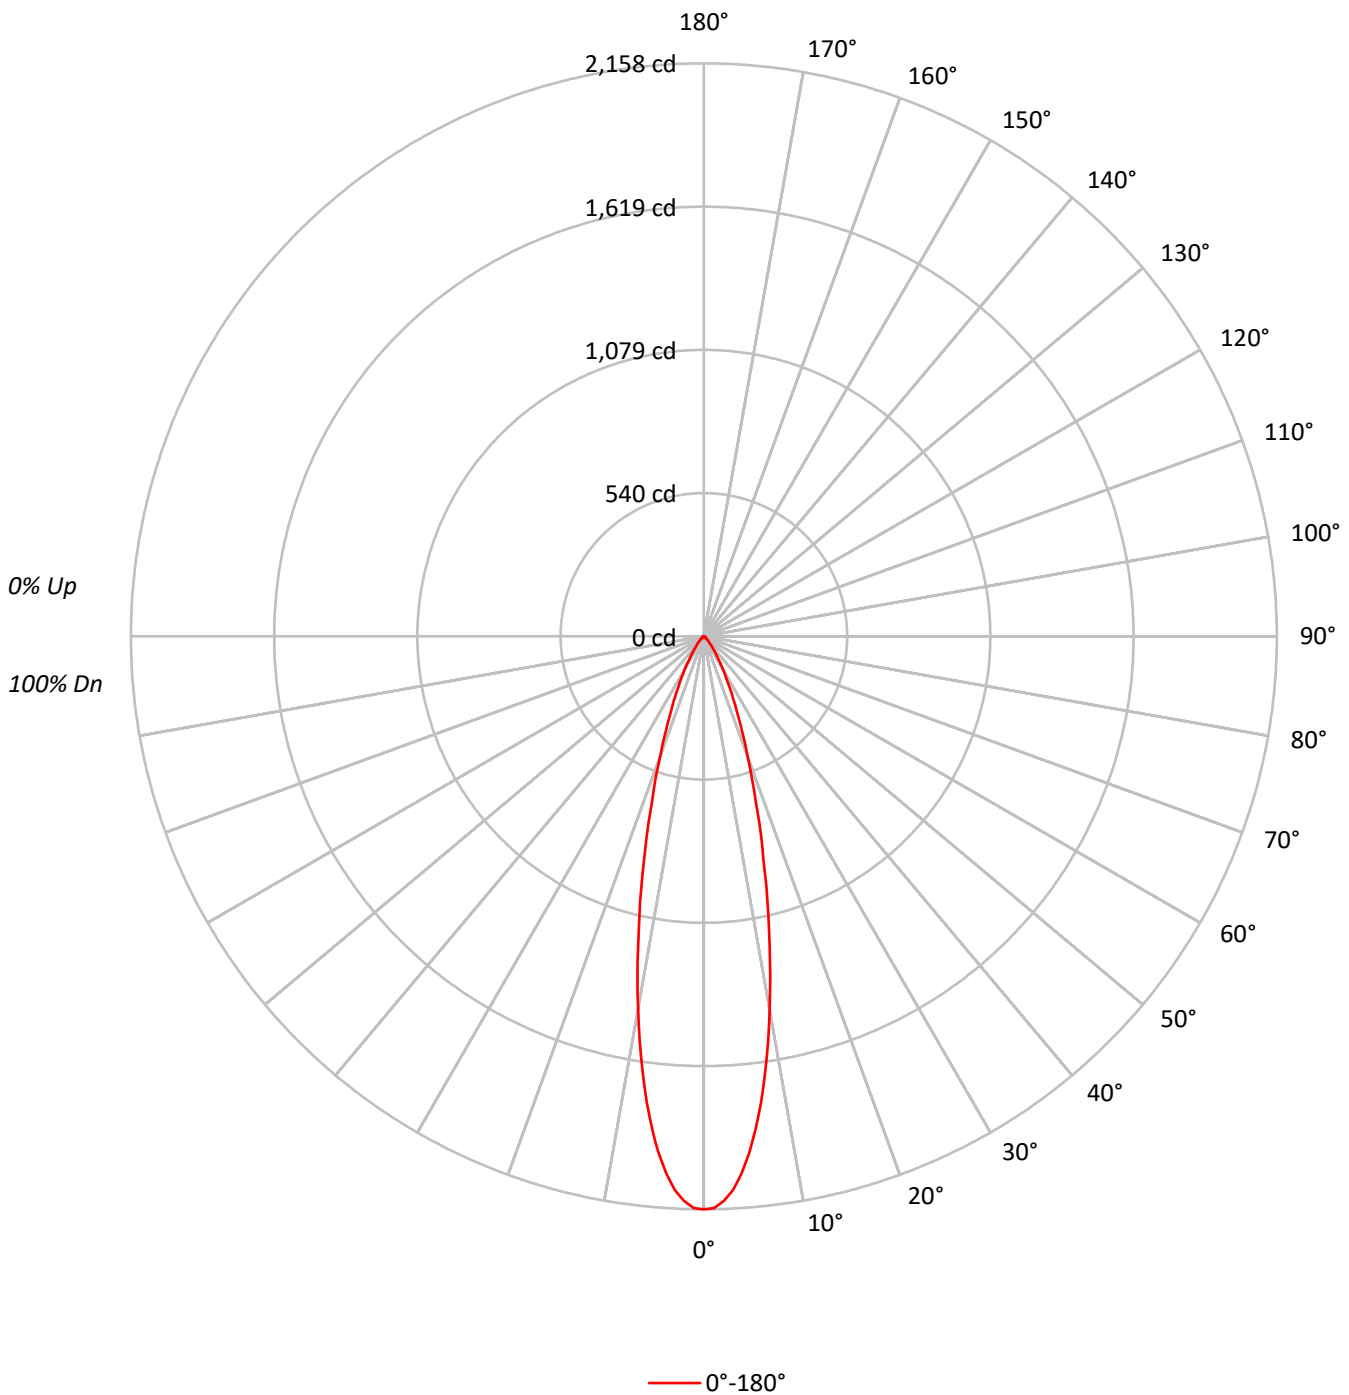



TEST NUMBER: P1299511  
 CATALOG NUMBER: P3AS17R20W2N902750DE010 E3DL1GPH\_3500K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20		
RC	80				70				50				30				10		0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10		0
RCR																			
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102		100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97		95
2	110	106	102	100	108	104	101	98	101	98	96	98	96	94	95	94	92		91
3	106	100	96	93	104	99	95	92	97	93	91	94	92	89	92	90	88		87
4	102	96	91	88	100	95	90	87	92	89	86	91	88	85	89	86	84		83
5	98	91	87	83	97	90	86	83	89	85	82	87	84	81	86	83	81		79
6	95	87	83	79	93	87	82	79	85	81	78	84	81	78	83	80	77		76
7	91	84	79	76	90	83	79	76	82	78	75	81	78	75	80	77	75		73
8	88	81	76	73	87	80	76	73	79	75	72	78	75	72	78	74	72		71
9	85	78	73	70	85	77	73	70	77	73	70	76	72	69	75	72	69		68
10	83	75	71	68	82	75	70	67	74	70	67	73	70	67	73	69	67		66

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	473164
5°	430133
10°	317897
15°	196641
20°	112290
25°	64117
30°	35955
35°	19568
40°	10706
45°	5892
50°	3446
55°	2485
60°	2324
65°	2179
70°	1923
75°	2033
80°	1515
85°	1510

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 5892 cd/sqm



TEST NUMBER: P1299511

CATALOG NUMBER: P3AS17R20W2N902750DE010 E3DL1GPH\_3500K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	169.2	27.5
10°-20°	241.6	39.3
20°-30°	126.1	20.5
30°-40°	48.8	7.9
40°-50°	15.8	2.6
50°-60°	6.2	1.0
60°-70°	4.1	0.7
70°-80°	2.5	0.4
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	536.9	87.3
0°-40°	585.6	95.2
0°-60°	607.6	98.8
0°-90°	615.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	615.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2158	
5°	1954	169
15°	866	242
25°	265	126
35°	73	49
45°	19	16
55°	6	6
65°	4	4
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P1299511  
CATALOG NUMBER: P3AS17R20W2N902750DE010 E3DL1GPH\_3500K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2157.8
1°	2153.7
2°	2128.1
3°	2088.9
4°	2028.3
5°	1954.1
6°	1866.1
7°	1768.7
8°	1655.8
9°	1545.9
10°	1427.7
12.5°	1134.8
15°	866.2
17.5°	648.2
20°	481.2
22.5°	356.5
25°	265.0
27.5°	195.5
30°	142.0
32.5°	102.8
35°	73.1
37.5°	52.9
40°	37.4
42.5°	26.7
45°	19.0
47.5°	13.7
50°	10.1
52.5°	7.7
55°	6.5
57.5°	5.9
60°	5.3
62.5°	4.8
65°	4.2
67.5°	3.6
70°	3.0
72.5°	3.0
75°	2.4
77.5°	1.8
80°	1.2
82.5°	1.2
85°	0.6
87.5°	0.6
90°	0.0

(END OF REPORT)