

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299538

Luminaire Tested: P3AS17R20W2N902750DE010 E3DLD1GPH_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1299538
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R20W2N902750DE010 E3DLD1GPH_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 5000K CCT AND, 90CRI ,
E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 465.0 lumens
Efficiency: N/A
Efficacy: 24.0 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1299538
CATALOG NUMBER: P3AS17R20W2N902750DE010 E3DLD1GPH_5000K

Luminous Intensity Polar Plot

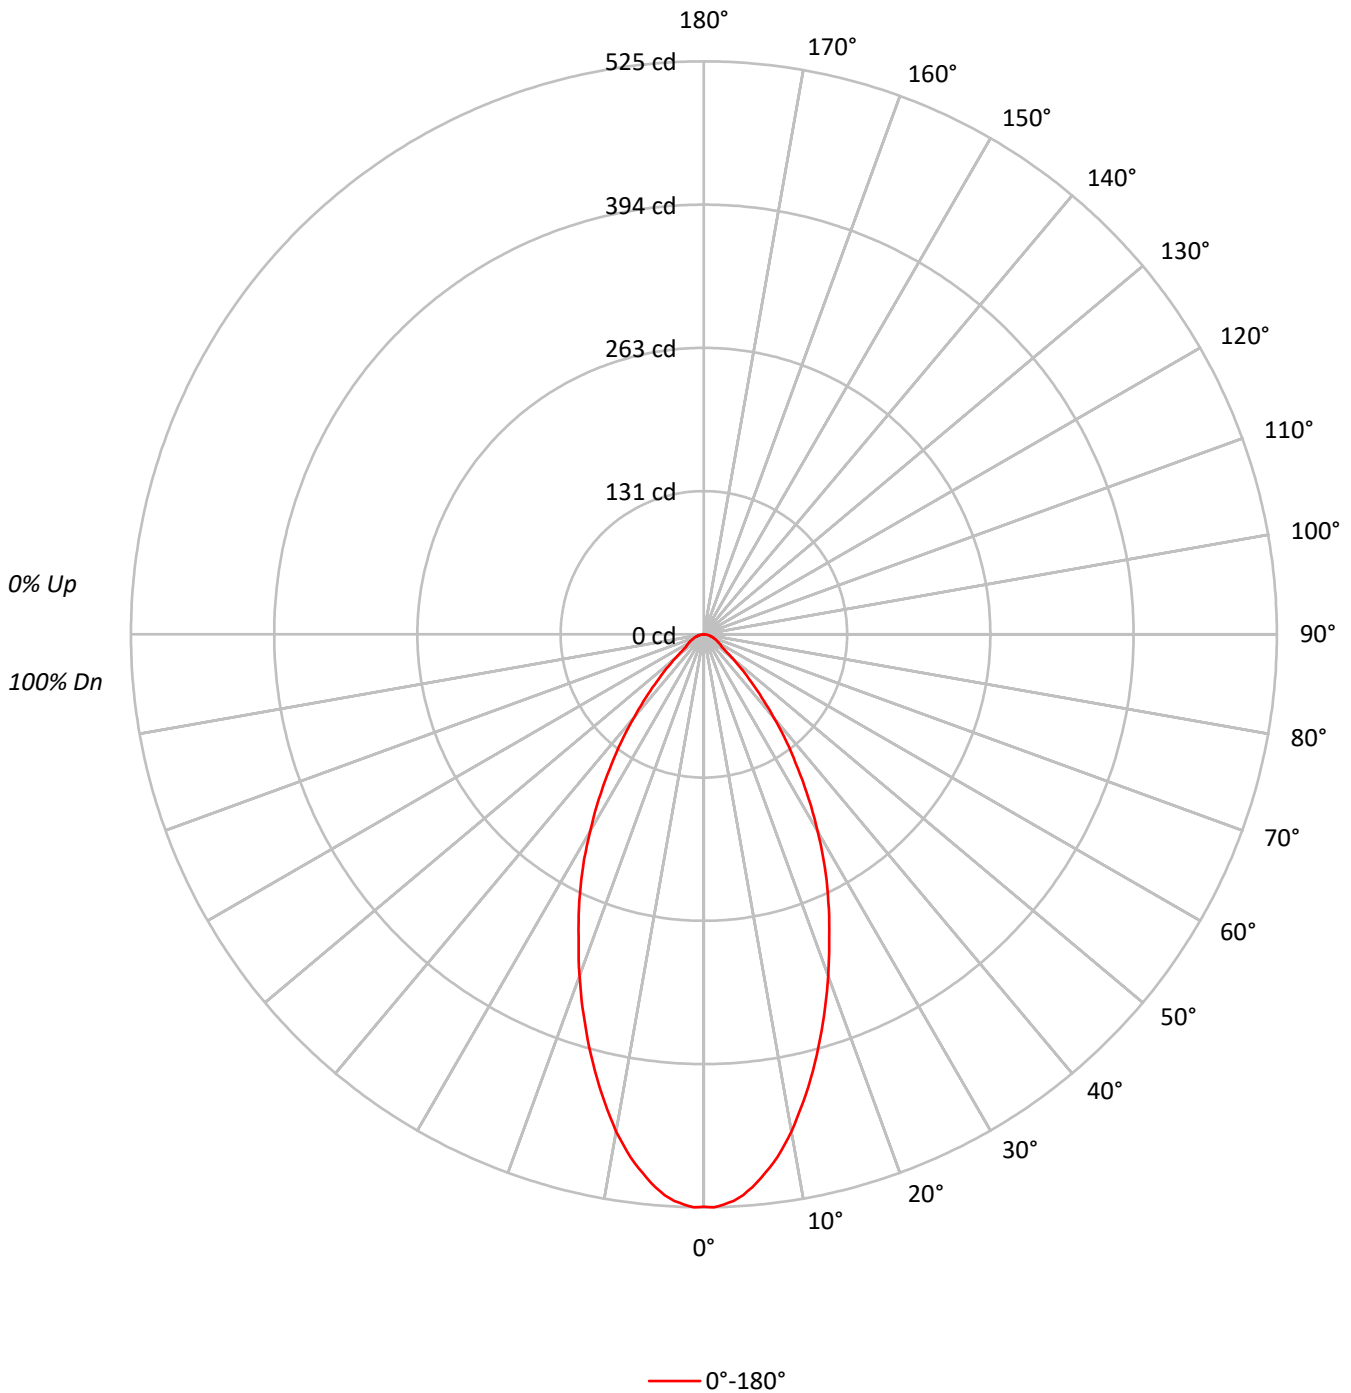



TEST NUMBER: P1299538

CATALOG NUMBER: P3AS17R20W2N902750DE010 E3DLD1GPH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	109	106	104	110	107	105	102	103	101	99	99	98	96	96	95	93	91			91
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	90	87	85	83			83
3	100	93	87	82	98	91	86	82	88	84	80	86	82	79	84	81	78	76			76
4	94	86	79	75	92	85	79	74	82	77	73	80	76	72	78	75	72	70			70
5	89	80	73	68	87	79	73	68	77	71	67	75	70	67	73	69	66	65			65
6	84	74	68	63	82	73	67	63	72	66	62	70	65	62	69	65	61	60			60
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	60	57	55			55
8	75	65	59	54	74	64	58	54	63	58	54	62	57	53	61	57	53	52			52
9	72	61	55	50	70	61	55	50	60	54	50	59	54	50	58	53	50	48			48
10	68	58	51	47	67	57	51	47	56	51	47	56	50	47	55	50	47	45			45

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	115013
5°	111952
10°	102982
15°	90648
20°	77730
25°	65302
30°	52793
35°	40154
40°	28568
45°	18855
50°	11701
55°	7684
60°	6973
65°	6434
70°	6091
75°	5507
80°	5177
85°	4529

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 18855 cd/sqm



TEST NUMBER: P1299538

CATALOG NUMBER: P3AS17R20W2N902750DE010 E3DLD1GPH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.0	10.1
10°-20°	111.2	23.9
20°-30°	123.4	26.5
30°-40°	94.1	20.2
40°-50°	48.2	10.4
50°-60°	19.8	4.3
60°-70°	12.3	2.7
70°-80°	6.9	1.5
80°-90°	2.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	281.6	60.6
0°-40°	375.7	80.8
0°-60°	443.7	95.4
0°-90°	465.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	465.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	524	
5°	509	47
15°	399	111
25°	270	123
35°	150	94
45°	61	48
55°	20	20
65°	12	12
75°	6	7
85°	2	2
90°	0	



TEST NUMBER: P1299538
CATALOG NUMBER: P3AS17R20W2N902750DE010 E3DLD1GPH_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	524.5
1°	525.1
2°	522.8
3°	519.8
4°	515.1
5°	508.6
6°	500.9
7°	492.6
8°	483.8
9°	473.1
10°	462.5
12.5°	431.8
15°	399.3
17.5°	366.2
20°	333.1
22.5°	300.1
25°	269.9
27.5°	239.8
30°	208.5
32.5°	179.0
35°	150.0
37.5°	124.6
40°	99.8
42.5°	78.6
45°	60.8
47.5°	46.1
50°	34.3
52.5°	25.4
55°	20.1
57.5°	18.3
60°	15.9
62.5°	14.2
65°	12.4
67.5°	10.6
70°	9.5
72.5°	7.7
75°	6.5
77.5°	5.3
80°	4.1
82.5°	3.0
85°	1.8
87.5°	0.6
90°	0.0

(END OF REPORT)