

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299539

Luminaire Tested: P3AS17R20W2N902750DE010 E3DLD1H\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1299539  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R20W2N902750DE010 E3DLD1H\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 2700K CCT AND, 90CRI ,  
E3DLD1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 852.0 lumens  
Efficiency: N/A  
Efficacy: 43.9 lumens/watt  
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1299539  
CATALOG NUMBER: P3AS17R20W2N902750DE010 E3DLD1H\_2700K

### Luminous Intensity Polar Plot

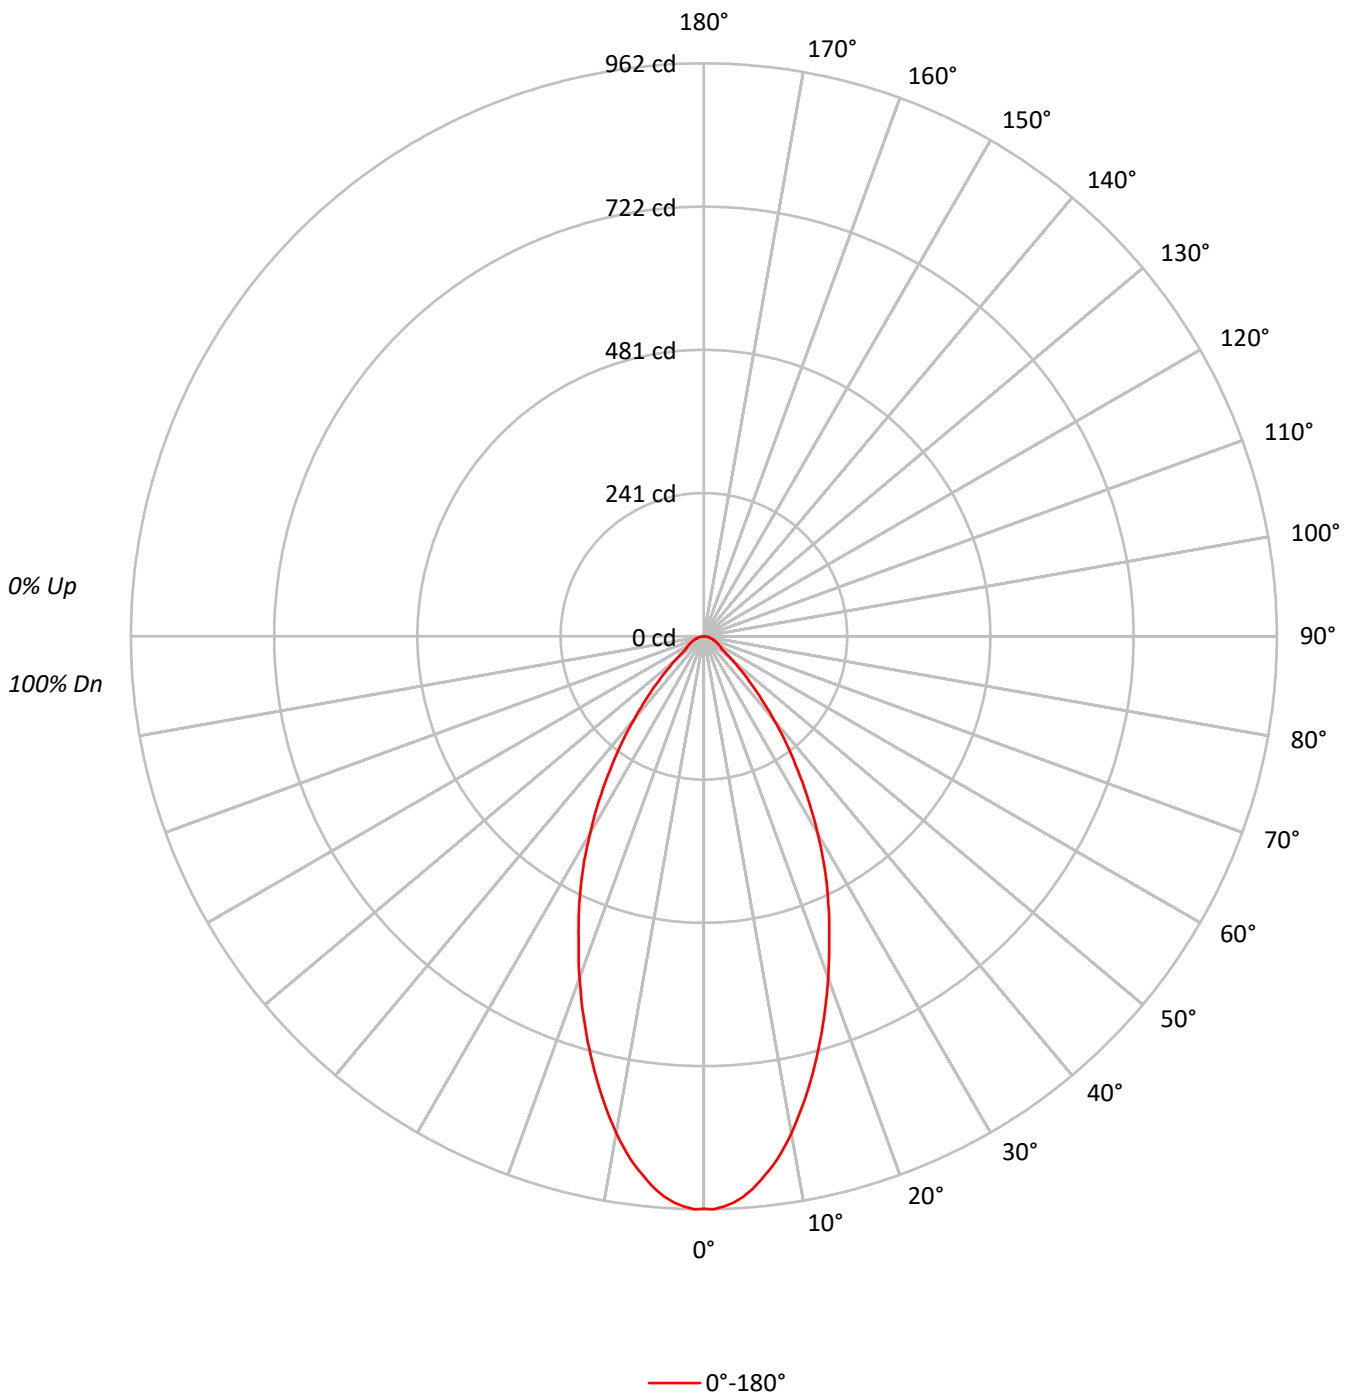



TEST NUMBER: P1299539  
 CATALOG NUMBER: P3AS17R20W2N902750DE010 E3DLD1H\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	109	106	104	110	107	105	102	103	101	99	99	98	96	96	95	93	91			91
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	90	87	85	83			83
3	100	93	87	82	98	91	86	82	88	84	80	86	82	79	84	81	78	76			76
4	94	86	79	75	92	85	79	74	82	77	73	80	76	72	78	75	72	70			70
5	89	80	73	68	87	79	73	68	77	71	67	75	70	67	73	69	66	65			65
6	84	74	68	63	82	73	67	63	72	66	62	70	65	62	69	65	61	60			60
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	60	57	55			55
8	75	65	59	54	74	64	58	54	63	58	54	62	57	53	61	57	53	52			52
9	72	61	55	50	70	61	55	50	60	54	50	59	54	50	58	53	50	48			48
10	68	58	51	47	67	57	51	47	56	51	47	56	51	47	55	50	47	45			45

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	210751
5°	205106
10°	188685
15°	166085
20°	142439
25°	119668
30°	96724
35°	73589
40°	52355
45°	34577
50°	21424
55°	14069
60°	12806
65°	11778
70°	11092
75°	10082
80°	9597
85°	8051

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 34577 cd/sqm



TEST NUMBER: P1299539

CATALOG NUMBER: P3AS17R20W2N902750DE010 E3DLD1H\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	86.2	10.1
10°-20°	203.7	23.9
20°-30°	226.1	26.5
30°-40°	172.5	20.2
40°-50°	88.3	10.4
50°-60°	36.3	4.3
60°-70°	22.6	2.7
70°-80°	12.7	1.5
80°-90°	3.7	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	515.9	60.6
0°-40°	688.4	80.8
0°-60°	813.0	95.4
0°-90°	852.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	852.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	961	
5°	932	86
15°	732	204
25°	495	226
35°	275	172
45°	112	88
55°	37	36
65°	23	23
75°	12	13
85°	3	4
90°	0	



TEST NUMBER: P1299539  
CATALOG NUMBER: P3AS17R20W2N902750DE010 E3DLD1H\_2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	961.1
1°	962.1
2°	957.8
3°	952.4
4°	943.7
5°	931.8
6°	917.8
7°	902.6
8°	886.4
9°	866.9
10°	847.4
12.5°	791.1
15°	731.6
17.5°	671.0
20°	610.4
22.5°	549.8
25°	494.6
27.5°	439.4
30°	382.0
32.5°	327.9
35°	274.9
37.5°	228.4
40°	182.9
42.5°	143.9
45°	111.5
47.5°	84.4
50°	62.8
52.5°	46.5
55°	36.8
57.5°	33.6
60°	29.2
62.5°	26.0
65°	22.7
67.5°	19.5
70°	17.3
72.5°	14.1
75°	11.9
77.5°	9.7
80°	7.6
82.5°	5.4
85°	3.2
87.5°	1.1
90°	0.0

(END OF REPORT)