

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299556

Luminaire Tested: P3AS17R20W2N902750DE010 E3DLD1WH_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1299556
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R20W2N902750DE010 E3DLD1WH_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 3500K CCT AND, 90CRI ,
E3DLD1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 954.0 lumens
Efficiency: N/A
Efficacy: 49.2 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1299556
CATALOG NUMBER: P3AS17R20W2N902750DE010 E3DLD1WH_3500K

Luminous Intensity Polar Plot

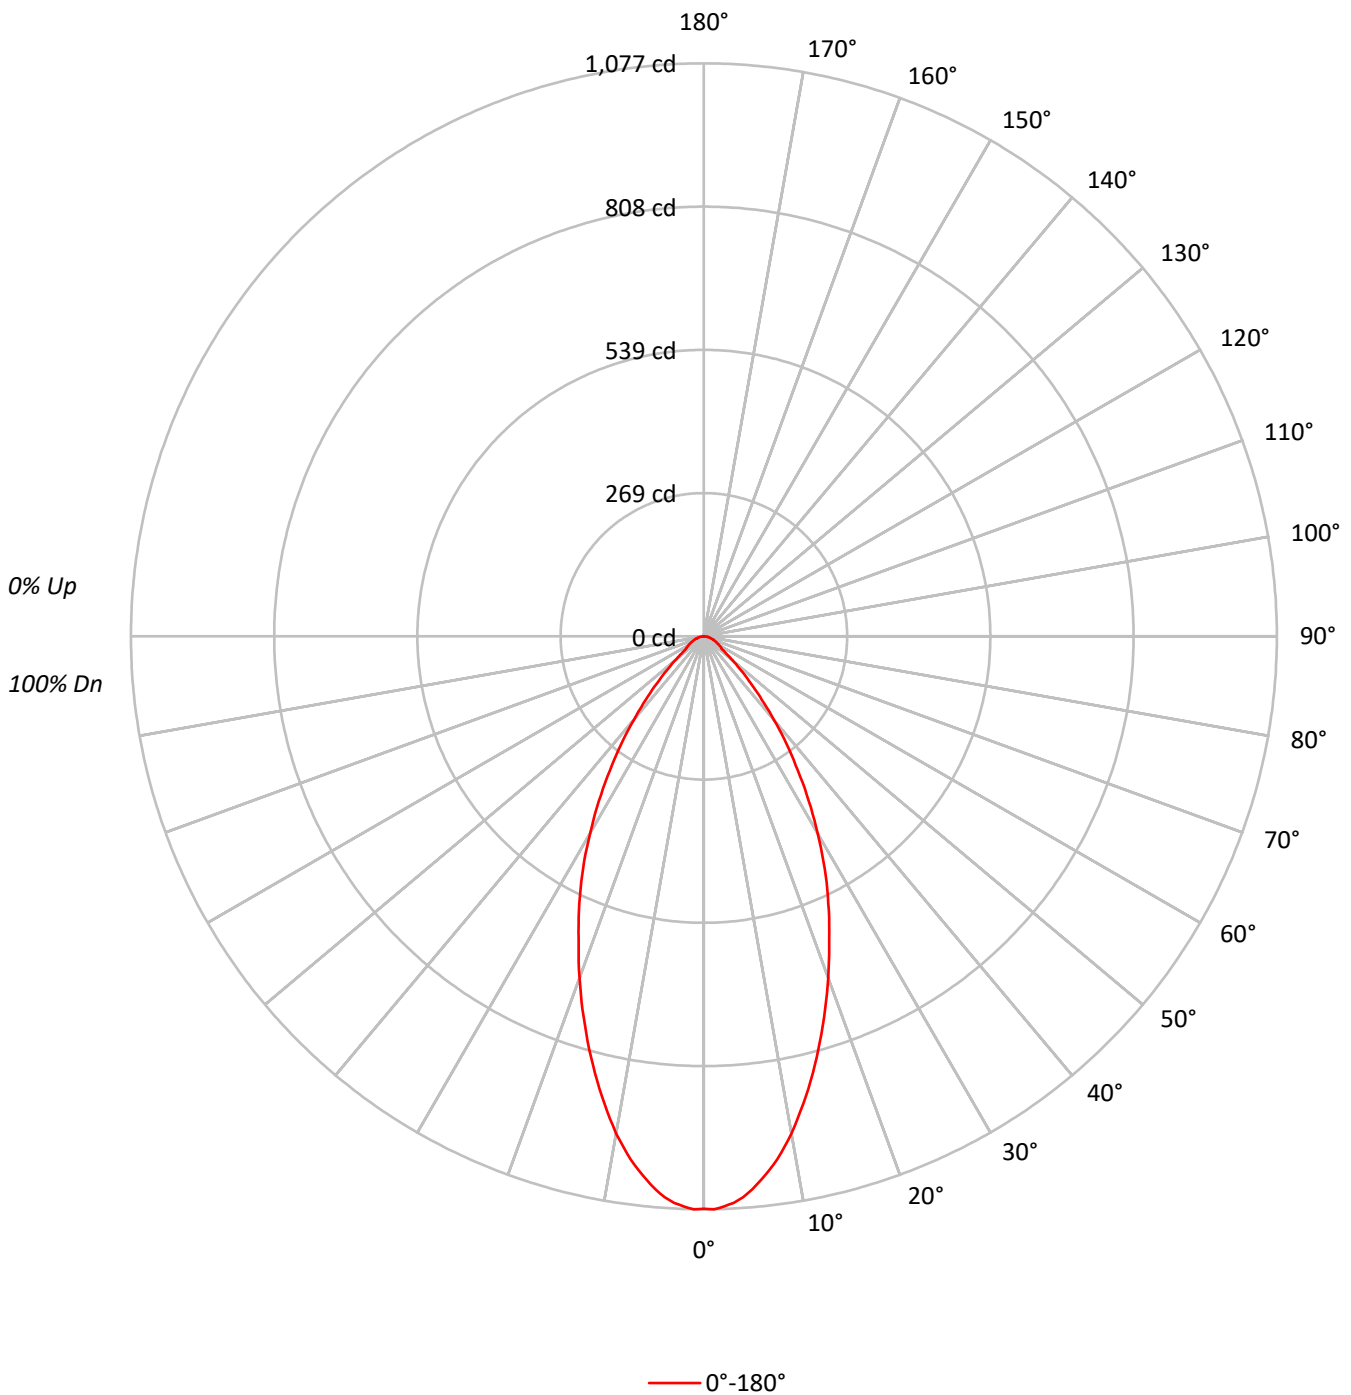



TEST NUMBER: P1299556
 CATALOG NUMBER: P3AS17R20W2N902750DE010 E3DLD1WH_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	96.5	10.1
10°-20°	228.1	23.9
20°-30°	253.1	26.5
30°-40°	193.1	20.2
40°-50°	98.9	10.4
50°-60°	40.6	4.3
60°-70°	25.3	2.7
70°-80°	14.2	1.5
80°-90°	4.1	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	577.7	60.6
0°-40°	770.8	80.8
0°-60°	910.3	95.4
0°-90°	954.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	954.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1076	
5°	1043	97
15°	819	228
25°	554	253
35°	308	193
45°	125	99
55°	41	41
65°	25	25
75°	13	14
85°	4	4
90°	0	



TEST NUMBER: P1299556
CATALOG NUMBER: P3AS17R20W2N902750DE010 E3DLD1WH_3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1076.1
1°	1077.3
2°	1072.5
3°	1066.4
4°	1056.7
5°	1043.4
6°	1027.6
7°	1010.7
8°	992.5
9°	970.7
10°	948.9
12.5°	885.9
15°	819.2
17.5°	751.3
20°	683.5
22.5°	615.6
25°	553.8
27.5°	492.0
30°	427.8
32.5°	367.2
35°	307.8
37.5°	255.7
40°	204.8
42.5°	161.2
45°	124.8
47.5°	94.5
50°	70.3
52.5°	52.1
55°	41.2
57.5°	37.6
60°	32.7
62.5°	29.1
65°	25.4
67.5°	21.8
70°	19.4
72.5°	15.8
75°	13.3
77.5°	10.9
80°	8.5
82.5°	6.1
85°	3.6
87.5°	1.2
90°	0.0

(END OF REPORT)