

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299650

Luminaire Tested: P3AS17R20W2N902765DE010 E3DL1GPH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1299650
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R20W2N902765DE010 E3DL1GPH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 2700K CCT AND, 90CRI ,
E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 549.0 lumens
Efficiency: N/A
Efficacy: 28.3 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1299650
CATALOG NUMBER: P3AS17R20W2N902765DE010 E3DL1GPH_2700K

Luminous Intensity Polar Plot

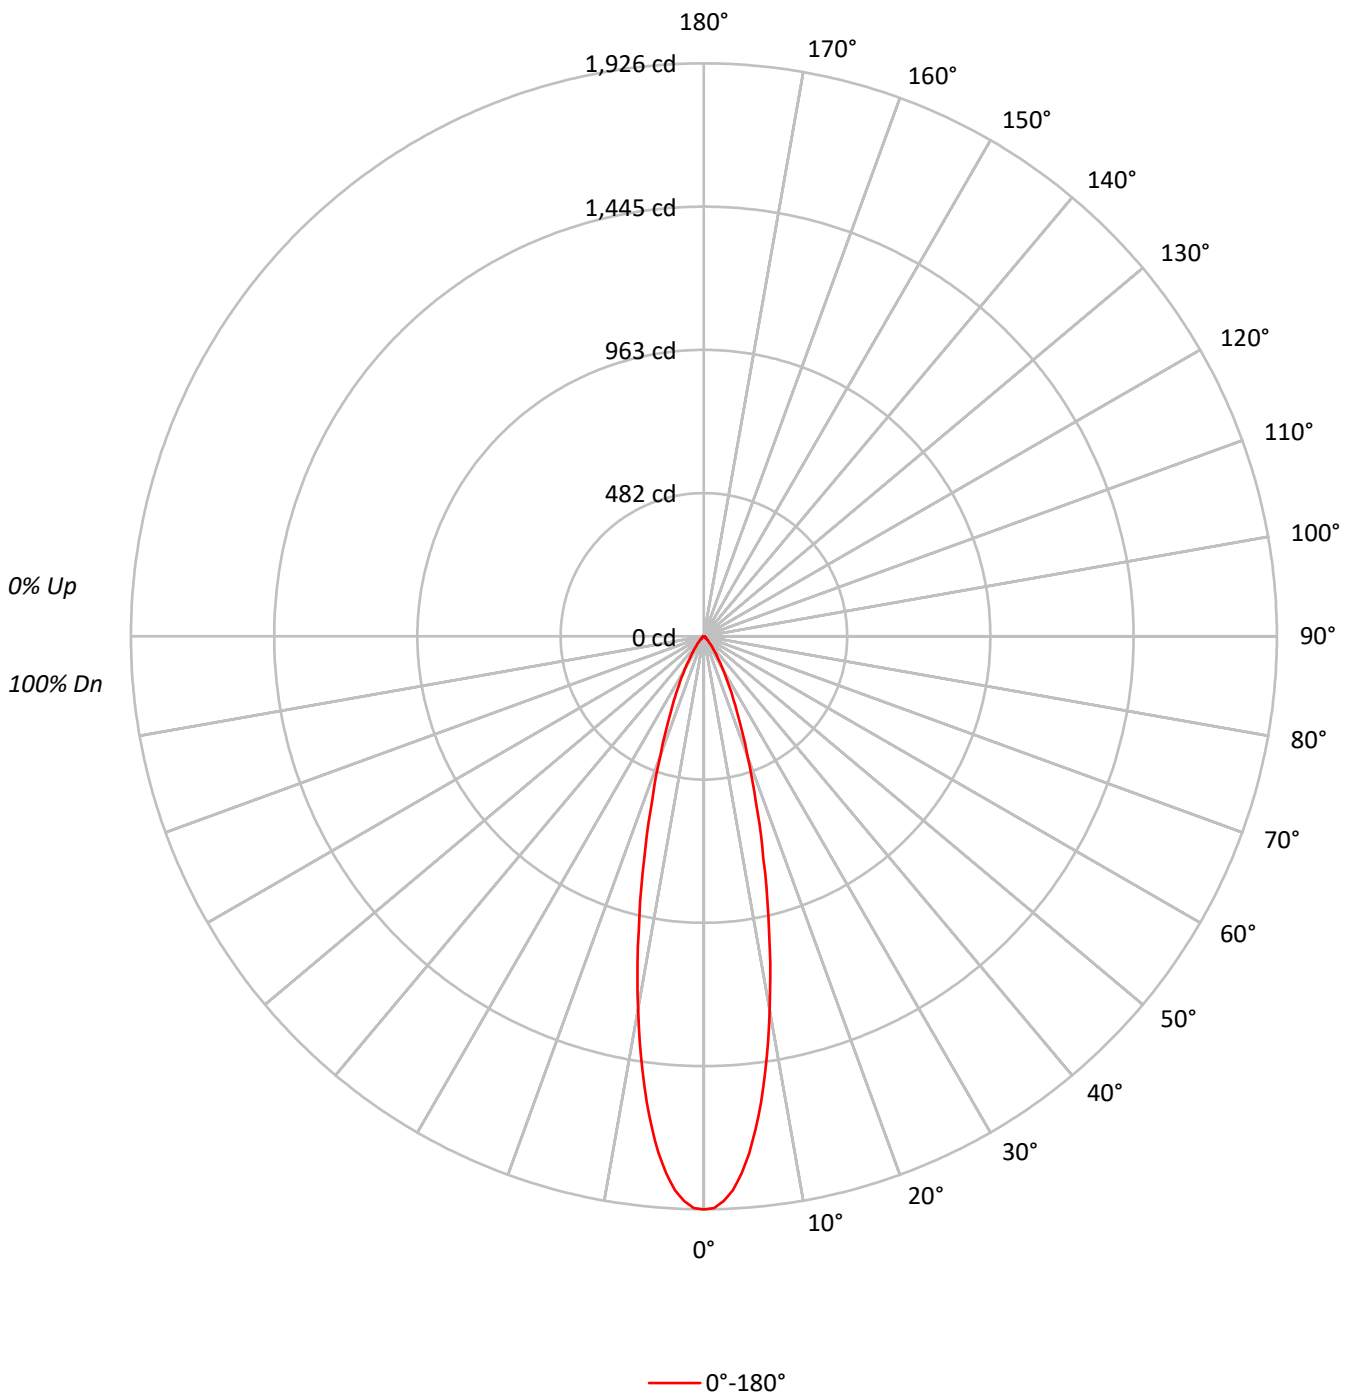



TEST NUMBER: P1299650
 CATALOG NUMBER: P3AS17R20W2N902765DE010 E3DL1GPH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	106	102	100	108	104	101	98	101	98	96	98	96	94	95	94	92	91	91	91	91
3	106	100	96	93	104	99	95	92	97	93	91	94	92	89	92	90	88	87	87	87	87
4	102	96	91	88	100	95	90	87	92	89	86	91	88	85	89	86	84	83	83	83	83
5	98	91	87	83	97	90	86	83	89	85	82	87	84	81	86	83	81	79	79	79	79
6	95	87	83	79	93	87	82	79	85	81	78	84	81	78	83	80	77	76	76	76	76
7	91	84	79	76	90	83	79	76	82	78	75	81	78	75	80	77	75	73	73	73	73
8	88	81	76	73	87	80	76	73	79	75	72	78	75	72	78	74	72	71	71	71	71
9	85	78	73	70	85	77	73	70	77	73	70	76	72	69	75	72	69	68	68	68	68
10	83	75	71	68	82	75	70	67	74	70	67	73	70	67	73	69	67	66	66	66	66

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	422400
5°	383974
10°	283785
15°	175552
20°	100249
25°	57221
30°	32106
35°	17454
40°	9561
45°	5272
50°	3070
55°	2217
60°	2105
65°	1920
70°	1731
75°	1779
80°	1389
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 5272 cd/sqm



TEST NUMBER: P1299650

CATALOG NUMBER: P3AS17R20W2N902765DE010 E3DL1GPH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	151.1	27.5
10°-20°	215.6	39.3
20°-30°	112.6	20.5
30°-40°	43.5	7.9
40°-50°	14.1	2.6
50°-60°	5.6	1.0
60°-70°	3.7	0.7
70°-80°	2.2	0.4
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	479.2	87.3
0°-40°	522.8	95.2
0°-60°	542.4	98.8
0°-90°	549.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	549.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1926	
5°	1744	151
15°	773	216
25°	236	113
35°	65	44
45°	17	14
55°	6	6
65°	4	4
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P1299650
CATALOG NUMBER: P3AS17R20W2N902765DE010 E3DL1GPH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1926.3
1°	1922.6
2°	1899.7
3°	1864.7
4°	1810.6
5°	1744.4
6°	1665.9
7°	1578.9
8°	1478.1
9°	1380.0
10°	1274.5
12.5°	1013.0
15°	773.3
17.5°	578.6
20°	429.6
22.5°	318.2
25°	236.5
27.5°	174.5
30°	126.8
32.5°	91.8
35°	65.2
37.5°	47.2
40°	33.4
42.5°	23.9
45°	17.0
47.5°	12.2
50°	9.0
52.5°	6.9
55°	5.8
57.5°	5.3
60°	4.8
62.5°	4.2
65°	3.7
67.5°	3.2
70°	2.7
72.5°	2.7
75°	2.1
77.5°	1.6
80°	1.1
82.5°	1.1
85°	0.5
87.5°	0.5
90°	0.0

(END OF REPORT)