

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299657

Luminaire Tested: P3AS17R20W2N902765DE010 E3DL1H\_3000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1299657  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R20W2N902765DE010 E3DL1H\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 3000K CCT AND, 90CRI ,  
E3DL1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1236.0 lumens  
Efficiency: N/A  
Efficacy: 63.7 lumens/watt  
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1299657  
CATALOG NUMBER: P3AS17R20W2N902765DE010 E3DL1H\_3000K

### Luminous Intensity Polar Plot

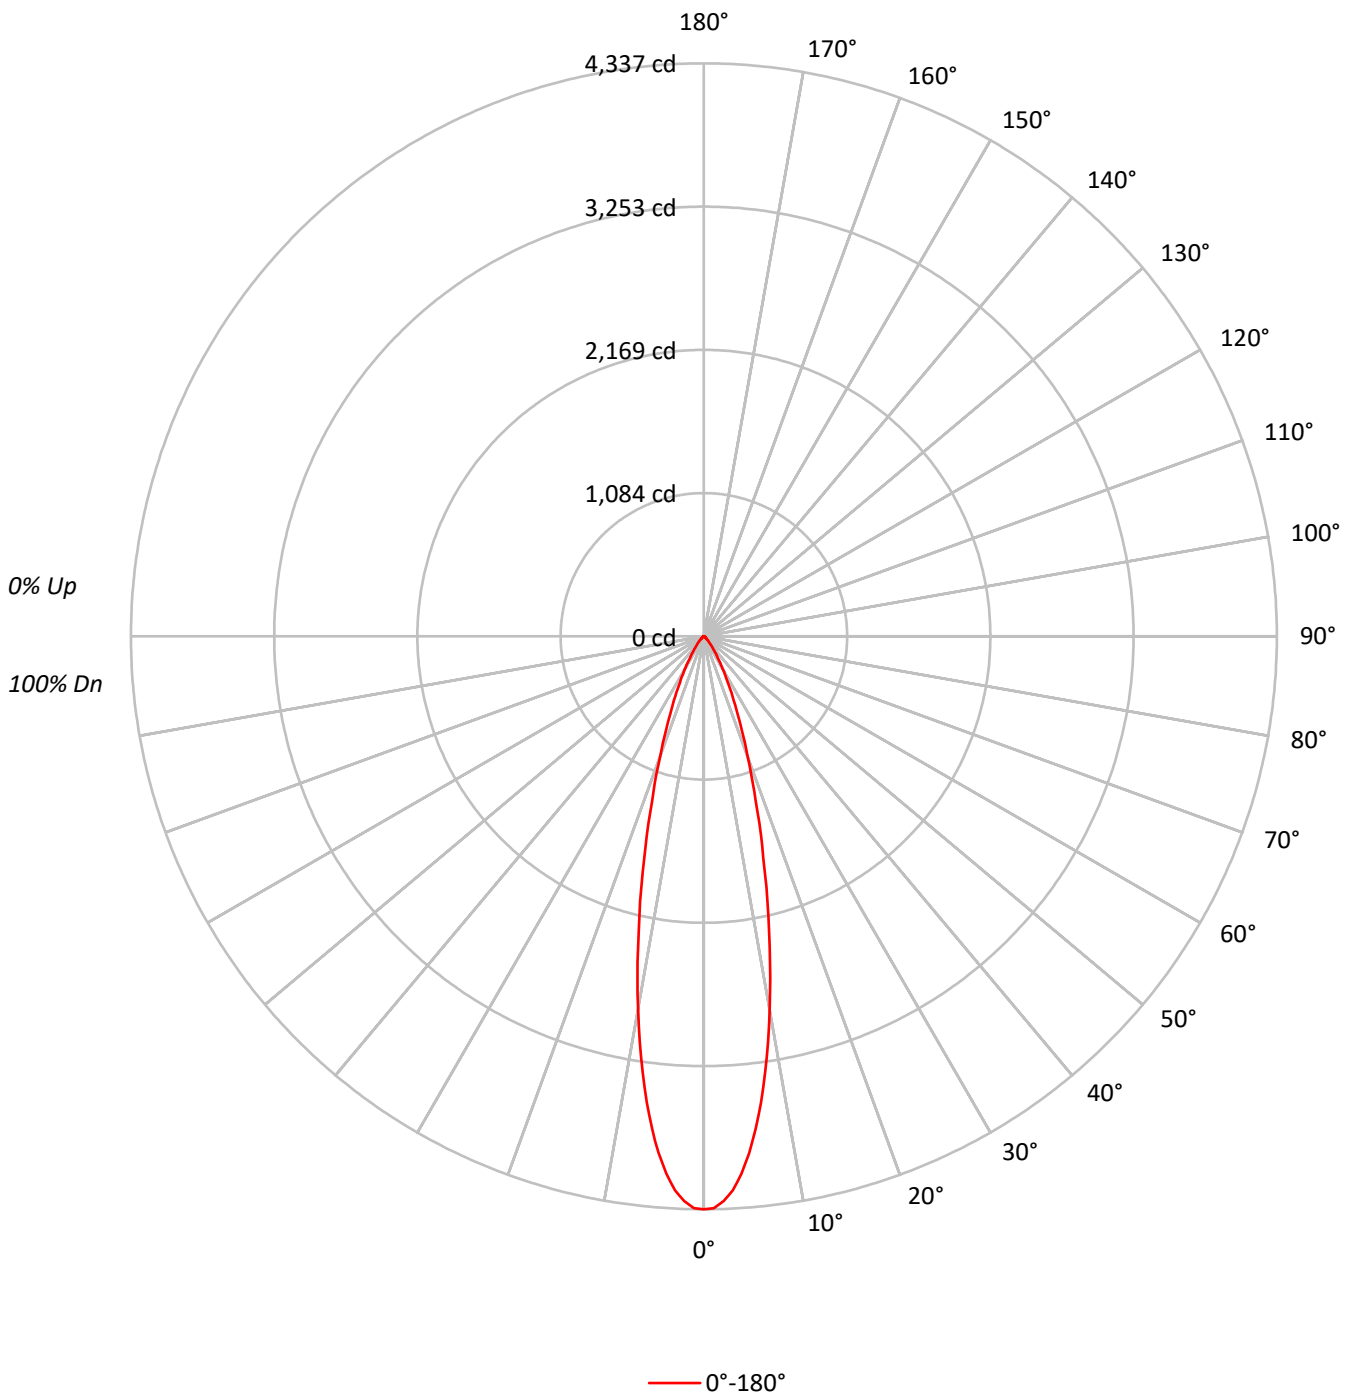



TEST NUMBER: P1299657

CATALOG NUMBER: P3AS17R20W2N902765DE010 E3DL1H\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	106	102	100	108	104	101	98	101	98	96	98	96	94	95	94	92	91	91	91	91
3	106	100	96	93	104	99	95	92	97	93	91	94	92	89	92	90	88	87	87	87	87
4	102	96	91	88	100	95	90	87	92	89	86	91	88	85	89	86	84	83	83	83	83
5	98	91	87	83	97	90	86	83	89	85	82	87	84	81	86	83	81	79	79	79	79
6	95	87	83	79	93	87	82	79	85	81	78	84	81	78	83	80	77	76	76	76	76
7	91	84	79	76	90	83	79	76	82	78	75	81	78	75	80	77	75	73	73	73	73
8	88	81	76	73	87	80	76	73	79	75	72	78	75	72	78	74	72	71	71	71	71
9	85	78	73	70	85	77	73	70	77	73	70	76	72	69	75	72	69	68	68	68	68
10	83	75	71	68	82	75	70	67	74	70	67	73	70	67	73	69	67	66	66	66	66

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	950955
5°	864449
10°	638888
15°	395212
20°	225700
25°	128838
30°	72264
35°	39324
40°	21526
45°	11846
50°	6925
55°	5008
60°	4693
65°	4358
70°	3847
75°	4067
80°	3031
85°	3019

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11846 cd/sqm



TEST NUMBER: P1299657

CATALOG NUMBER: P3AS17R20W2N902765DE010 E3DL1H\_3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	340.1	27.5
10°-20°	485.5	39.3
20°-30°	253.4	20.5
30°-40°	98.0	7.9
40°-50°	31.8	2.6
50°-60°	12.5	1.0
60°-70°	8.3	0.7
70°-80°	4.9	0.4
80°-90°	1.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1078.9	87.3
0°-40°	1176.9	95.2
0°-60°	1221.2	98.8
0°-90°	1236.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1236.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4337	
5°	3927	340
15°	1741	485
25°	532	253
35°	147	98
45°	38	32
55°	13	12
65°	8	8
75°	5	5
85°	1	2
90°	0	



TEST NUMBER: P1299657  
CATALOG NUMBER: P3AS17R20W2N902765DE010 E3DL1H\_3000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	4336.7
1°	4328.4
2°	4277.0
3°	4198.2
4°	4076.4
5°	3927.2
6°	3750.5
7°	3554.6
8°	3327.8
9°	3106.9
10°	2869.3
12.5°	2280.6
15°	1740.9
17.5°	1302.7
20°	967.2
22.5°	716.4
25°	532.5
27.5°	392.8
30°	285.4
32.5°	206.6
35°	146.9
37.5°	106.3
40°	75.2
42.5°	53.7
45°	38.2
47.5°	27.5
50°	20.3
52.5°	15.5
55°	13.1
57.5°	11.9
60°	10.7
62.5°	9.6
65°	8.4
67.5°	7.2
70°	6.0
72.5°	6.0
75°	4.8
77.5°	3.6
80°	2.4
82.5°	2.4
85°	1.2
87.5°	1.2
90°	0.0

(END OF REPORT)