

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299880

Luminaire Tested: P3AS17R25W2N902750DE010 E3DLP1WMH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1299880
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R25W2N902750DE010 E3DLP1WMH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 2700K CCT AND, 90CRI ,
E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 694.0 lumens
Efficiency: N/A
Efficacy: 35.8 lumens/watt
Spacing Criteria (0/90/45): 0.62 / 0.62 / 0.68
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1299880
CATALOG NUMBER: P3AS17R25W2N902750DE010 E3DLP1WMH_2700K

Luminous Intensity Polar Plot

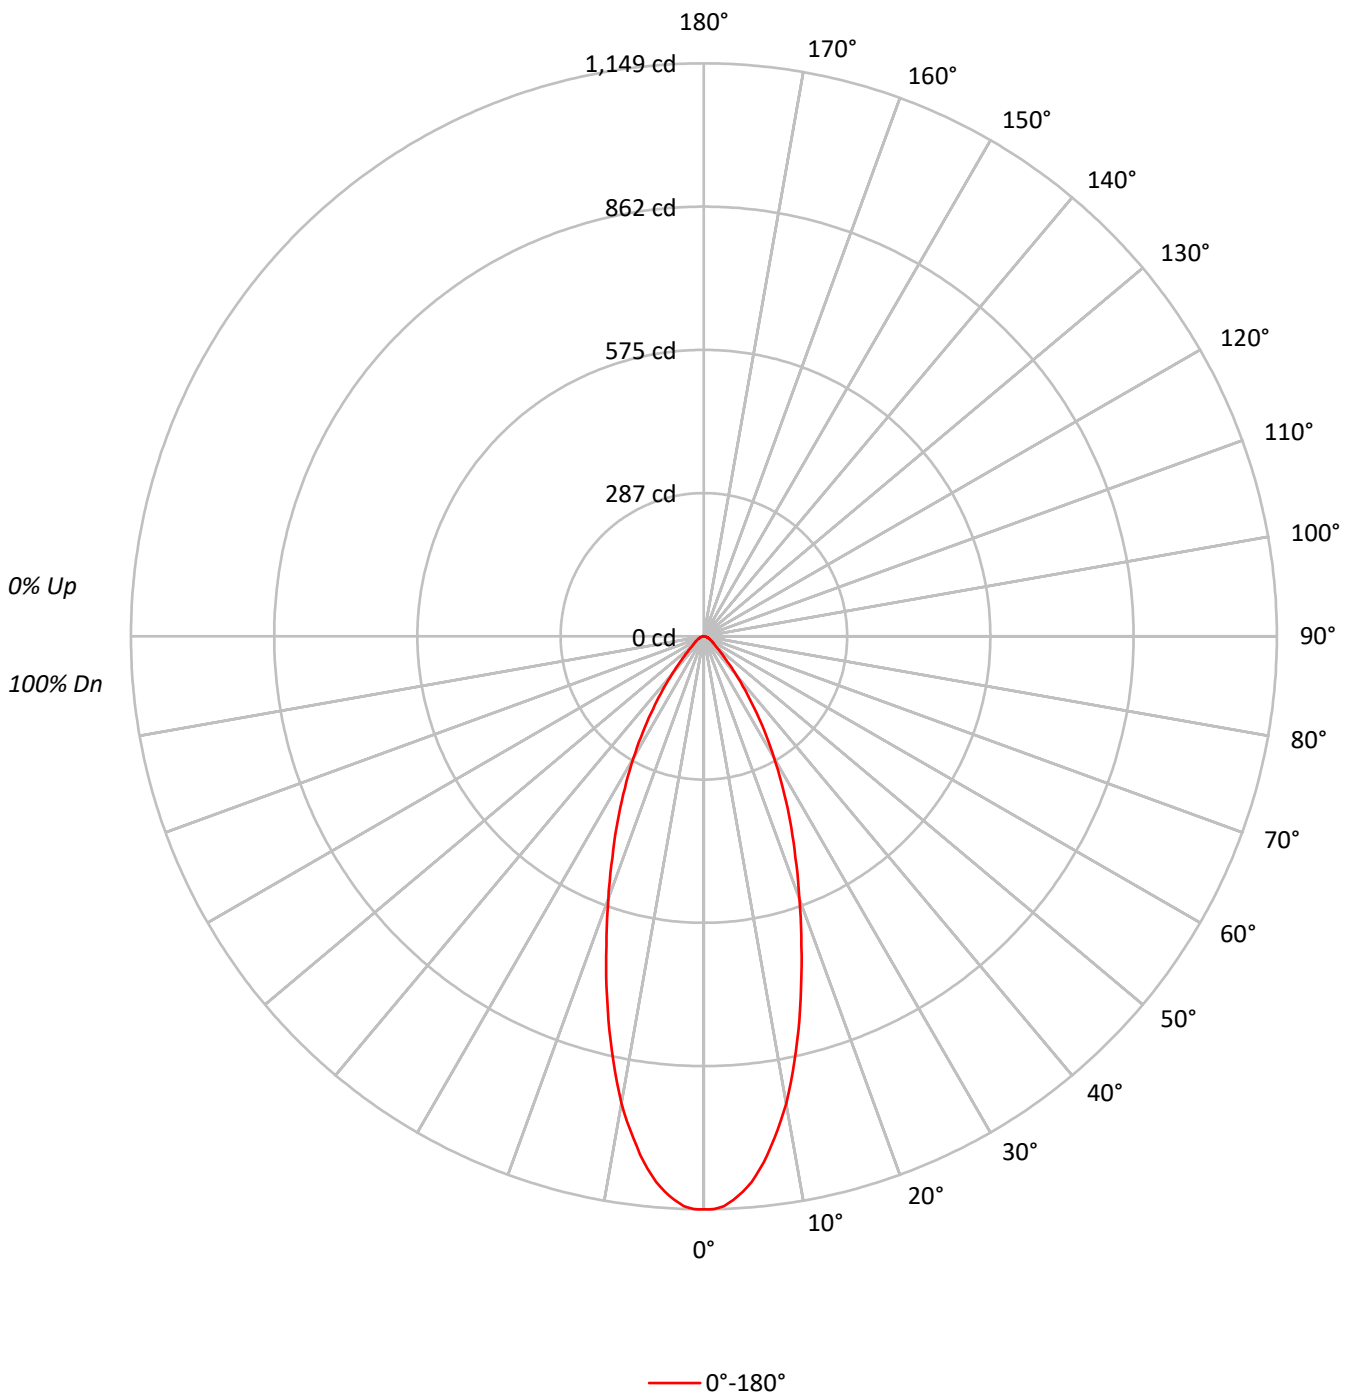



TEST NUMBER: P1299880

CATALOG NUMBER: P3AS17R25W2N902750DE010 E3DLP1WMH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	100.0	14.4
10°-20°	207.3	29.9
20°-30°	187.5	27.0
30°-40°	112.6	16.2
40°-50°	44.7	6.4
50°-60°	20.6	3.0
60°-70°	12.6	1.8
70°-80°	6.7	1.0
80°-90°	1.9	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	494.8	71.3
0°-40°	607.4	87.5
0°-60°	672.8	96.9
0°-90°	694.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	694.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1149	
5°	1098	100
15°	750	207
25°	409	188
35°	177	113
45°	54	45
55°	23	21
65°	13	13
75°	6	7
85°	2	2
90°	0	



TEST NUMBER: P1299880
CATALOG NUMBER: P3AS17R25W2N902750DE010 E3DLP1WMH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1149.0
1°	1149.0
2°	1143.6
3°	1131.7
4°	1116.6
5°	1098.2
6°	1074.4
7°	1047.3
8°	1016.0
9°	984.6
10°	951.0
11°	912.1
12°	872.1
13°	832.0
14°	792.0
15°	749.8
17.5°	650.3
20°	560.4
22.5°	479.3
25°	409.0
27.5°	343.0
30°	282.4
32.5°	227.2
35°	177.4
37.5°	135.2
40°	100.6
42.5°	73.6
45°	54.1
47.5°	41.1
50°	31.4
52.5°	26.0
55°	22.7
57.5°	19.5
60°	17.3
62.5°	14.1
65°	13.0
67.5°	10.8
70°	8.7
72.5°	7.6
75°	6.5
77.5°	5.4
80°	3.2
82.5°	2.2
85°	2.2
87.5°	1.1



TEST NUMBER: P1299880

CATALOG NUMBER: P3AS17R25W2N902750DE010 E3DLP1WMH_2700K

CANDELA DISTRIBUTION (continued):

90° | $\frac{0^\circ}{0.0}$

(END OF REPORT)