

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299889

Luminaire Tested: P3AS17R25W2N902750DE010 E3PH1MW_5000K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1299889
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R25W2N902750DE010 E3PH1MW_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 5000K CCT AND, 90CRI ,
E3PH1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1281.0 lumens
Efficiency: N/A
Efficacy: 66.0 lumens/watt
Spacing Criteria (0/90/45): 0.36 / 0.36 / 0.36
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1299889
CATALOG NUMBER: P3AS17R25W2N902750DE010 E3PH1MW_5000K

Luminous Intensity Polar Plot

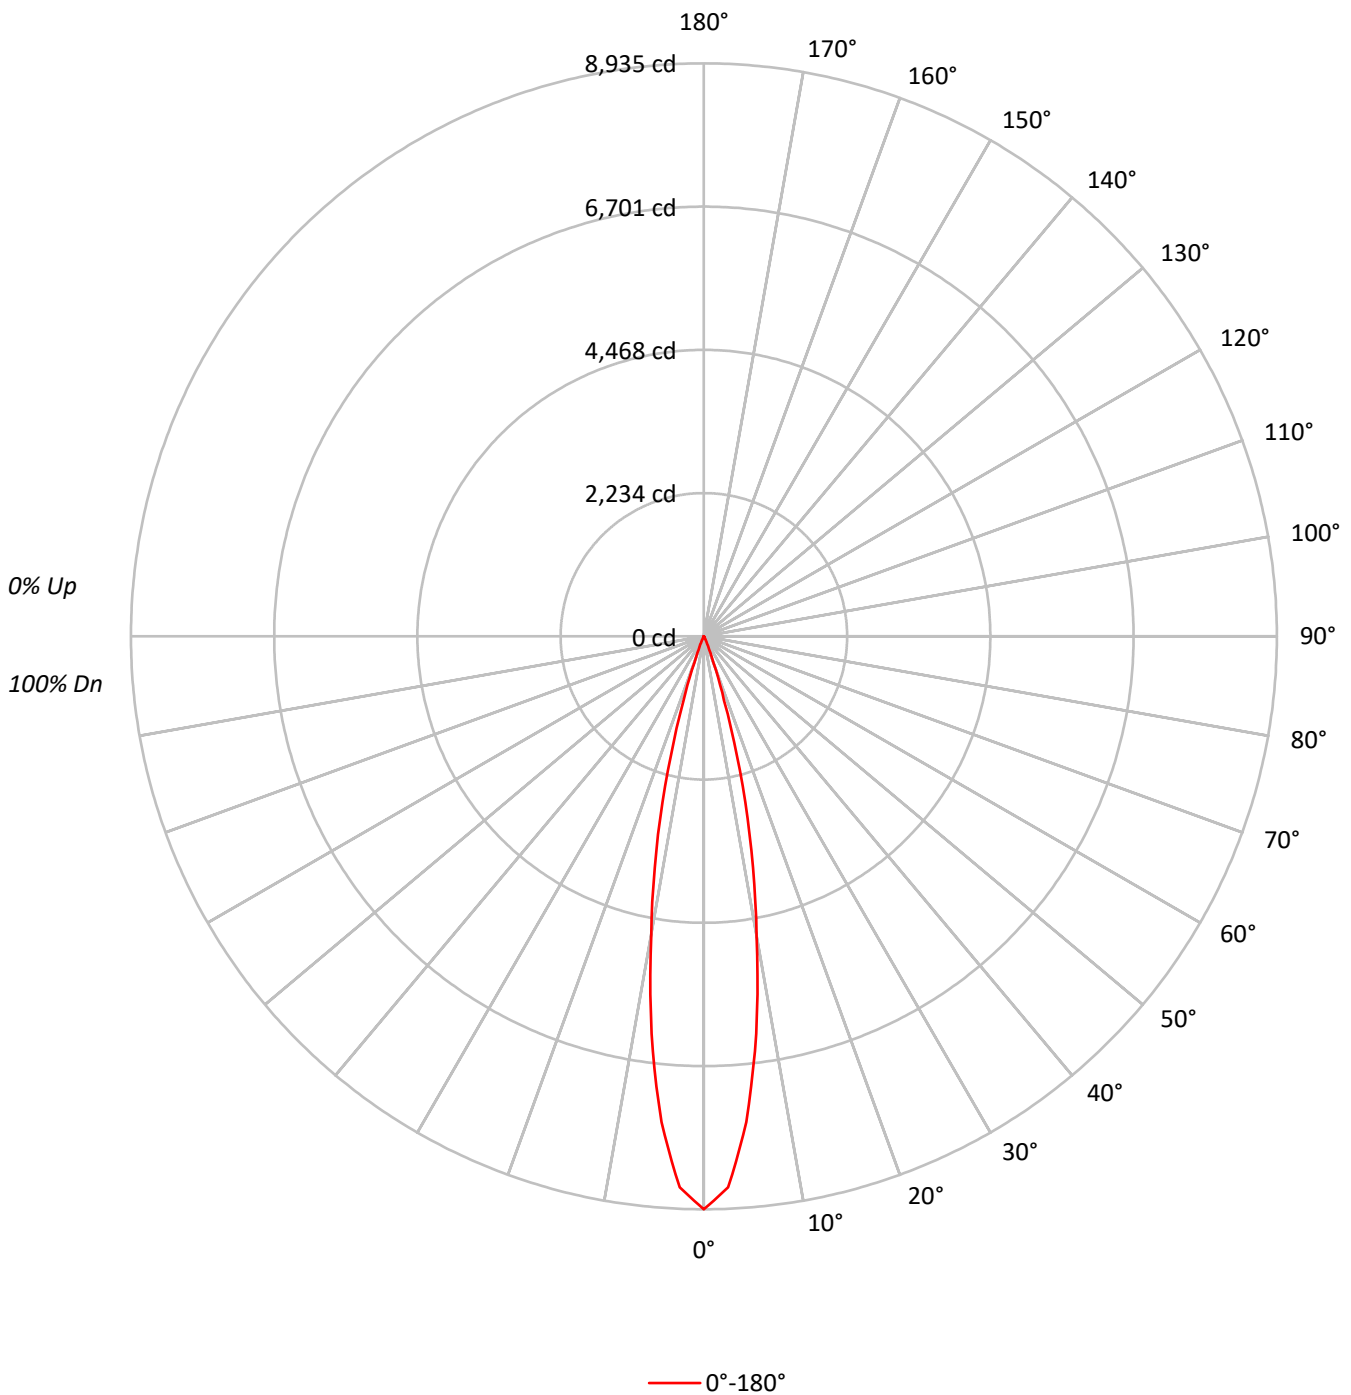



TEST NUMBER: P1299889

CATALOG NUMBER: P3AS17R25W2N902750DE010 E3PH1MW_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	102	101	100	99	99	98	98	98
2	113	109	107	105	111	108	105	103	105	103	101	102	100	99	99	98	97	99	98	97	96
3	110	106	103	100	108	104	102	99	102	100	98	100	98	96	98	96	95	98	96	95	94
4	107	103	99	97	106	102	99	96	100	97	95	98	96	94	96	95	93	96	95	93	92
5	105	100	96	94	103	99	96	93	97	95	93	96	94	92	95	93	91	95	93	91	90
6	102	97	94	91	101	97	93	91	95	93	91	94	92	90	93	91	89	93	91	89	89
7	100	95	92	89	99	95	91	89	94	91	89	93	90	88	92	89	88	92	89	88	87
8	98	93	90	87	98	93	89	87	92	89	87	91	88	87	90	88	86	90	88	86	85
9	97	91	88	86	96	91	88	85	90	87	85	89	87	85	89	86	85	89	86	85	84
10	95	89	86	84	94	89	86	84	88	86	84	88	85	83	87	85	83	87	85	83	83

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1959229
5°	1673317
10°	1054957
15°	490990
20°	101112
25°	20638
30°	4406
35°	937
40°	487
45°	0
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 0 cd/sqm



TEST NUMBER: P1299889

CATALOG NUMBER: P3AS17R25W2N902750DE010 E3PH1MW_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	633.5	49.5
10°-20°	588.4	45.9
20°-30°	55.7	4.3
30°-40°	3.2	0.3
40°-50°	0.2	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1277.6	99.7
0°-40°	1280.8	100.0
0°-60°	1281.0	100.0
0°-90°	1281.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1281.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8935	
5°	7602	634
15°	2163	588
25°	85	56
35°	4	3
45°	0	0
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1299889
CATALOG NUMBER: P3AS17R25W2N902750DE010 E3PH1MW_5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	8934.8
2.5°	8602.4
5°	7601.9
7.5°	6250.0
10°	4737.9
12.5°	3422.5
15°	2162.8
17.5°	1045.7
20°	433.3
22.5°	172.3
25°	85.3
27.5°	40.0
30°	17.4
32.5°	7.0
35°	3.5
37.5°	1.7
40°	1.7
42.5°	0.0
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)