

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299909

Luminaire Tested: P3AS17R25W2N902765DE010 E3CB1MMS_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1299909
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R25W2N902765DE010 E3CB1MMS_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 4000K CCT AND, 90CRI ,
E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1542.9 lumens
Efficiency: N/A
Efficacy: 79.5 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 19.4
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1299909
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3CB1MMS_4000K

Luminous Intensity Polar Plot

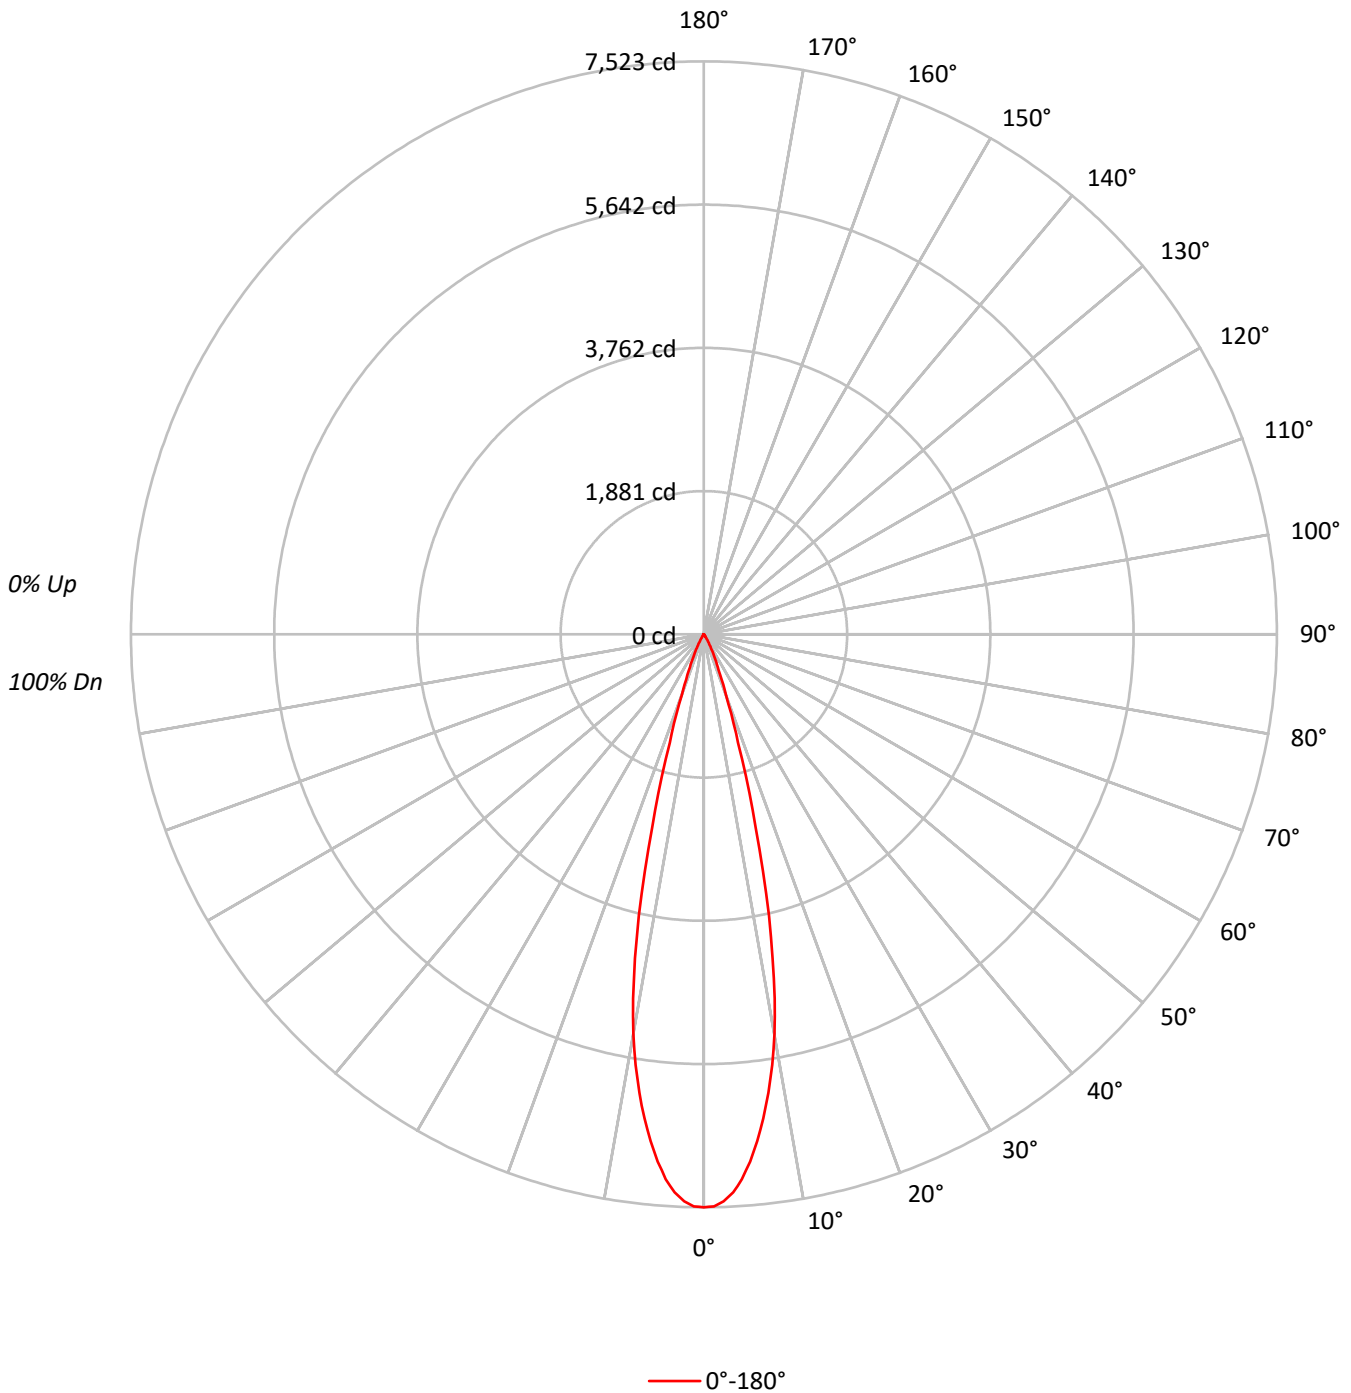



TEST NUMBER: P1299909

CATALOG NUMBER: P3AS17R25W2N902765DE010 E3CB1MMS_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	611.4	39.6
10°-20°	729.4	47.3
20°-30°	164.4	10.7
30°-40°	26.6	1.7
40°-50°	4.8	0.3
50°-60°	2.5	0.2
60°-70°	2.2	0.1
70°-80°	1.3	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1505.3	97.6
0°-40°	1531.9	99.3
0°-60°	1539.2	99.8
0°-90°	1542.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1542.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7523	
5°	6951	611
15°	2621	729
25°	321	164
35°	32	27
45°	5	5
55°	2	3
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1299909
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3CB1MMS_4000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	7523.2
1°	7511.1
2°	7450.5
3°	7338.9
4°	7170.4
5°	6951.0
6°	6689.2
7°	6405.5
8°	6080.6
9°	5725.4
10°	5329.0
11°	4872.0
12°	4345.9
13°	3795.5
14°	3205.2
15°	2620.9
17.5°	1493.5
20°	837.7
22.5°	505.5
25°	321.2
27.5°	197.6
30°	115.2
32.5°	60.6
35°	31.5
37.5°	20.6
40°	13.3
42.5°	8.5
45°	4.8
47.5°	3.6
50°	3.6
52.5°	3.6
55°	2.4
57.5°	2.4
60°	2.4
62.5°	2.4
65°	2.4
67.5°	2.4
70°	1.2
72.5°	1.2
75°	1.2
77.5°	1.2
80°	1.2
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1299909
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3CB1MMS_4000K

CANDELA DISTRIBUTION (continued):



(END OF REPORT)