

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299969

Luminaire Tested: P3AS17R25W2N902765DE010 E3DL1GPH\_4000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1299969  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-11)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R25W2N902765DE010 E3DL1GPH\_4000K  
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 4000K CCT AND, 90CRI ,  
E3DL1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 622.0 lumens  
Efficiency: N/A  
Efficacy: 32.1 lumens/watt  
Spacing Criteria (0/90/45): 0.49 / 0.49 / 0.51  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1299969  
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DL1GPH\_4000K

### Luminous Intensity Polar Plot

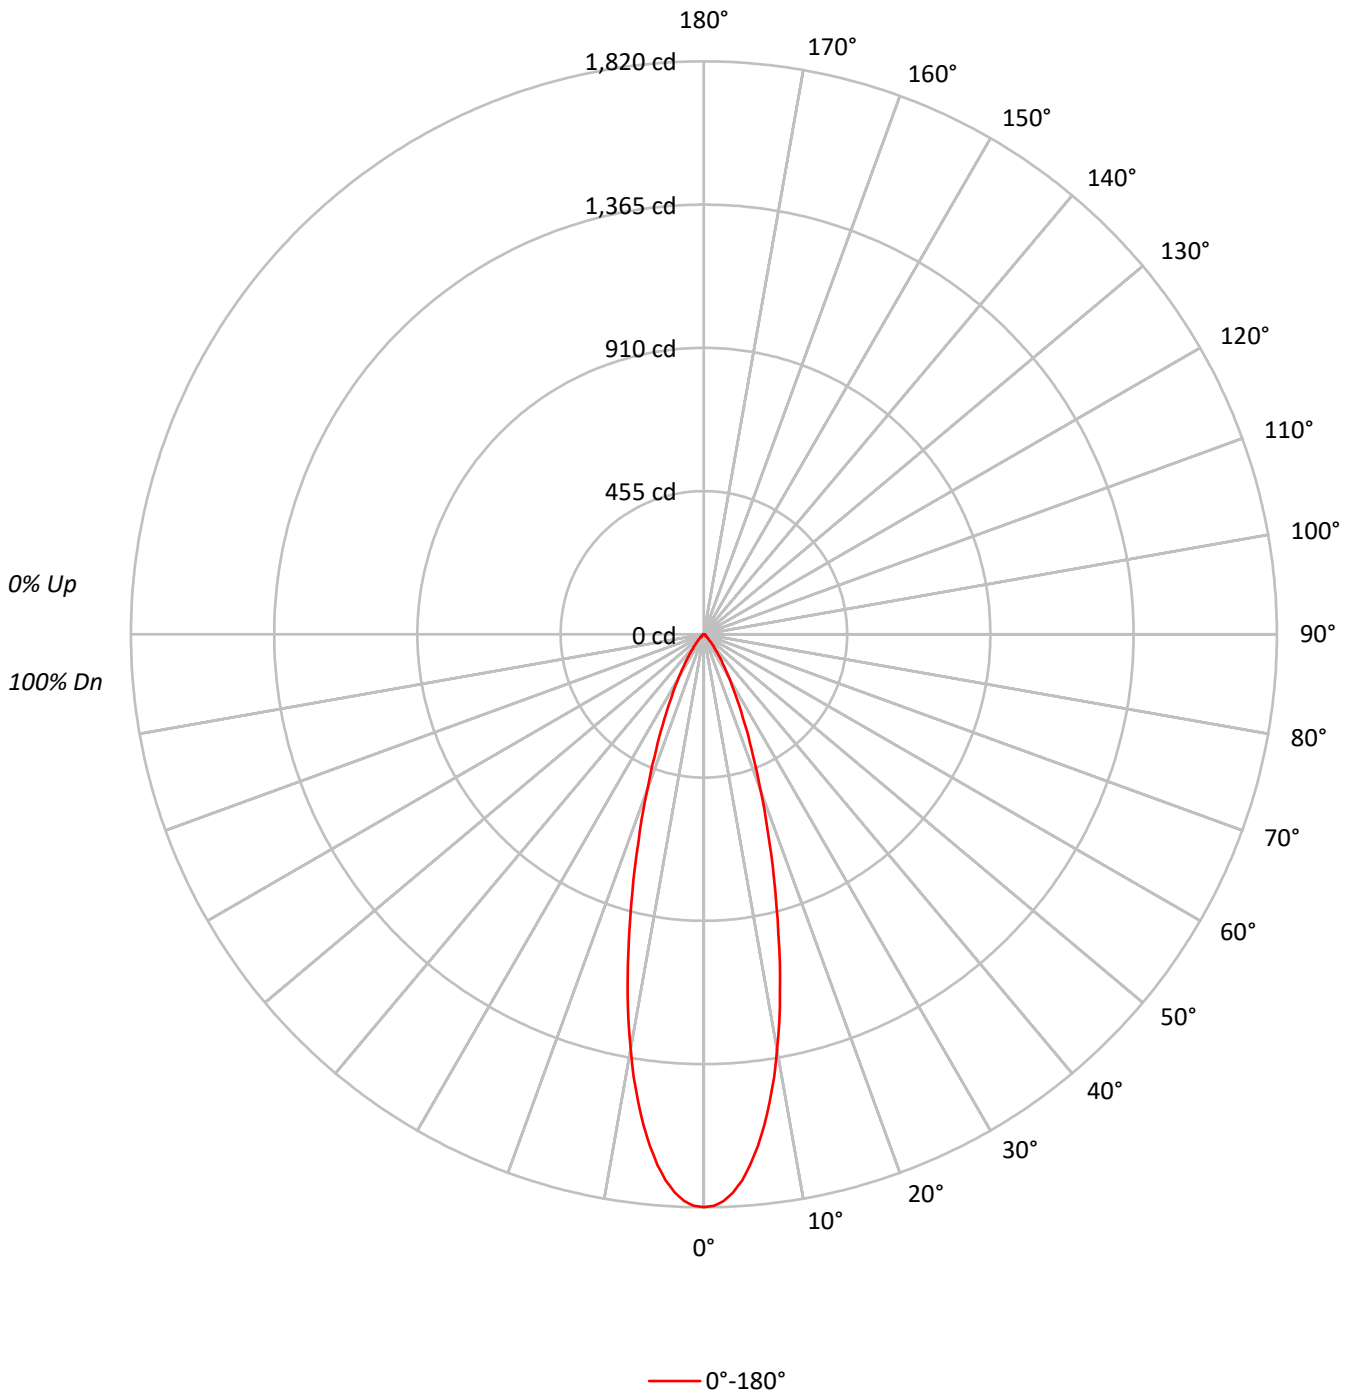



TEST NUMBER: P1299969

CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DL1GPH\_4000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20					
RC	80				70				50				30				10			0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98	97	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	93	92	95
2	110	105	102	99	107	104	101	98	101	98	96	98	96	94	95	93	92	90	91	89	87	90
3	105	100	96	92	103	98	95	91	96	93	90	94	91	89	91	89	87	86	91	89	87	86
4	101	95	90	87	99	94	89	86	92	88	85	90	87	84	88	85	83	82	88	85	83	82
5	97	90	85	82	96	89	85	81	88	84	81	86	83	80	85	82	79	78	85	82	79	78
6	94	86	81	78	92	86	81	78	84	80	77	83	79	77	82	78	76	75	82	78	76	75
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	75	73	72	79	75	73	72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69	76	73	70	69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	68	73	70	67	66	73	70	67	66
10	81	73	69	65	80	73	68	65	72	68	65	72	68	65	71	67	65	64	71	67	65	64

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	398981
5°	372242
10°	298191
15°	202408
20°	122487
25°	71617
30°	40791
35°	22433
40°	11908
45°	6264
50°	3650
55°	2714
60°	2324
65°	2491
70°	2308
75°	2033
80°	1515
85°	1510

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 6264 cd/sqm



TEST NUMBER: P1299969

CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DL1GPH\_4000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	150.1	24.1
10°-20°	245.1	39.4
20°-30°	140.1	22.5
30°-40°	55.3	8.9
40°-50°	16.9	2.7
50°-60°	6.7	1.1
60°-70°	4.5	0.7
70°-80°	2.5	0.4
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	535.3	86.1
0°-40°	590.5	94.9
0°-60°	614.1	98.7
0°-90°	622.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	622.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1820	
5°	1691	150
15°	892	245
25°	296	140
35°	84	55
45°	20	17
55°	7	7
65°	5	5
75°	2	3
85°	1	1
90°	0	



TEST NUMBER: P1299969  
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DL1GPH\_4000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1819.5
1°	1816.0
2°	1801.1
3°	1775.0
4°	1738.7
5°	1691.1
6°	1635.3
7°	1572.3
8°	1499.1
9°	1424.2
10°	1339.2
11°	1255.4
12°	1163.3
13°	1072.3
14°	979.0
15°	891.6
17.5°	691.3
20°	524.9
22.5°	394.1
25°	296.0
27.5°	219.3
30°	161.1
32.5°	116.5
35°	83.8
37.5°	59.4
40°	41.6
42.5°	28.5
45°	20.2
47.5°	14.3
50°	10.7
52.5°	8.3
55°	7.1
57.5°	6.5
60°	5.3
62.5°	4.8
65°	4.8
67.5°	4.2
70°	3.6
72.5°	3.0
75°	2.4
77.5°	1.8
80°	1.2
82.5°	1.2
85°	0.6
87.5°	0.6



TEST NUMBER: P1299969  
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DL1GPH\_4000K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)