

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1299972

Luminaire Tested: P3AS17R25W2N902765DE010 E3DL1H\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1299972  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-11)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R25W2N902765DE010 E3DL1H\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 2700K CCT AND, 90CRI ,  
E3DL1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1133.0 lumens  
Efficiency: N/A  
Efficacy: 58.4 lumens/watt  
Spacing Criteria (0/90/45): 0.49 / 0.49 / 0.51  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1299972  
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DL1H\_2700K

### Luminous Intensity Polar Plot

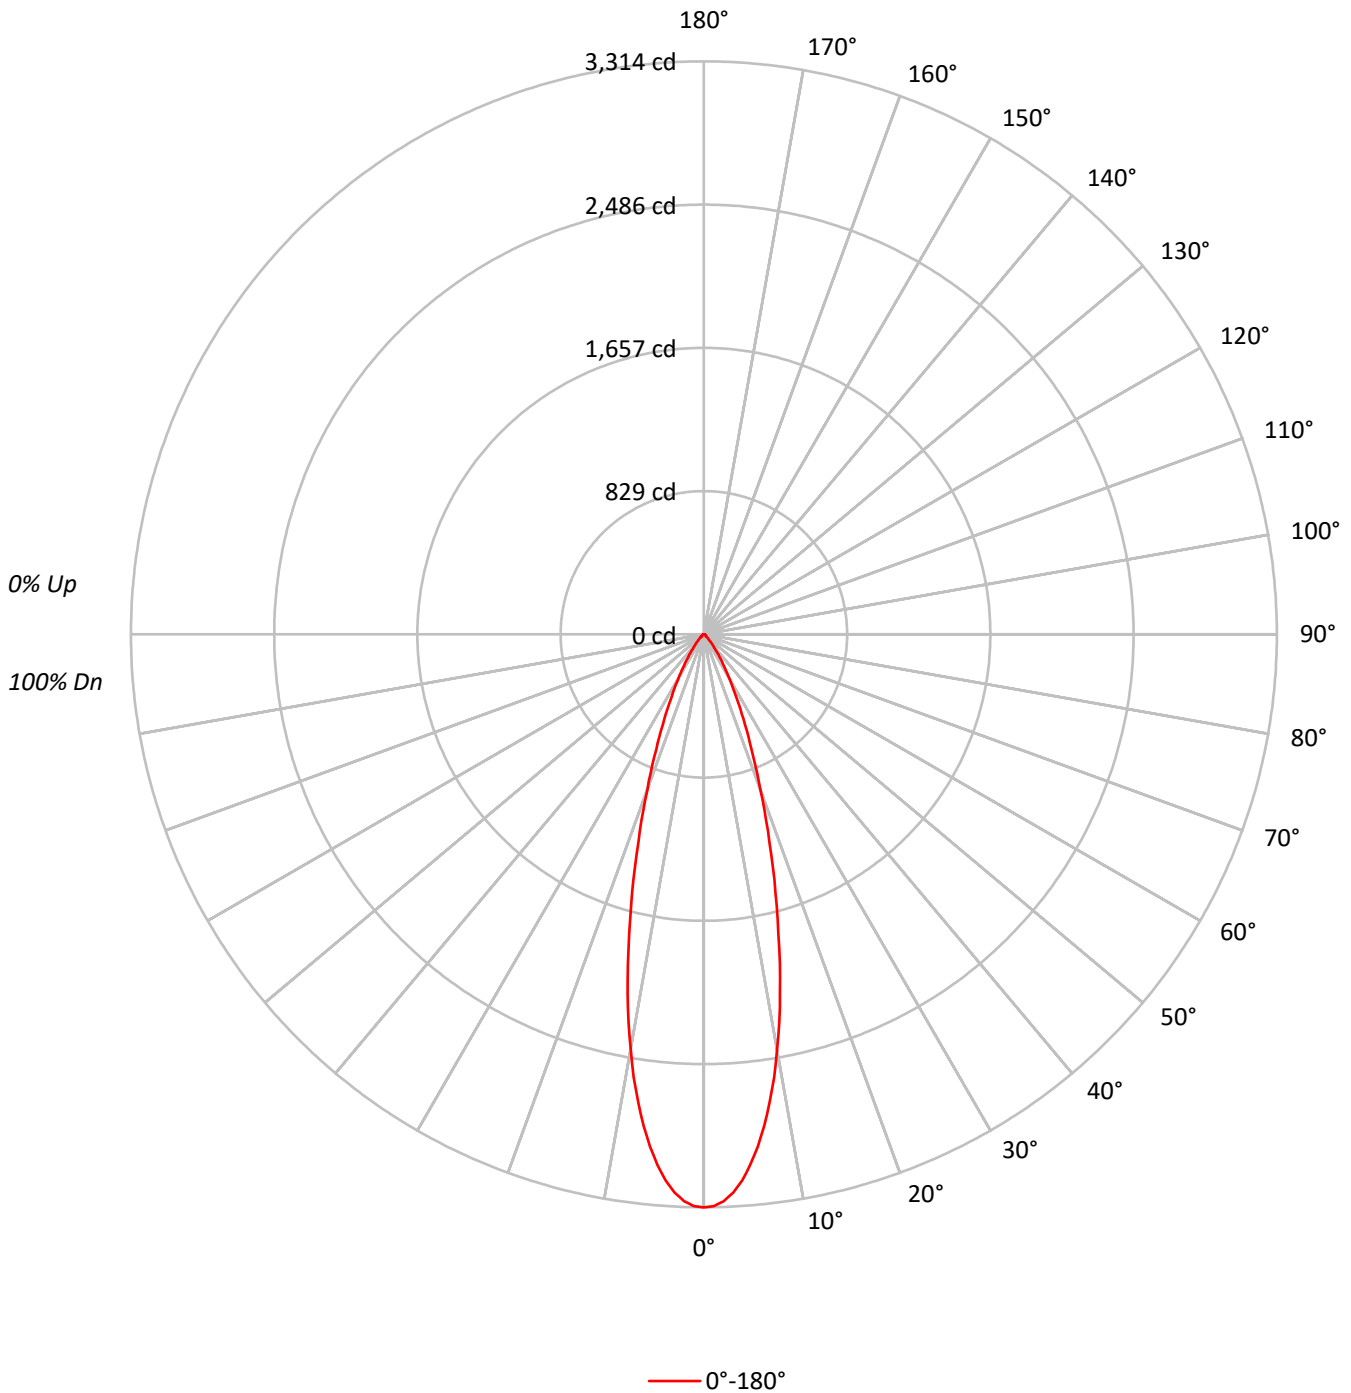



TEST NUMBER: P1299972  
 CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DL1H\_2700K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	105	102	99	107	104	101	98	101	98	96	98	96	94	95	93	92	90	90	90	90
3	105	100	96	92	103	98	95	91	96	93	90	94	91	89	91	89	87	86	86	86	86
4	101	95	90	87	99	94	89	86	92	88	85	90	87	84	88	85	83	82	82	82	82
5	97	90	85	82	96	89	85	81	88	84	81	86	83	80	85	82	79	78	78	78	78
6	94	86	81	78	92	86	81	78	84	80	77	83	79	77	82	78	76	75	75	75	75
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	75	73	72	72	72	72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69	69	69	69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	68	73	70	67	66	66	66	66
10	81	73	69	65	80	73	68	65	72	68	65	72	68	65	71	67	65	64	64	64	64

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	726784
5°	678074
10°	543187
15°	368719
20°	223109
25°	130459
30°	74290
35°	40877
40°	21698
45°	11412
50°	6652
55°	4970
60°	4254
65°	4514
70°	4167
75°	3643
80°	2778
85°	2768

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 11412 cd/sqm



TEST NUMBER: P1299972

CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DL1H\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	273.4	24.1
10°-20°	446.5	39.4
20°-30°	255.1	22.5
30°-40°	100.7	8.9
40°-50°	30.9	2.7
50°-60°	12.2	1.1
60°-70°	8.2	0.7
70°-80°	4.5	0.4
80°-90°	1.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	975.0	86.1
0°-40°	1075.7	94.9
0°-60°	1118.8	98.7
0°-90°	1133.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1133.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3314	
5°	3080	273
15°	1624	447
25°	539	255
35°	153	101
45°	37	31
55°	13	12
65°	9	8
75°	4	5
85°	1	1
90°	0	



TEST NUMBER: P1299972

CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DL1H\_2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3314.4
1°	3307.9
2°	3280.8
3°	3233.2
4°	3167.1
5°	3080.5
6°	2978.7
7°	2863.9
8°	2730.8
9°	2594.3
10°	2439.5
11°	2286.8
12°	2119.0
13°	1953.3
14°	1783.3
15°	1624.2
17.5°	1259.3
20°	956.1
22.5°	717.9
25°	539.2
27.5°	399.5
30°	293.4
32.5°	212.2
35°	152.7
37.5°	108.3
40°	75.8
42.5°	52.0
45°	36.8
47.5°	26.0
50°	19.5
52.5°	15.2
55°	13.0
57.5°	11.9
60°	9.7
62.5°	8.7
65°	8.7
67.5°	7.6
70°	6.5
72.5°	5.4
75°	4.3
77.5°	3.2
80°	2.2
82.5°	2.2
85°	1.1
87.5°	1.1



TEST NUMBER: P1299972  
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DL1H\_2700K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)