

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1300002

Luminaire Tested: P3AS17R25W2N902765DE010 E3DLD1GPH\_2700K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1300002  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R25W2N902765DE010 E3DLD1GPH\_2700K  
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 2700K CCT AND, 90CRI ,  
E3DLD1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 426.1 lumens  
Efficiency: N/A  
Efficacy: 22.0 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 19.4  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1300002  
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DLD1GPH\_2700K

### Luminous Intensity Polar Plot

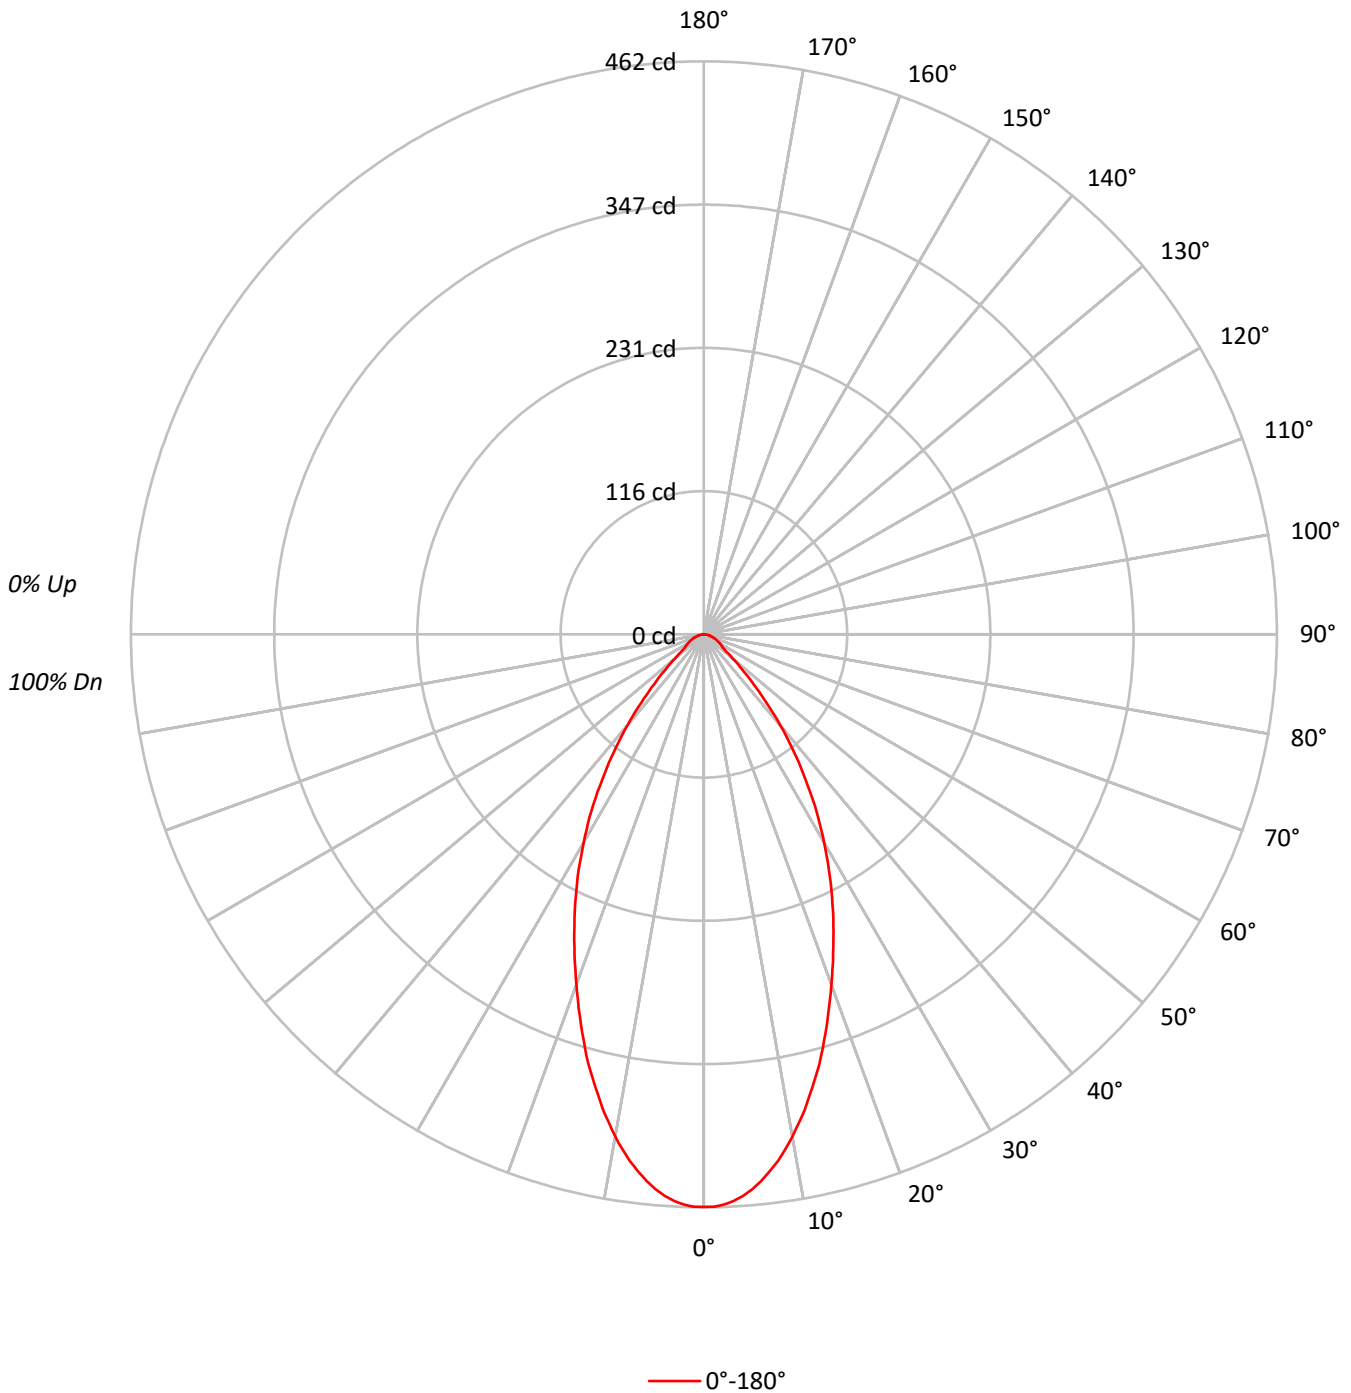





TEST NUMBER: P1300002

CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DLD1GPH\_2700K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	41.6	9.8
10°-20°	99.7	23.4
20°-30°	112.7	26.4
30°-40°	89.2	20.9
40°-50°	45.0	10.6
50°-60°	18.0	4.2
60°-70°	11.6	2.7
70°-80°	6.4	1.5
80°-90°	1.8	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	254.1	59.6
0°-40°	343.2	80.6
0°-60°	406.3	95.4
0°-90°	426.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	426.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	462	
5°	449	42
15°	359	100
25°	246	113
35°	143	89
45°	56	45
55°	19	18
65°	12	12
75°	6	6
85°	2	2
90°	0	



TEST NUMBER: P1300002  
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DLD1GPH\_2700K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	461.7
1°	461.7
2°	460.1
3°	457.5
4°	453.8
5°	449.0
6°	443.1
7°	436.2
8°	428.8
9°	420.3
10°	411.3
11°	401.2
12°	391.7
13°	380.5
14°	369.9
15°	359.3
17.5°	329.6
20°	300.4
22.5°	272.8
25°	246.2
27.5°	220.2
30°	193.7
32.5°	168.8
35°	142.8
37.5°	118.9
40°	96.1
42.5°	74.8
45°	56.3
47.5°	41.9
50°	30.3
52.5°	22.8
55°	18.6
57.5°	17.0
60°	14.9
62.5°	13.3
65°	11.7
67.5°	10.1
70°	8.5
72.5°	7.4
75°	5.8
77.5°	4.8
80°	3.7
82.5°	2.7
85°	1.6
87.5°	0.5



TEST NUMBER: P1300002  
CATALOG NUMBER: P3AS17R25W2N902765DE010 E3DLD1GPH\_2700K

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)